





THE LIBRARY
OF
THE UNIVERSITY
OF CALIFORNIA
DAVIS









STATE OF CALIFORNIA DEPARTMENT OF PUBLIC WORKS

PUBLICATIONS OF THE
DIVISION OF WATER RESOURCES
EDWARD HYATT, State Engineer

BULLETIN NO. 47

MOJAVE RIVER INVESTIGATION

1934

(Seal)
Department of Public Works

HARRIST TO SELECT

......

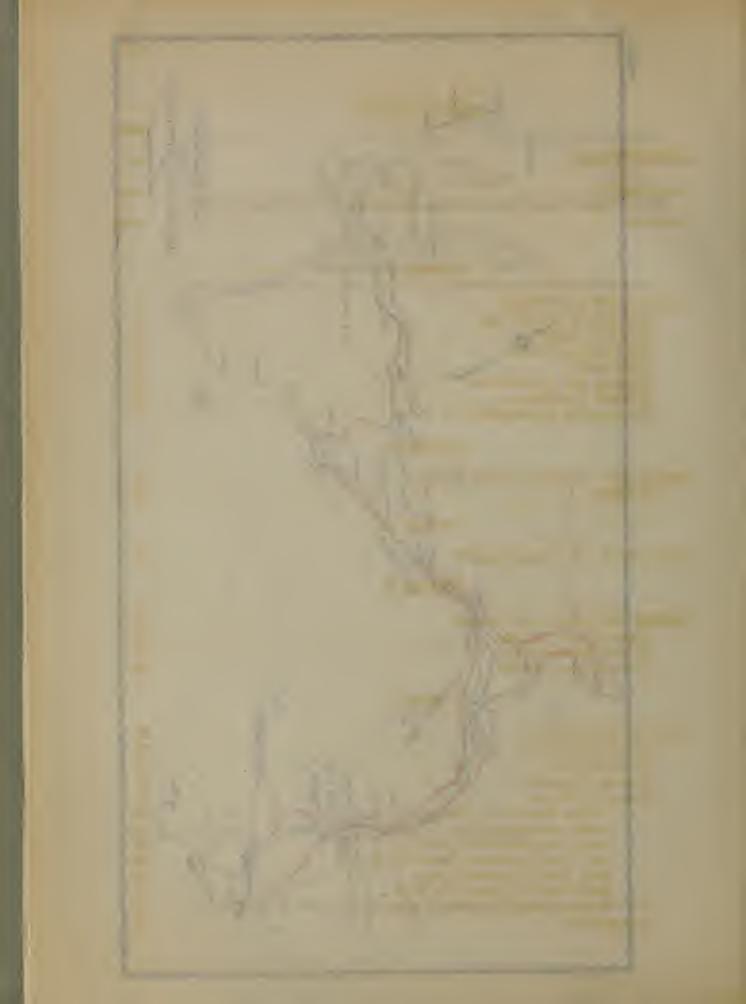


TABLE OF CONTENTS

	Page
ACKNOWLEDGMENTS	хi
ORGANIZATION	xii
FOREWORD	xii
CHAPTER I	
INTRODUCTION AND SUMMARY Previous Publications Scope of Report The Problem Stated Work Done Summary and Conclusions Surface Reservoirs Underground Reservoirs	1 1 2 2 2 2 3 8 9
CHAPTER II	
DESCRIPTION OF MOJAVE RIVER VALLEY	11 13
SOIL SURVEY AND CLASSIFICATION	14
CHAPTER IV	
GEOLOGY OF MOJAVE RIVER VALLEY Upper Mojave Valley Middle Mojave Valley Lower Mojave Valley	20 24 27 28
CHAPTER V	
MOUNTAIN HEADWATERS Arrowhead Project Precipitation Stream Discharge Reservoir Sites Victor Reservoir Site Forks Reservoir Site West Fork Reservoir Site No. 2 West Fork Reservoir Site No. 3 Deep Creek Reservoir Site Grass Valley Reservoir Site Holcomb Creek Reservoir Site Evaporation	32 32 36 37 40 40 40 42 43 44 44 45 45

A SECTION

II OF OUR

III STATE

P STATES

TABLE OF CONTENTS (Continued)

CHAPTER VI	Page
HYDROLOGY	46
Stream Gaging Stations	48
Measured Losses of Water in Plains Area	50
From the Forks to Upper Narrows	50
Upper Narrows to Lower Narrows	52
The Forks to Lower Narrows	55
Lower Narrows to Barstow	
Inflow from West Cide helew Texas Normana	56
Inflow from West Side below Lower Narrows	57
Loss Hodge to Barstow	59
Barstow to Afton	59
Forks to Afton	60
Beneficial Consumptive Use of Water	61
Disposal of Water	62
Water Table	65
Area of Influence of Mojave River	66
Pressure Areas	67
Fluctuations of Water Table	68
CHAPTER VII	
DEVELOPMENT	70
Spreading in Valley	77
Summary	77
APPENDIX 1	
TARITATIONS .	770

The second secon THE PERSON NAMED IN COLUMN TWO The second state of the later o were traded to recognity to pro-THE RESERVE AND ADDRESS OF THE PERSON NAMED IN 11 0

INDEX OF TABLES

Table		Page
	CHAPTER I INTRODUCTION AND SUMMARY	
1	Rating of Soils as to Value for Agriculture in Area for which Soil Survey has been made in Mojave Valley	5.
S	Estimated Average Annual Water Available in Mojave River	6
3	Approximate Average Disposal of Water of Mojave River, 29 year period 1905-06 to 1933-34	7
4	Surveyed Reservoir Sites - Mojave River	9
5	Estimated Capacity of Underground Basins above Barstow .	10
	CHAPTER II DESCRIPTION OF MOJAVE RIVER VALLEY	
6	Irrigated Area in Mojave Valley dependent on Mojave River	13
	CHAPTER III SOIL SURVEY AND CLASSIFICATION	
7	Agricultural Ratings of Soil Grades	15
8	Agricultural Value of Soils in Mojave River Valley covered by Survey of University of California, 1932, and U. S. Department of Agriculture, cooperating with University of California, 1921	16
9	Agricultural Value of Soils in Mojave Basin - Summary of Table 8	17
10	Agricultural Value of Soils in Mojave River Valley covered by Soil Survey of 1921 but outside of maps in pocket .	17
11	Names and Descriptions of Soils in Different Gradings for Agricultural Suitability	18

CHAPIER IV GEOLOGY

(No tables)

	State of the latest lat	
11.		
	CONTRACTOR OF THE PARTY OF THE	

1

INDEX OF TABLES (Continued)

Table		Page
	CHAPTER V MOUNTAIN HEADWATERS	
12	Principal Precipitation Stations maintained by Arrowhead Corporation and others in and near Mountain Headwaters of Mojave River	37
13	Stream Gaging Stations maintained by Arrowhead Corporation and U. S. Geological Survey in Mountain Headwaters of Mojave River	39
14	Victor Reservoir Site Capacity Table	40
15	Forks Reservoir Site Area and Capacity Table	41
16	East Fork Mojave River - Estimated Discharge	41
17	West Fork Mojave River - Estimated Discharge	42
18	West Fork Reservoir Site No. 2 - Area and Capacity Table .	43
19	Estimated Discharge West Fork Reservoir Site No. 2	43
20	West Fork Reservoir Site No. 3 - Area and Capacity Table .	44
21	Estimated Discharge West Fork Site No. 3	44
22	Evaporation at Lake Arrowhead	45
	CHAPTER VI HYDROLOGY	
23	Loss from Forks to Upper Narrows	50
24	Rising Water at Upper Narrows and Consumptive Use, Forks to Upper Narrows	52
25	Average of Isolated Measurements by U. S. Geological Survey at Upper and Lower Narrows, 1931-32	53
26	Comparison of Discharges at Upper and Lower Narrows except in Time of Flood	53
27	Estimated Loss and Gain Upper to Lower Marrows	54
28	Difference in Flow - Forks and Lower Narrows	55
29	Difference in Flow - Lower Narrows and Point of Rocks	56

	The state of the s	p3 b
		E.C.
		Hi
à	er emiliaren de la companya esta	
	The second secon	Ē
	The second of the second section is not a second section of the	PE
	property and the second of the standard and their	
	the state of the second	ME
	to the management of the cold terminal by they	
	Note that the second of the second	
	A THE RESERVE OF THE PERSONNEL PROPERTY.	
-01	The second second second second second second	
	Service and will prove the service way of the relationships.	
W		
1.0		

INDEX OF TABLES (Continued)

Table	CHAPTER VI HYDROLOGY (Cont.)	Page
30	Difference in Flow - Upper Narrows and Hodge	56
31	Stream Flow from Lower Narrows to Hodge - Average of Measurements	57
32	Loss of Water - Hodge to Berstow	59
33	Loss of water - Mountains to Afton 1931-32	60
34	Disposal of Water in Nojave Basin below Mountains, 1931-32.	63
	CHAPTER VII DEVELOPMENT POSSIBILITIES AND GENERAL PLANS	
35	Estimated Average Annual Water Available in Mojave Valley for Different Periods	70
36	Storage Capacity Necessary for Various Safe Annual Yields including Evaporation, Transpiration, and Rising Water passing out of Basin, for the 29 year period 1905-06 to 1933-34	71
37	Surveyed Capacity of Known Reservoir Sites in Mountain Headwaters and Estimated Average Annual Discharges	71
38	Estimated Capacity of Underground Basins	72
	APPENDIX 1 TABULATIONS OF DATA	
39	Monthly and Seasonal Precipitation at Stations Ash Meadows Big Bear Lake Dam Burton Ranch Crab Park Daly Summit Deep Creek Fleming's Mill Forks of Mojave Gate House in Little Bear Valley Grass Valley at Saw Mill Green Valley at Toll House Heap's Peak Helendale Hesperia	79 80 81 83 84 84 85 86 87 88 90 91 91 92 93

. . . To the second se ---- burn out that and a second THE REAL PROPERTY AND ADDRESS OF THE PARTY AND WILLIAM TOWNS THE PARTY AND THE PARTY OF THE the point for protection of the point of the latest the second to the contract to the party of the last the las THE RESERVE TO SERVE THE PERSON the court of the latest transfer and the plant of busyons THE RESIDENCE OF THE PARTY OF T A CONTRACT OF THE PARTY OF THE - In the second countries of the second college of the second coll THE RESERVE THE PERSON NAMED IN

INDEX OF TABLES (Continued)

Table		Page
	APPENDIX 1	
	TABULATIOUS OF DATA	
	(Cont.)	
5 0		0.4
39	Holcomb Creek	
	Holcomb Creek, Upper, in Holcomb Valley	
	Huston Flat	
	Kuffels	
	Los Flores Ranch	-
	Burcham Ranch	
	Measor's	
	Morse's	
	Ridge	
	Squirrel Inn	
	Strawberry Flat	
	Summit No. 2	
	Talmadge	
•	Tunnel No. 2	
	Upper Toll Gate	
	Victorville	. 104
40	Monthly and Seasonal Discharge at Gaging Stations	. 105
40	Buck Creek above junction with Crab Creek	
	Cedar Creek	
	Cox's Creek	
	Crab Creek above junction with Buck Creek	
	· · · · · · · · · · · · · · · · · · ·	
	Crab Creek below junction with Buck Creek	
	Deep Creek below Green Valley Creek	
	Dry Creek	
	East Fork of Mojave River above junction with West Fork	
	Fern Creek	
	Grass Valley Creek	
	Guernsey Creek	
	Holcomb Creek	
	Hook's Creek	
	Huston Flat Creek	
	Little Bear Creek at Dam Site	
	Little Bear Reservoir at North End of Tunnel No. 1	
	Midway Creek	. 113
	Mill Creek	. 113
	Mojave River below Forks	. 114
	Mojave River at Victorville	. 115
	Mojave River at Lower Narrows	. 115
	Mojave River at Point of Rocks	. 116
	Mojave River near Hodge	116
	Mojave River at Barstow	. 116
	Mojave River at Afton	. 117
	Pine Creek	. 117
	Rock Camp Creek	. 117
	Rocky Gulch	. 118
	Saddle Creek	. 118

and the same

INDEX OF TABLES (continued)

Table	APPENDIX 1 TABULATIONS OF DATA (Cont.)	Page
40	Shake Creek	118
	Sheep Creek	119
	Tunnel "C"	119
	West Fork of Mojave River	120
41	Omitted	121-12
42	Miscellaneous Discharge Measurements from F. C. Finkle	123
43	Records of Water Levels at Wells	125
44	Areas of Natural Vegetation on Different Soil Classifications	249

INDEX OF PLATES

Plate		Fage
1	KEY MAP OF AREA INVESTIGATED	Frontispiece
2	LOCATION OF STREAM FLOW AND PRECIPITATION GAGING STATIONS MAINTAINED BY LAKE ARROWHEAD CORPORATION	38
3	WATER LEVEL FLUCTULTIONS AT TEST WELLS OF LAKE ARROWHLAD CORPORATION	64
	MAPS IN POCKET	
4-A	AGRICULTURAL VALUE OF SOILS - Upper Mojave Valley	
4-B	AGRICULTURAL VALUE OF SOILS - Middle Mojave Valley	
4C	AGRICULTURAL VALUE OF SOILS - Lower Mojave Valley	
5-A	LOCATION OF WELLS AND GROUND WATER TABLE CONTOURS - Upper Mojave Valley	
5-B	LOCATION OF WELLS AND GROUND WATER TABLE CONTOURS - Middle Mojave Valley	
5C	LOCATION OF WELLS AND GROUND WATER TABLE CONTOURS - Lower Mojave Valley	

DARK WILL

	- 6
military new little and the same	-
STATE OF THE PART AND ADDRESS.	
HAR SHOW IN MARK THE PART AND ADDRESS.	
THE PERSON NAMED IN	
- movement and the latest of t	
- THE RESIDENCE OF THE PARTY OF THE PARTY.	

ACKNOWLEDGMENTS

All stream measurements, measurements at Wells, in valley, precipitation measurements and evaporation were made available by Mr. J. P. Van Nuys, President of the Arrowhead Corporation.

Mr. W. P. Rowe made available numerous measurements of water table at wells made by himself and also gave freely both officially and unofficially from his great store of information concerning Mojave Basin.

Messrs. F. C. Finkle, J. B. Lippincott, and George Adams of Los Angeles, Mr. Dix Van Dyke of Daggett, and Mr. C. A. Foster of Victorville furnished information of great value.

This help has been greatly appreciated.

TO SOUTH

ORGANIZATION

Earl Lee Kelly	Director of Public Works
Edward Hyatt	State Engineer
000	
This investigation was under the general of and this report is by Harold Conkling Deputy State Engineer	
000	
The field work done by the Division of Water was under the direction of W. P. Rowe	r Resources

Office computations and analyses were done by

George B. Gleason
Senior Hydraulic Engineer - Water Resources
assisted by

- H. C. Kelly Assistant Hydraulic Engineer
- E. L. Clark Assistant Hydraulic Engineer
- J. C. Kimble- Junior Engineer Goologist

Chapter on Geology was written by

J. C. Kimble Junior Engineer Geologist

Drawings are by

J. T. Maguire - Senior Delineator Hellmuth Schmidt - Senior Delineator

711-

The same of the sa

-

•

and the same and a liberary with

FOREWORD

This report deals primarily with the hydrology of Mojave

Basin and is obviously of a preliminary nature. Much more information is necessary to lay out a plan for extensive development if the situation is judged to be favorable for such development. A solution of the possible legal complications is needed.

This investigation is a part of the state wide investigation of and plans for utilization of the water resources of the state. This has been completed in some areas and still in progress in others, notably Southern California.

-

CHAPTER I

INTRODUCTION AND SUMMARY

The investigation of Mojave River Basin was started with funds provided by Chapter 832, Statutes of 1929. As little information concerning the hydrology of the valley was available and as knowledge of this is a prerequisite for any planning these funds were devoted to securing this information and similar work was continued during the succeeding bienniums with such funds as were available. These funds have not been sufficient to develop plans for a project and much more work is necessary for accurate knowledge of the hydrology. The work done by the U. S. Geological Survey and by the U. S. Division of Irrigation, Bureau of Agricultural Engineering was financed by cooperative financial agreement between the State and the Government.

Previous Publications

- (1) Water Supply Paper No. 140, United States Geological Survey, 1905, "Field Measurements of the Rate of Movement of Underground Waters", by Charles S. Slichter.
- (2) Water Supply Paper No. 578, United States Geological Survey, 1929, "The Mojave Desert Region, California", by David G. Thompson.
- (3) Bulletin No. 5, California State Department of Engineering, 1918, "Report on the Utilization of Mojave River for Irrigation in Victor Valley, California", by Mojave River Commission.
- (4) U. S. Department of Agriculture, 1924, "Soil Survey of Victor-ville Area", by A. E. Kocher and Stanley W. Cosby.
- (5) Bulletin No. 44, California State Division of Water Resources, 1933, "Water Losses under Natural Conditions", by Harry F. Blaney.
- (6) Bulletin No. 541, United States Geological Survey, 1914, "Reconnaissance of the Barstow-Kramer Region", by R. W. Pack.
- (7) Bulletin No. 613, United States Geological Survey, 1916, "Guidebook of the Western United States, Part C, The Santa Fe Route", by N. H. Darton.
- (8) California Univ. Dept. Geology Bulletin, Vol. 7, No. 24, 1914, "Pleistocene Beds at Manix, in the Eastern Mojave Desert Region", by J. P. Buwalda.

THE SHOP

to the blank of

- (9) Water Supply Papers Nos. 81, 100, 134, 177, 213, 705, 720 and 735, United States Geological Survey.
- (10) Int. Geol. Congress Guidebook 15, 1932, "Excursion to the San Andreas Fault, and Cajon Pass", by L. F. Noble.

Scope of Report

The report is limited to a brief discussion of the geology and physical characteristics of the region and to a discussion of the hydrology in so far as the data available justifies. No attempt is made to lay out a specific project and methods of conservation are discussed only in a general way. Dam sites were not explored.

All data gathered are published herein or in Water Supply papers of the U. S. Geological Survey. Data from Lake Arrowhead Corporation are published in a separate mimeographed publication of the Division of Water Resources.

The Problem Stated

Mojave River Valley does not have a problem of present overdraft to correct which makes conservation necessary or desirable. Rather the problem presented is how to bring about greater utilization of the water supply which is made difficult by economic and legal considerations. Flood control works may be desirable if large development occurs.

Work Done

A survey was made by airplane in October, 1929, and from the photographs the base map contained in pecket was drawn. Measurements of depth to water at wells were begun in fall, 1929, and continued by Division of Water Resources personnel until the funds provided by Chapter 832, Statutes of 1929, were exhausted in the summer of 1931. After that date well measurements were taken by the U. S. Geological Survey, which organization has taken all stream measurements and calculated all discharges at stations maintained by it.

The second of th

District Street

DANGERS OF

65.5

The U.S. Division of Irrigation, Bureau of Agricultural Engineering, made estimates of plant transpiration and evaporation at a station southeast of Victorville along the river.

All former well measurements by W. P. Rowe were made available and all those taken for the Arrowhead Corporation and its predecessors. This company also made available all stream measurements, precipitation data and evaporation data both in valley and mountains. From these data the Division of Water Resources calculated daily discharges at all stations. The monthly and seasonal discharges are incorporated in this report. F. C. Finkle also made stream measurements and well data available.

Summary and Conclusions

The principal supply of Mojave River comes from 217 square miles of mountain headwaters which area covers practically the entire northern slope of San Bernardino Mountains, of which 212 square miles are above the lowest stream gaging stations on its forks. It also receives the underflow from the mountains on the west as far as Sheep Creek and the negligible contributions from the drainage area to the east of the headwaters proper. The stream flows north and east 120 miles and is lost in the dry lakes of the desert.

The climate is typically arid. Precipitation averages three to five inches in the valley, the elevation of which is 3000 feet at the mountain toe and falls to about 1400 feet at Afton, 90 miles northeast measured along the river, and the lower limit of the area covered by the investigation. Average annual temperature at Barstow near the middle of the valley and at elevation 2100 is 63 degrees.

The largest towns are Barstow, with a population of 2455, and Victorville, with a population of 2165. Other small communities are Yermo, Daggett and Hesperia.

THE TAXABLE PARTY.

The first of the f

The valley is well supplied with transportation, being traversed by main lines of the Santa Fe and the Union Pacific railroads and also by two main State and Federal highways. The highways use the same road bed through the narrow central part of the valley and the railroads do also. Several plans of considerable magnitude have been proposed for additional irrigation development and several hundred thousand dollars are said to have been spent in forwarding them but the results are negligible. Two irrigation districts have been formed but no development has been done under either.

Much of the area of the valley has been taken up by homesteads and desert entries. There was, at the time of the survey made by the Division of Water Resources in 1929 of the area influenced either by surface or underflow of the river, a total area of 6019* acres irrigated scattered through the valley but mainly in the upper end. The area irrigated is supplied at points of rising water along the river or by pumping. Aside from these points the stream is dry for about six to eight months of the year after it leaves the mountains.

Soil surveys covering 409,145 acres by the University of California and U. S. Department of Agriculture have been made. The area covered is shown on Key Map and the distribution of the different classifications

^{*} Census figures of 1929 show a considerably smaller amount of irrigated land. Likewise the report by the University of California on its soil survey shows a considerably smaller area in 1932. The reasons for this are unknown but one may be that areas in orchard shown by the photographs and considered irrigated were not irrigated and had been abandoned. The exact acreage irrigated is not of great importance to this report. If less is irrigated the beneficial consumptive use given in various tables in the report would be less but the non-beneficial use would be more.

A reconnaissance field investigation of a part of the area indicates abandonment of some of the area supposedly cropped in 1929 and for this report the beneficial consumptive use of crops is taken as 15,400 acre feet instead of 16,800 acre feet which would result if the estimated 2.8 acre feet per acre were applied to 6019 acres.

for that part covered by the maps of the Division of Water Resources in this report is shown on Plates 4-A to 4-C in pocket; 45,883 acres of this total are not shown on the map. The University has classified the lands according to their agricultural value, as shown in Table 1. The classification is based on soil quality and does not consider fertility except as indirectly influenced by soil quality nor does it consider climate or transportation.

Rating of Soils as to Value for Agriculture in Area for which Soil Survey has been made in Mojave Valley

Grade Number	Agricultural Rating	Acres
1	Excellent	1,024 65,035
2 3	Good Fair	184,903
4	Poor	56,184
5 6	Very poor No agricultural value	67,227 34,772
0	110 0051100110010010010010010010010010010010	409,145

These different classifications of land are scattered indiscriminately through the area, but the area above Barstow contains the larger percentage of the better soils.

The Mojave River is a distributive stream to a large extent below Hodge and waters lost from it by percolation drift away from the stream underground. The gross area influenced by Mojave River, that is, the area the water supply of which, either surface or underground, is wholly or partly dependent on the river and the underflow escaping from the river is estimated to be 339 square miles.

The exact boundary is open to question. There are four parcels within the total area included into which the movement of groundwater from Mojave River must be very small. These are (1) the parcel west of

Mojave River above Victorville except close to the river (whatever supply this receives from the Mojave comes from West Fork); (2) the parcel on the west side of Hinkley Valley between the river and Hinkley station; (3) the parcel north of Hinkley Valley bounded on the north by a line along the south side of the numerous extrusions of bedrock found in that vicinity; (4) the entire parcel east of Forks-of-the-Road Fault. The total area of these is about 150 square miles. Into these parcels the movement of water is so small that only a very small percentage of their area could be irrigated from the supply.

The average annual discharge from the mountains through the main river and the increment from ground water flow below Victorville in the 29 year period beginning 1905 are together estimated to approximate 97,000 acre feet. During the period of rainfall records which started in the mountains in 1883-84 there have been periods of ten and twelve years of very subnormal rainfall during which the runoff from the mountains averaged a little more than 50 per cent of the 29 year average.

The estimated water supply of the river for different periods is shown in Table 2.

Table 2

Estimated Average Annual Water Available in Mojave River
Acre Feet

	Period	<u>Years</u>	Mountain <u>Discharge</u>	Inflow from Springs*	Total
1883-84	to 1894-95	12	219,000	7,000	226,000
1895-96	to 1904-05	10	42,000	7,000	49,000
1905-06	to 1921-22	17	122,000	7,000	129,000
1922-23	to 1933-34	12	46,000	7,000	53,000
1905-06	to 1933-34	29	90,000	7,000	97,000

^{*}The estimate for 1931-32 is used for all periods as the distance from the area where these waters get underground to the river is considerable and cyclic variations would be more or less obliterated.

• ,

Along practically the entire length of the stream, except the and first ten miles below the mountains/a reach of five miles the lower end of which ends about five miles above Barstow, the water table is high, supporting principally cottonwoods but also some tules and salt grass. There are over 7800 acres of bottom lands above Afton and below the mountain toe supporting this type of vegetation and several square miles in which the growth of cottonwoods is more scattered. This causes large waste of water. It is estimated that the stream discharge is disposed of as shown in Table 3. This estimate is extremely tentative. However, all not beneficially used is wasted so far as economic benefit is concerned, so that from that standpoint there is little difference whether the waste occurs in floods past Afton or by supporting cottonwoods.

Table 3

Approximate Average Disposal of Water of Mojave River 29 year period 1905-06 to 1933-34

Tuilom					
River	90,000				
Springs	7,000			97,000	
Disposal					
Beneficial Consumption					
Irrigation	15,400				
Domestic and Industrial	1,100	16,500			
Non-beneficial consumption in		20,200			
sustaining native vegetation		41,000	57,500		
9			.,		
Surface outflow at Afton,					
(required to balarce equation)	\		39,500	97,000	
(10quilla to bala ce equation,			05,500	37,000	

The foregoing indicates that in addition to the 41,000 acre feet non-beneficial consumption, there was waste of water past Afton and out of the area of the valley in which development is possible, but as consumptive use is fairly constant from year to year, during the deficient periods shown in Table 2 approximately the same consumption as above would occur am the surface outflow would be negligible. Although expressed as an

the control of the co

S some

STATE OF STATE OF STATE OF STATE OF

average it occurs only in the years of fairly high runoff. Since and including the year 1927-28, during which seven year period some records are available of the flow past Afton, it is estimated that in only 1931-32 was there any flood waste past Afton, and of that, only about 6000 acre feet were from the mountain headwaters.

In the thirteen year period since and including 1916-17, there was only one year, 1921-22, in which it is probable that any large amount of flood water passed Afton and only eight in the 29 year period since and including 1905-06. In 1926-27 there was a flood peak past Afton but the amount of waste must have been small compared to that of the eight years noted.

The estimated beneficial consumptive use is only 16,500 acre feet and all else is wasted whether by native vegetation or by discharge past Afton. It is evident that if the present non-economic draft on the river for native vegetation is to be maintained, which would mean that only the flood wastes past Afton could be salvaged by surface reservoirs, there would be practically no water available for further irrigation in the deficient periods shown in Table 2 and supplies must come from flood waste held over in reservoirs from the periods of excess flow with consequent heavy loss by evaporation.

Surface Reservoirs

Reservoir sites which would have been surveyed are shown in Table 4 and locations are shown on Key Map.

Table 4

Surveyed Reservoir Sites Mojave River

Name of Reservoir	Elevation Water surface above streambed	Capacity Acre Feet
Victor	140	350,000
Forks West Fork No. 2)	160 130	113,459 34,000
West Fork No. 3) alternates	135	35,000
Arrowhead* Deep Creek	160 150	60,179 2,000
Grass Valley	90	7,600
Holcomb Creek	70	1,000

^{*}Partially constructed.

Underground Reservoirs

Where the water table is not at the surface the stream percolates into its bed to appear as rising water lower down regulated by the underground reservoir. Water from the stream also flows northward under Hinkley Valley to the west of Barstow. All along the stream from the mountains to Forks-of-the Road Fault east of Barstow, the stream channel and bottom lands are of sand and gravel and receptive of water. This is true also eastward of the Fault. If the water table were lower than it now is, greater percolation opportunity would exist, thus making available more of the flood flows which now waste past Afton in periods of excess flow, and if lowered sufficiently the native vegetation would die, thus releasing for beneficial use the water which is now used in keeping it alive.

Many thousand acres of unused land over: the basins, the underground water of which is supplied by percolation from the river. Good wells are readily secured in a great deal of the area and pumping lifts are not great. Development by individual effort, as has been common in many valleys in California, would lower the water table and automatically bring about the results noted in the preceding paragraph.

STORY OF STREET

Juliani.		
12 1:	011	The law.
	011	100-2111 No. 2 201 112
	201	
COL.	09	

July burn to be a LLA bearing

Engree of the contract

Estimates of capacity of the underground basins above Hodge are shown in Table 5 for various depths below ground surface.

Table 5

Estimated Capacity of Underground Basins above Barstow

Acre Feet

		Feet below	ground surface	e
	50	100	150	200
Forks to Victorville Victorville to Hodge Hodge to Barstow, including	90,000	220,000	410,000 480,000	670,000 640,000
Hinkley Valley	290,000	590,000 1,130,000	900,000 1,790,000	1,200,000 2,510,000

It is apparent that any extensive development of the water resources of Mojave Basin must contemplate utilization of underground reservoirs, perhaps supplemented by a surface reservoir. The present regimen of the stream would be much disturbed by such development if it is large.

the state of the s

in the second of the second of

CHAPTER II

DESCRIPTION OF MOJAVE RIVER VALLEY

Mojave River Basin is in the desert region of southeastern California most of which is part of the Great Basin. It is in the western part of San Bernardino County and its mountain drainage area divides the desert from the Coastal Region.

Principal towns are Barstow (population 2455 in 1929), Victor-ville (population 2165 in 1929) and Yermo (population 400 in 1929). Other small settlements are Hinkley, Newberry and Hesperia.

Industrial development consists of the railroad yards at Barstow which is a division point on the Santa Fe railroad and the cement works near Victorville.

Transportation is furnished by the main line of the Union Pacific from Salt Lake to Los Angeles, and of the Santa Fe from Kansas City to Los Angeles and to San Francisco, the division of traffic being made at Barstow. U. S. Highway No. 66 (also State highway) from Los Angeles to Salt Lake and from Los Angeles to norther. Arizona points also passes through the valley from end to end branching at Barstow. The valley is a natural avenue from the east to Coastal Region of southern California and to the Great Central Valley of the State, the first record of its use being about 160 years ago.

Irrigation is supposed to have begun prior to 1870 by means of a few small ditches diverting at points of rising water. The Appleton Land & Water Company, organized in 1885, diverted water from East Fork to lands around Hesperia. At one time about 1000 acres are said to have been irrigated but the total in 1916 was 310 acres and was less in 1929. The Mojave Water & Power Company in 1908 proposed a reservoir to be formed by a dam at Upper Narrows for irrigation below Victorville, but nothing came of it.

The state of the s

Trivatigns from an interest (purchased to 1979), The comsolid (prophetics from 1970) and from (application on 1970). -Oracle
solid askillanders are things of the property and things then

The second secon

Rancho Verde, just above the Upper Narrows, at one time is said to have irrigated 1500 acres. The area was reduced to 1000 acres in 1918. The Daggett Ditch was started in 1885 and after various vicissitudes is said to now irrigate 150 to 250 acres. Yermo Mutual Water Company was initiated in 1910 to irrigate 8000 acres near Yermo. About \$200,000 was spent it is claimed. In 1916 about 200 acres are said to have been irrigated from this system but in 1929 there was none. Victor Valley Irrigation District was formed in 1917 to irrigate lands in the mesa southwest of Victorville. While not formally dissolved it is absolutely quiescent. Mojave River Irrigation District was formed in 1917 to irrigate lands in what is called Apple Valley in the mesa southeast of Victorville but has done nothing.

The areas irrigated other than those just described are by individual enterprises such as the gravity diversions below Victorville or wells particularly in Hinkley Valley and Apple Valley.

In 1918 there were 9870 acres irrigated in the Mojave River Valley*, of which 7685 acres were in the river bottom and low lands and 2185 acres on the mesas. In 1929 there were 6019 acres (Plates 5-A, B and C in pocket), drawing water from the river either by gravity diversion and pumping along the river bottoms or by pumping in Hinkley Valley to which water from the river is conveyed underground. Above Victorville in Apple Valley and around Hesperia are additional irrigated lands not shown on map, which do not draw on river water but are supplied by tributary underground water or gravity diversions above the Forks. The irrigated area around Adelanto is also not shown but 101 acres irrigated by water from springs in the river bottoms are included in the above total. Table 6 shows the total irrigated area dependent on the river or underflow from it as disclosed by the aerial survey of 1929.

^{*}Op cit Bulletin 5.

Table 6

Irrigated Area in Mojave Valley dependent on Mojave River Acres - 1929

District	Acres
Mountains to Victorville Victorville to Hodge Hodge to Barstow, including Hinkley Valley Barstow to Daggett Daggett to Camp Cady	1,275 i,860 1,778 355 751
Total	6,019

Climate

Climate is very arid, annual precipitation averaging three to five inches with low humidity, high summer temperatures and great diurnal range in temperature. Sixty per cent of the precipitation occurs in the four months December to March. Growing period between frosts averages 245 days. High winds prevail in the spring.

Elevations average 3000 feet south of Victorville and below the Forks, 2500 feet between Victorville and Hinkley, 2150 feet between Hinkley and Earstow with a general fall from Earstow easterly of 13 feet to the mile. At Afton where the lowest gaging station for this investigation was established the elevation is about 1400.

AND THE PARTY OF T

		-III - I ALEMAN TO A STATE OF THE PARTY OF T
100	Acres .	

1.00 (1.00

THE RESIDENCE OF THE PROPERTY OF A STREET AND A STREET AN

CHAPTER III

SOIL SURVEY AND CLASSIFICATION

A cooperative survey of the Victorville area (that portion of the valley above Victorville) was made in 1921 by the U. S. Department of Agriculture and the University of California*.

In 1932 the University of California College of Agriculture, at the request of the Division of Water Resources and with funds for field work furnished by the Division, made a survey of the part of the valley influenced by Mojave River from Victorville down river to a line 18 miles east of Daggett. The results of this survey** are not yet published but part of the following is condensed therefrom.

The area covered by the two surveys within the boundary of the survey of the Division of water Resources is shown on Plates 4-A, B and C in pocket. The area covered by the survey of 1932 is entirely within the boundary of the Division of Water Resources survey but the area covered by the survey of 1921 extends outside that boundary. The boundaries of the three surveys are shown on Key Map. The University also classified the area encompassed by both surveys as to its suitability for agriculture by the "Storie Index Method of Soil Evaluation".

This soil rating takes into consideration three factors: (A)
Rating on basis of character of profile, i.e., mode of formation or accumulation and degree of weathering, (B) rating on basis of surface texture, i.e., loamy, sandy, gravelly, etc., and (C) rating of conditions and characteristics of the soil which modify its suitability for utilization

^{*} U. S. Department of Agriculture, 1921, "Soil Survey of Victorville Area", by A. E. Kocher and Stanley W. Cosby.

^{**} Soil Survey of Barstow Area, California, by R. Earl Storie and D. F. Trussell (in press).

III. GUTSET

CONTRACTOR STREET

control of the section of the sectio

in plant production, i.e. drainage, alkali, erosion, etc. Certain soils with low ratings might successfully produce certain special crops although not well suited to a wide range of crops. Climate and transportation, of course, are not taken into consideration in the rating but exert modifying influences.

Each factor is evaluated on a percentage basis, the ideal condition being 100. The percentage ratings of factors (A), (B) and (C) are then multiplied and the result is the "Soil Index Rating".

For California the soils have been divided into six grades as shown in Table 7.

Table 7

Agricultural Ratings of Soil Grades

Grade	Percentage Index	Agricultural Rating
1	80100	Excellent
2	60 80	Good
3	40- 60	Fair
4	20- 40	Poor
5	Less than 20	Very poor
6	Less than 10	Non arable

The total area covered by the two surveys is 409,145 acres. The classifications within the boundary of the Division of Water Resources survey are as follows:

Last Land	

Tante

Agricultural Value of Soils in Mojave River Valley covered by Survey of University of California, 1932 and U. S. Department of Agriculture cooperating with University of California in 1921.

	: :	soils in		of Alkali		:
District	:Grade:		S	: M :(moderate)	: A :(strong)	: Total
MOUNTAINS TO VICTORVILLE Both sides of river	: :	723: 39,162: 59,657:	0 0	; : 0 : 0	: 0: 0:	: 723 : 39,162 : 59,657
Total	: 4 : : 5 :	18,861: 13,450: 30,274: 162,127:	0 0 0	: 0	0 0	: 18,861 : 13,450 : 30,274 :162,127
VICTORVILLE TO BARSTOW Both sides of river Victorville to Hodge South side of river Hodge to Barstow Total	1 2 : 3 : 5 : 6 : 6	301: 3,139: 25,492: 9,315: 21,698: 3,033: 62,978:	687 1,744 16 0		0 : 0 : 0 : 0 : 1,226 : 0 : 1,226	301 5,506 26,570 11,574 22,940 3,033 69,924
HINKLEY VALLEY North side of river Hodge to Barstow Total	: 1 : 2 : 3 : 4 : 5 : 6 :	0: 4,475: 12,591: 193: 4,504: 0: 21,763:	3,448	0 116 0 2,470 0 2,586		: 0 : 5,812 : 16,039 : 3,913 : 4,504 : 0 : 30,268
BARSTOW TO EAST END OF SURVEY Both sides of river Barstow to Daggett North side of river Daggett to east end of survey Total	: 1	0: 37: 20,859: 2,327: 5,544: 0: 28,767:	0 1,253 345 0 0 0 1,598	0 0 424 212 0 0 0 636	0 0 0 0 1,545 0 1,545	0 : 1,290 : 21,628 : 2,539 : 7,089 : 0 : 32,546
DAGGETT TO EAST END OF SURVEY South side of river Total	1 : 2 : 3 : 4 : 5 : 6 : 6 :	0: 0: 37,515: 3,058: 9,485: 0: 50,058:	0 244 641 9,151 40 0		0 0 0 477 6,832 0 7,309	0 244 : 38,246 : 13,518 : 16,389 : 0 : 68,397
GRAND TOTAL		325,693		5,082		363,262

* Within the boundaries of the map in pocket.

THE RESERVE TO SERVE THE PERSON OF THE PARTY OF THE PARTY

			Second	0
0 4		7.5		
	0000	0	NO. 8	
	San State of			TO THE REAL PROPERTY OF THE PARTY OF T
	300.2	07.1		THE PART OF THE
- NT 1		704		The state of error
0		1 457		Tariffa o partir o company
:	 	: -		AND THE

Table 9

Agricultural Value of Soils in Mojave Basin

Summary of Table 8

Acres

Grade No.		Alkali Classification				Percentage
	Free	Slight	Moderate	Strong		
1	1,024	0	0	0	1,924	0.3
2	46,813	5,085	116	0	52,014	14.3
3	156,114	5,121	905	0	162,140	44.7
4	33,754	12,145	4,029	477	50, 405	13.8
5	54,681	56	32	9,603	64,372	17.7
6	33,307	0	0	0	33,307	9.2
Total	325, 693	22,407	5,082	10,080	363,262	100.0

Table 10

Agricultural Value of Soils in Mojave River Valley covered by Soil Survey of 1921 but outside of maps in pocket.

Grade No.	Area of Soils in Acres	Percentage
1	0	0
2	13,021	28.4
3	22,763	49.6
4	5,779	12.6
5	2,855	6.2
6	1,465	3.2
	45,883	100.0

As shown by Plates 4-A-B and C in pocket, the different classes of land do not occur in large areas but are scattered over the entire area mapped.

The names of soils included in each class are shown in Table 11.

9 0 1-12

other sough trabeling south her toothe

ELIMINAS.		SUDIES"		TOURS.	1005	₹, .\
100 100 100 100 100 100 100 100 100 100	100 E	2 2 20 20 20 20 20 2	200	Mary A	000, f 000, de 000, de f	10000
0.001		10,00	730,7		Y50,750	date

Off, while C

. The first of the

saturas.	BANKS AND ROOM	01_1-00
		1
1.85	(50,73	
6.00		2
6.62	1200	
518		
0,00%	100	

And the property of the property of the party of the part

will hadden by them is one shally than I bedute I at the be assess and

Table 11

Names and Descriptions of Soils in Different Gradings for Agricultural Suitability

Grade 1

Hanford very fine sand.

Grade 2

Foster fine sandy loam (slight alkali).
Cajon fine sandy loam (slight alkali).
Rosamond fine sandy loam (slight alkali).
Hesperia loamy fine sand.
Cajon loamy fine sand.
Hesperia loamy sand.
Hesperia coarse sandy loam.
Foster fine sand (slight alkali).
Foster silt loam.
Foster loamy sand (slight alkali).
Adelanto sandy loam, deep phase.

Grade 3

Rosamond silty clay loam (slight alkali).

Daggett loamy sand.
Cajon coarse sand, dark colored phase.
Mojave loam.
Cajon fine sandy loam (miderate alkali content).
Cajon fine sand (slight alkali).
Daggett gravelly sandy loam.
Hesperia sand.
Adelanto loamy sand.
Mojave sandy loam (slight alkali).
Yermo sandy clay loam, dune phase.
Yermo sandy clay loam (slight alkali).
Adelanto sand.
Adelanto sandy loam (slight alkali).

Grade 4

Rosamond silty clay loam (moderate alkali).

Mojave sand.

Yermo sandy clay loam, dune phase (alkali spotted).

Rosamond fine sandy loam (moderate alkali content).

Mojave sandy loam (moderate alkali content).

Yermo sandy clay loam (moderate alkali content).

Cajon coarse sand, loamy phase.

Adelanto sandy loam, heavy phase.

Daggett gravelly sandy loam, stony phase.

Sunrise sand.

Cajon coarse sand.

Cajon fine sand, dune phase (slight alkali).

Cajon fine sandy loam (high alkali content).

The second of th

SILVE

1000

مع سا

Grade 5

Troy stony sandy loam.

Rosamond fine sandy loam (high alkali content).

Adelanto loamy sand, rolling phase.

Adelanto sandy loam, rolling phase.

Adelanto sand, rolling phase.

Rosamond silty clay loam (high alkali content).

Mojave sand, caliche phase.

Sunrise sandy loam, rolling phase.

Sunrise sandy loam, eroded phase.

Yermo sandy clay loam (high alkali content).

Mojave sandy loam (high alkali content).

Mojave loam, playa phase.

Barstow and Daggett gravelly sandy loam.

Crade 6

Riverwash.
Playa deposits.
Dune sand.
Rough stony land.
Rough broken land.

CHAPTER IV

GEOLOGY OF MOJAVE RIVER VALLEY

A summary of the geological conditions pertinent to the hydrology of the Mojave River ground water basin is presented in the subsequent paragraphs. It has been compiled largely from the literature* of the district, although a portion of the information is based upon records obtained from a large number of wells located throughout the district and from observations made during a few days spent in the field.

The Mojave Basin forms that part of the Mojave Desert region which receives its ground water recharge wholly or in part from the Mojave River and its tributary streams. Its physiography is the typical arid type common to the desert region of the southwest, that is, broad alluvial plains, sloping away from irregular barren hills and mountains which rise from the plains precipitously as stubborn remnants of erosion.

The basin has been formed by the filling of the valleys traversed by the Mojave River with disintegrated rock debris washed down from the San Bernardino and other mountains that border the basin. A clue to the formation of the debris-filled valleys is given by the helter-skelter arrangement of the mountains which form their borders. With the exception of the San Bernardino Range, there is no linear alignment of the ridges so characteristic of the Great Basin. For this reason it is believed that in the main the alluvial valleys, which comprise the basin, owe their formation to normal erosional processes rather than to faulting. However, the

^{*} Previous reports of the geology of this area include U. S. Geological Survey Bulletin 541, pp. 141-154, 1914, "Reconnaissance of the Barstow-Kramer Region," by R. W. Pack; U. S. Geological Survey Bulletin 613, pp. 143-169, 1916, "Guidebook of the Western United States, Part C, The Santa Fe Route", by N. H. Darton; U. S. Geological Survey Water Supply Paper 578, 1929, "The Mojave Desert Region", by D. G. Thompson; California Univ. Dept. Geology Bulletin, Vol. 7, No. 24, pp. 443-464, 1914, "Pleistocene Beds at Manix, in the Eastern Mojave Desert Region", by J. P. Buwalda. All of these publications have been freely drawn upon.

great depths of fill that occur in certain parts of the basin can be satisfactorily explained only by the assumption of faulting or folding.

The geologic history of the Mojave River Basin is largely comjectural. There is some evidence, however, that it has been formed by the successive filling with debris and spilling over of the Mojave River into a number of smaller basins which now make up the entire Mojave River Basin. Thick, blue clay deposits which occur in the artesian area in the vicinity of Victorville and again over a very broad area above Afton indicate that the Mojave River has been impounded in these areas. It appears probable from the comparatively small amount of typical Mojave River deposits east of Daggett, that the present course of the river is of recent origin. Pressibly the river has been extended since Mid-Pleistocene time, due to increased precipitation in the headwater area, which accompanied uplift of the San Bernardino Mountains. That the Mojave River was larger in comparatively recent times than at present is made evident by the size of former Lake Manix which it supported in the region between Afton and Toomey in the lower Mojave River Valley. From the distribution of the lake beds which outcrop principally in the stream cut of the river between Harvard and Afton, Buwalda* estimated that the lake covered from 200 to 300 square miles, although well data collected by D. G. Thompson** suggest the lake to be somewhat smaller. The reduction in flow of the Mojave River which possibly followed the glacial period, indicates that the region has become more arid. A part of this reduction probably was effected by the loss of a portion of the headwaters drainage area of the Mojave River to Cajon Creek through stream piracy.

^{*} California Univ. Dept. Geology Bulletin, Vol. 7, No. 24, pp. 443-464, 1914, "Pleistocene Beds at Manix, in the Eastern Mojave Desert Region", by J. P. Buwalda.

^{**}U. S. Geological Survey Water Supply Paper 578, 1929, "The Mojave Desert Region", by D. G. Thompson.

Committee of the process of the proc

THE RESIDENCE OF THE PARTY OF T The state of the s NAME AND POST OF THE PARTY OF T the same and the same of the same and the sa and the first of most and the control of the contro the same of the part and done for a part of the sales of the AND RESIDENCE OF THE PARTY OF T THE RESERVE THE PARTY OF THE PA THE RESIDENCE OF THE PARTY AND ADDRESS OF THE PARTY ADDRESS for retain to be a party of the party of the later to the party of the later to the party of the and it was an a salar on a salar base of the salar and the at any or other contracts of the contract of t has been a branch branch and the me works on an appropriate property. where a first and the last terms are the first terms and the second and the second are the second and the second are the second as the second are the second at any or the property of all the public way that could be the state of the s the same of the sa THE R. P. LEWIS CO. P. LANSING MICH. LANSING MICH. P. LANSING. MICH. LANSING, MICH. 49-1403. THE RESERVE OF THE PARTY OF THE

A Terrandor and Association of the Control of the C

And the property of the proper

The rocks which form the walls and floor of the alluvial basin are of varied types. For convenience they may be divided into the two following groups: (1) a basement complex of pre-Tertiary age composed of more or less altered sedimentary and igneous rocks; (2) Tertiary lavas, tuffs and breccias associated with sands, gravels and clays of continental origin.

The pre-Tertiary rocks are composed of limestone, schist, quartzite, gneiss, volcanic rocks and various crystalline granitic rocks which
are in part older and in part intrusive into the sedimentary rocks. Nearly
all of the sedimentary rocks of this group are considered to be of Paleozoic
age, of which the larger part belongs to the Carboniferous Period. Due to
their great density, the rocks that comprise the basement complex are nearly
impervious to the movement of water. For this reason they may be ignored
as an important source of ground water supply for the area although small
seepages sufficient for domestic supply may locally be obtained from their
surficial joints.

Resting with marked unconformity upon a planated surface of the basement complex are volcanics and associated detrital beds of Tertiary age. The rocks of this group, which have an indeterminate thickness of several thousand feet, are distributed over the entire Mojave Desert region. Their outcrops in the Mojave River Basin are most conspicuous in the Barstow-Newberry area, where they form the many hills and ridges that rise abruptly to heights of several hundred feet above the plain. This group is composed largely of volcanic rocks of rhyolite, basalt, latite, andesite, tuff and breccia, which are interbedded with minor amounts of sandstone, conglomerate, shale and limestone. Tertiary rocks attributed to the Upper Miocene and Pliocene (?) periods outcrop along the San Bernardino mountain-front south of Hesperia, and probably occur beneath the Quaternary fill

AND DESCRIPTION AND ADDRESS OF PERSONS ASSESSED.

over much of the Upper Mojave River Valley. Here, they are composed largely of sands of continental origin, more or less cemented with residual clay, together with some shale.

Locally the Tertiary rocks have considerable water—yielding capacity, but in the main, they cannot be considered as an important source of ground water supply. This is due to their predominantly low porosity or fine grain, the limited recharge which they receive in their outcropping areas, and the large depths at which they occur in the valley areas. The Tertiary sands that form the mountain—front south of Hesperia and apparently much of the floor upon which the more recent fill was deposited, have a limited capacity to yield water. Their water—yielding ability has been greatly restricted by weathering which has caused them to be more or less cemented with residual clay formed in their pores. The Tertiary volcanics, although predominantly dense, may locally yield considerable water through their joints and other interstices. This is evidenced by a large spring** which apparently issues from volcanic tuff at the foot of Newberry Mountain.

The Quaternary fill is composed of detrital material of wide assortment, ranging from coarse boulder beds deposited along the steep mountain fronts to thick beds of sand and clay laid down upon flat or nearly flat surfaces. The depositional slope has been the dominant factor in the determination of the coarseness of material in any locality. In general, the upper two to three hundred feet of sediments, at least, have been deposited upon surface slopes not unlike those existing today. Alteration of the sediments through weathering has in many localities greatly restricted their water-yielding capacities. This condition is brought about where the fill has lain above the water table in the zone of oxidation for long

^{*} Noble, L. F., Excursion to the San Andreas Fault and Cajon Pass, Int. Geol. Congress Guidebook 15, Plate 3, 1932.

^{**}Darton, N.H., op. cit., p. 160.

property solds for the first production of all all products of the product of the

periods, prior to their deep burial. This is particularly common in areas of deep water table. As a result of these conditions the basin may be roughly divided into the following areas of similar water-yielding characteristics: (1) the channel of the Mojave River composed of unaltered sands and gravels, capable of yielding water in great quantity; (2) the areas of steep surface slope, largely covered by cones of small tributary streams composed of coarse rock debris, possessing low water-yielding ability, due both to their unassorted texture and to their alteration; (3) the broad alluvial flood plain areas of the Mojave River, containing unaltered, well-assorted sands and gravels of high water-yielding ability.

Neglecting the mountain headwater area the Mojave Basin is, by the nature of its confining boundaries, divisible in a broad manner into the following four parts, each of which can be subdivided further by peculiarities within itself: (1) the Upper Mojave Valley, a broad alluvial plain, extending from the San Bernardino Mountains northward to Victorville; (2) the Middle Mojave Valley, a narrow irregularly shaped alluvial plain, extending from Victorville to a point near Daggett; (3) the Lower Mojave Valley, a broad triangular shaped alluvial plain, having its vertex at a point near Daggett and its base at Cady Mountain; and (4) the region to the north and east of Cady Mountain, commonly known as the sink of the Mojave River, occupied by Cronise, Crucero and Soda Lake valleys, which was not studied in this investigation.

Upper Mojave Valley

The Upper Mojave Valley is a part of a broad piedmont plain that slopes away from the northern front of the San Gabriel and San Bernardino mountains, along which it abuts for a distance of about 100 miles. Its eastern and western limits are formed respectively by the apices of the

DURINE AL

cones built by Arrastre Creek (six miles east of the Forks of the Mojave River) and Sheep Creek, (21 miles west of the Forks of the Mojave River). Its southern border is formed by a series of protruding bedrock hills that produce a narrowing of the valley in the vicinity of Victorville and . Adelanto. The alluvial fill of the Upper Mojave Valley is apparently truncated on its south by a buried fault, designated here as the Ord Mountain Fault, along the northern toe of Ord Mountain and the front of the hills of Tertiary sandstone which occur north of Horsethief Canyon. Lying between the latter hills of Tertiary sandstone and Ord Mountain are dissected hills of alluvium, bounded on the south by the proposed Forks Reservoir Site and on the north by the above mentioned fault. These sediments have been formed by the outwash of the West Fork of the Mojave River and probably do not have great thickness south of the indicated Ord Mountain Fault. North of the fault and over the greater part of the Upper Mojave Valley the depth of the water-bearing series has not been clearly determined. The wildcat oil well of the Victor Valley Oil Company, Victor No. 1, located in the SE do of Section 20, T 5 N, R 5 W, S.B.B.&M., logged waterbearing sands and gravels from the surface to 730 feet; pink shale, brown sandy shale and hard sand from 730 feet to 1350 feet, excluding five feet of water gravel encountered at 1060 feet; and brown shale, lime and schist from 1355 to 1600 feet, total depth. A water well located in the SE# of Section 16, T 5 N, R 4 W, S.B.B.&M. reported water-bearing alluvial fill from the surface to 835 feet and hard granite from 835 to 861 feet, total depth. The wildcat well of the Hesperia Oil and Gas Company, No. 1, located in Section 29, T 4 N, R 4 W, S.B.B.&M., logged sand, gravel and gravelly clay from the surface to 885 feet; lime, talc, clay, hard sand and gravel from 885 feet to 1105 feet; hard sand, sandy shale, brown shale and lime from 1105 to 2941 feet; and limestone formation with streaks of fossil

and the second s All all the second as the second and second at the second and second as the state of the s The course of th - and the file of the court of the second property and the legislation party AND THE PROPERTY AND ADDRESS OF THE PARTY AND total year or a first total and the first tota Company of the Compan

shells from 2941 to 3033 feet, total depth. A water well located in Section 35, T 4 N, R 5 W, S.B.B.&M., and about two miles north of the San Bernardino Mountain-front, encountered the water table at a depth of approximately 750 feet, indicating that the bedrock near the mountain-front is quite deep. It is possible that the material logged largely as hard sand and shale in the Victor Valley Oil Company No. 1 well from 730 to 1350 feet and in the Hesperia Oil and Gas Company No. 1 well from 885 to 2941 feet, may be correlated with the Tertiary sandstone which forms the hills south of Hesperia, and that the rocks penetrated at greater depths are a part of the basement complex. This inference, together with the depth to bedrock in the water well situated in Section 16, T 5 N, R 4 W, S.B.B.&M., and the relatively deep bedrock indicated along the San Bernardino mountain-front would suggest that the Quaternary water-bearing series has been deposited upon a relatively flat surface of the nonwater-bearing series and that it is approximately 800 feet thick in the central part of the valley and somewhat thicker adjacent to the mountain-front along the upper part of the alluvial cones. At least, the pervious fill is approximately limited to these depths.

The Mojave River has entrenched itself in a deep channel, extending over the entire length of the upper valley. In the locality known as the Upper Narrows, near Victorville, it has cut a narrow V-shaped channel into the resistant granitic rocks which form a spur to the hills along the eastern boundary of the river. Above the Upper Narrows it has widened its trench in the non-resistant fill material to an average width of about one mile. Recent fill has been deposited in its newly cut channel to a depth of about 50 feet. This latter figure is based upon test holes bored by the U. S. Geological Survey* in the Upper Narrows.

^{*} U. S. Geological Survey, Water Supply Paper 140, 1905, "The Rate of Movement of Underground Waters", p. 56.

the second secon THE RESERVE OF THE PARTY OF THE The second secon the second section in the second section in the second section in the second

The material comprising the older Quaternary fill has been considerably altered through weathering and as a result, its specific yield has been greatly reduced. Based on a study of a few well logs and a comparison of the older fill to similar material in the South Coastal Basin, a specific yield of from five to ten per cent is estimated for this altered material. On a like basis a specific yield of from 15 to 20 per cent is estimated for the recent fill deposited in the channel of the Mojave River.

Middle Mojave Valley

tending from Victorville to a point near Daggett and is bordered by numerous hills whose steep alluvial aprons blend into a former flood plain of the Mojave River that stands considerably above the present stream channel. In this region the Mojave River is bordered by a recent flood plain, varying in width from a mile to a small fraction of a mile, which lies in the bottom of a trench cut into older deposits of the river. Nearly everywhere the bordering topographic features suggest that the bedrock lies at no great depth, although there are no available logs which give specific information. The regions of shallowest bedrock often manifest themselves by rising water in the channel.

Near Hodge the narrow valley of the Mojave River emerges downstream into a rather broad plain, possessing two outlets through which
both surface and underground drainage occur. One is occupied by a gap approximately two and one-half miles wide located to the north and east of
Hinkley, and the other is located in the eastern part of the valley and
through which the Mojave River continues on its course to Barstow. There
is possibly a third underground outlet to the sub-basin located to the west
of Hinkley, but the available water levels show no divergence of the water
table in this direction. The water table in Hinkley Valley slopes in a

which the property of the party of

selled you to children

THE RESIDENCE OF THE PARTY OF T

north and easterly direction, a portion of the ground water moving through each of the gaps mentioned. Its movement through the gap to the north and east of Hinkley is greatly restricted by a number of small protruding bedrock hills that crop out in the central portion of the narrows. The underflow through this gap joins the water table of Harpar Valley which is a deep structural (?) basin filled with water-bearing debris to a depth of at least 2000 feet. This latter depth is evidenced by the C. C. Hamilton wildcat oil well situated in the Northwest corner Section 11, T 10 N, R 5 W, S.B.B.&M., which reported sand, sandy clay, gravel and conglomerate carrying water to 2000 feet; and lime, shale, hard sandstone, boulders and brown shale to 2187 feet total depth.

Several bedrock prominences occur in the flood plain of the Mojave River in the Hinkley sub-basin, indicating the general shallow character of the fill material. East of the Hinkley sub-basin the Middle Mojave Valley continues again in a narrow confined valley to a point near Daggett where it has its debouchment upon the broad plain of the Lower Mojave Valley.

A blanket specific yield of 15 per cent has been assigned to the Mojave River deposits of this area. The value is based upon the general surficial appearance of the deposits and the consistently large capacity of the Wells that produce from them in the flood plain areas. This value is therefore subject to considerable revision with more detailed data.

Lower Mojave Valley

The Lower Mojave Valley is a broad triangular shaped flood plain formed by the Mojave River. By the nature of the movement of its ground water, it may be divided into two sub-basins, one occupying the region to the west of the inferred Forks-of-the Road Fault which traverses the valley in a northwesterly direction from Newberry (see Plate 5-C and Key

Map), and the other occupying the territory to the east of the fault.

Along this common boundary line the underground movement of the water has been greatly restricted; an abrupt drop in the water table of from 25 to 40 feet occurs in a downstream direction at the fault. Considerable sedimentary clay, which has produced an artesian pressure area, has been deposited for a distance of about one and one-half miles above the barrier, indicating that the Mojave River has probably been impounded from time to time as displacement occurred along the fault. All vestiges of the fault in the flood plain area, such as escarpments, have been either erased by erosion or buried by later debris. A direct effect of the fault is the high water table which has encouraged the growth of much water loving vegetation, which has in turn given foothold to numerous sand dunes that cover a large part of the area above the barrier.

The river has entrenched itself into a rather narrow channel which becomes progressively deeper downstream from the upper part of the Lower Mojave Valley. Near Daggett its walls are 15 to 25 feet high, while a short distance below Harvard they rise about 75 feet above the channel. This trenching has resulted from a lowering of the local base level in the eastern end of the valley where the river has cut a rather narrow gorge into resistant bedrock.

The water table of the Lower Mojave Valley slopes in an easterly direction and more or less follows the general inclination of the plains. Ground water "spills" over the high bedrock present in the lower part of the Middle Mojave Valley into the deeper fill of the Lower Mojave Valley at a point about two miles west of Daggett where the water table stands at a depth of approximately 40 feet below the river bed. Beyond this point the water table gradually approaches the surface of the more steeply sloping stream channel toward the Forks-of-the-Road Fault, where it abruptly drops

to depths of from 25 to 40 feet. From here it again gradually approaches the stream level in a downstream direction as the bedrock becomes shallower.

The thickness of the water-bearing materials has not been determined over the greater part of the Lower Mojave Valley. According to Thompson*, a number of Wells located in the upper part of the valley have penetrated nearly 500 feet of water-bearing materials without reaching bedrock. A small remnant of lava rises above the plain about two miles northwest of Newberry. This bedrock protrusion, which is possibly related to the Forks-of-the-Road Fault, suggests an irregular bedrock floor. Bedrock also rises to the surface at the lower end of the valley in the stream cut of the Mojave River.

An analysis of well logs included in the U. S. Geological Survey Water Supply Paper 578 gives for the top 175 feet of material in the upper sub-basin: gravel 40 per cent, sand 24 per cent, and clay 36 per cent.

Assuming a specific yield of 18 per cent for the average gravel of this locality (maximum ten per cent grade size** of 32 mm.), 22 per cent for sand, which allows for a relatively large per cent of fine material, and 1 per cent for the clayey material, an average specific yield of 13 per cent is indicated. A similar classification of the logs of the lower sub-basin gives: gravel 5 per cent, sand 46 per cent, and clay 49 per cent. Using the same specific yield values as assumed for the individual groups of material for the upper sub-basin, a specific yield of 11 per cent is indicated for the lower area.

These analyses bring out a striking increase in both the sand and clay content in the lower sub-basin at the expense of the gravel,

^{*} Thompson, D. G., op. cit., p. 449.

^{**}California State Division of Water Resources, Bulletin 45, "Geology and Ground Water Storage Capacity of Valley Fill", by Rollin Eckis, Plate XI.

Annual at the second section of the second section of the second section section section sections.

A STATE OF THE PARTY OF THE PAR

which decreases from 40 per cent in the upper area to 5 per cent in the lower area. A large part of the clay beds in the lower sub-basin, no doubt, occur in thick confining blankets, and therefore would be only partially drained by a lowering of the water table.

CHAPTER V

MOUNTAIN HEADWATERS

The headwaters of Mojave River cover 217 square miles and drain practically all of the north slope of San Pernardino Mountains, which rise to general heights of 8000 feet at the summit and slope downward to an elevation of about 3000 feet at their toe. The drainage area is forested in its higher elevations and much of the precipitation occurs as snow. The headwaters comprise two major branches, West Fork, 75 square miles, and East Fork (Deep Creek), 137 square miles above stream gaging stations which unite head on just above the plain at the Forks and form the Mojave River.

Due to the activities of the Arrowhead Corporation, data on rainfall and runoff are unusually numerous in the headwaters of Mojave River and it is possible to estimate the discharge of the tributaries at numerous points with considerable accuracy. In addition, the Corporation located and surveyed several reservoir sites of apparent feasibility and constructed one now known as Lake Arrowhead. Through the courtesy of Mr. J. B. Van Nuys, these records were made available to the Division of Water Resources and have been used as the basis for all estimates of discharge at various points incorporated herein.

Arrowhead Project

"The predecessor of the present Arrowhead Reservoir and Power Company was the Arrowhead Reservoir Company, organized in 1891, the principal stockholders being Cincinnati capitalists. The original plan was a colossal undertaking. It was proposed to construct a main reservoir in Little Bear Valley which would impound the natural drainage of Little Bear Creek, a tributary of Deep Creek. An inlet tunnel, now partly constructed,

THE R. P. LEWIS CO., LANSING, MICH.

was to be made from the reservoir eastward to Deep Creek and extended from this stream to Crab and Holcomb creeks to collect all drainage above the tunnel and carry it into the reservoir. Diversion dams and regulating reservoirs were to be located at Deep, Crab and Holcomb creeks and the flow of the smaller streams was to enter the tunnel through shafts. All of these works would be in the Deep Creek Watershed. Another reservoir was to be constructed in Grass Valley, westward of the main reservoir and on a tributary of the West Fork of the Mojave River, and this supplemental basin was to be connected with the main basin by a tunnel. Two other reservoirs were to be located in mountain flats, the sites for which were later abandoned. Water was to be taken from the main reservoir by an outlet tunnel through the San Bernardino Range and delivered for the irrigation of lands south of the mountains. The company had no lands for sale and made no contracts for the delivery of water.

Bear Creek, but by the time the foundation was constructed it was found that suitable rock in sufficient quantity to construct a masonry dam was not to be had near the site. This caused a suspension of construction which was prolonged for a number of years. Data on the amount of water for storage had been meagre and the supply had been overestimated. In 1892 a series of precipitation and runoff measurements was begun throughout the watershed which was continued for 13 years before construction was resumed.

"Until 1895 the development of power had not been considered in connection with the project. About that time, when it became known that long transmission of electrical power was practicable, it was planned to utilize the energy of the water in its descent on the southern slope of the mountains.

"In 1905 the property was transferred to a new corporation, the Arrowhead Reservoir and Power Company, capitalized at \$6,500,000 with nonassessable stock of which \$500,000 was 5 per cent preferred and the remainder common stock. Shares representing about \$600,000 par value were issued and placed in the hands of a trustee, no payments having been made on these shares. Some of the stockholders have taken notes of the company for other obligations, but the company has no indebtedness outside of the stockholders.

"The type of dam for the Arrowhead site was changed to a semihydraulic fill with concrete core. The plan of outlet works was also
modified. The Burcham Ranch, now called Rancho Las Flores, containing
5,240 acres and including the Forks reservoir site on the West Fork of
Mojave River near the Forks, also two dam sites farther upstream on the
West Fork and known as the West Fork sites numbers 2 and 3, were acquired.

It was proposed to convey the water in Little Bear Valley reservoir to the
Forks reservoir, using the intervening drop for power development. The
water would be combined in the Forks reservoir with that received from the
natural drainage of the West Fork. This lower reservoir was then to be
drained by a tunnel through the mountain range to the south side, where
another power drop would be located and below which the water would, as
under the former plan, be delivered for irrigation in San Bernardino Valley.

"About 1909 some of the owners of riparian lands on Mojave River, including the Hesperia Land and Water Company, filed suits to prevent the company diverting water from the watershed, but the cases have not been brought to trial. In 1912 application was made to the California Railroad Commission for permission to issue \$4,000,000 in bonds when riparian land owners again opposed the plans of the company by protesting against the

granting of the application. The application was denied, without prejudice, for the stated reason that the company's title to water was uncertain until the cases were decided by the courts. The record of the hearings conducted by the commission on the application shows the following:

Valuation put on property at time of reorganization Spent by new company since reorganization Principal owed by new company Interest owed by new company	923, 204 793, 796
Total	\$3,034,589

"About this time the company, or a trustee of some of the stock-holders, began to purchase riparian lands on Mojave River mainly for the purpose of quieting opposition from adverse water right claimants, and 1000 acres just below the Forks and 3200 acres, together with most of the older and more useful ditches between Victorville and Earstow, were acquired. This property included the Westwater lands below Victorville.

"It had been the intention to purchase more riparian lands, but owing to the decision of the State Supreme Court about this time to the effect that flood waters of a stream could not legally be diverted from the natural drainage basin,* a radical change in plan was adopted which made this no longer necessary. It was now decided to use the water for the development of power and irrigation on the north side instead of the south side of the mountains. In 1914 an offer, which was not accepted, was made to the city of San Diego to sell the water from the system, the diversion from the watershed for domestic use not being illegal.

"In addition to agricultural lands below the Forks, the company holds about 12,000 acres in the mountains, mainly in the Little Bear Valley, Grass Valley and Forks reservoir basins. The company claims riparian rights appertaining to the extensive lands above and below the Forks,

^{*}Miller & Lux vs. Madera Canal and Irrigation Company, 155 Cal. 60.

CONTRACTOR OF THE PARTY OF THE

The same of the sa

also appropriation rights on all streams above the Little Bear Valley reservoir inlet dating from 1890 and on the West Fork and Deep Creek dating from 1905."*

In 1923 the property was acquired by the Arrowhead Corporation, in whose name it still stands. Efforts to continue the plan have been abandoned by the Corporation. The reservoir forms a beautiful mountain lake. A resort of considerable fame has been established with the lake as a nucleus. Much of the land bordering or near the lake has been subdivided and sold.

The following construction has been completed:

Thirteen thousand feet of a concrete-lined tunnel 6' x 7' in section from Deep Creek to Arrowhead Lake. There remains 5370 feet unbored.

A 4' x 6' concrete-lined tunnel 5102 feet long from the gate tower at Lake Arrowhead to Willow Creek.

A similar tunnel as part of the outlet system, 2500 feet long. Bore completed but not lined.

A 5' x 7' concrete-lined tunnel 2800 feet long from Grass Valley to Arrowhead Lake.

Arrowhead Dam, a semi-hydraulic fill with concrete core, to a height of 200 feet above streambed. As projected it was to be 27 feet higher. Present capacity of reservoir is 54,000 acre feet. The projected capacity is 61,000 acre feet. Outlet works are complete.

No work has been done on the remaining features of the project.

Precipitation

Monthly and annual precipitation records are given in Appendix 1, Table 39, and locations of stations are shown on Plate 2. From the records the 50 year average rainfall beginning 1883-84 at the

^{*} Excerpt from State Department of Engineering Bulletin No. 5, "Report on the Utilization of Mojave River for Irrigation in Victor Valley, California, 1918".

and the form of the sales and

and the second s

THE RESERVE AND ADDRESS OF THE PARTY OF THE

and the second of the second o

and the latest the same of the

THE COURSE OF THE CASE OF THE COURSE OF THE

A TANKS OF THE PARTY OF THE PAR

SHIPPING THE

The state of the s

several stations where the record is more than 10 years in length, is estimated to be as follows:

Table 12

Principal Precipitation Stations

Maintained by Arrowhead Corporation and others
in and near Mountain Headwaters of Mojave River

Station	Elevation above sea level	Length of record years	Estimated 50 year mean inches
Ash Meadows	4650	10	23.75
Big Bear Lake Dam*	6800	50	38.27
Deep Creek	5200	17	34.58
Forks of Mojave	3000	16	13.17
Gate House in Little Bear Valley	5100	33	36.40
Grass Valley at Saw Mill	5190	12	41.37
Hesperia**	3190	10	8.18
Holcomb Creek	5250	16	24.46
Morse's	5350	21	58.07
Squirrel Inn	5280	29	46.31
Victorville	2716	15	5.21

^{*} In headwaters Santa Ana River.

Stream Discharge

The discharge records at the various gaging stations maintained by the Arrowhead Corporation have been used to estimate the average runoff for the 29 year period beginning 1905-06. Where the record is more than 10 years in length these estimates are shown in Table 13 and the locations of gaging stations are shown on Plate 2.

^{**}In Mojave River Valley.

per china de como del como de como de

St state

SEA - Set All man 7 seconds of the belief

A-1-112	10-1	letters.	mHM1

¹¹⁰

A LOW PARTY STREET, SPECIAL PROPERTY AND PRO



Table 13

Stream Gaging Stations Maintained by
Arrowhead Corporation and U. S. Geological Survey
in Mountain Headwaters of Mojave River

	Elevation	Length of record	Estimated annual mean discharge
	above	complete	for 29 year period
Station	sea level	seasons	beginning 1905-06
		-	
Buck Creek above junction			
Crab Creek	5650	1	
Cedar Creek	5300	2	
Cox's Creek	5200	2	
Crab Creek above junction			
Buck Creek	5750	3	
Crab Creek below junction			
Buch Check	5200	14	2,600
Deep Creek below Green			
Valley Creek	5350	17	15,700
Dry Creek	5500	3	
East Fork Mojave River	3000	20	57,000
Fern Creek	5350	2	
Grass Valiey Creek	5100	16	2,600
Guernsey Creek	5150	S	
Holcomb Creek	5250	17	8,000
Hook's Creek	4950	3	
Huston Flat Greek	4400	3	
Little Bear Creck	4950	13	8,400
Mill Creeh	5000	0	
Midway Creek	5100	2	
Mojave River below Forks	3000	19	90,300
Pine Creek	5250	2	
Rock Camp Creek	4900	3	
Rocky Gulch	4900	3	
Saddle Creek	4900	1	
Shake Creek	5400	S	
Sheep Creek	5200	2	
West Fork Mojave River	3000	19	33,300

The monthly and seasonal discharge records are shown in Appendix 1, Table 40.

The percentage of the mean annual discharge occurring each season, and the percentage of each season's flow occurring each month at the gaging stations, on East Fork of Mojave River and on West Fork of Mojave River shown on Key Map, are given in Appendix 1, Table 41.

-last

The second second second second second

State State of	-		
George Spring St. com			
	•		
			1 400 1001
			2011/100
			A1
<	91		
			- 110
			-201 000
•			
			THE PARTY AND
			7-7-9-00
			11000
	<u> </u>		
		- 9	TO SHOW
			6/1
			3 -0-2
			100

the second second second second

ADD DESIGNATION

Reservoir Sites*

All possible reservoirs on the Mojave River except that immediately above Victorville are in the mountain headwaters. Their locations are shown on Key Map and on Map 5A in pocket. Descriptions follow, including the Victor site for convenience although it is not in the headwaters.

<u>Victor Reservoir Site</u> The dam site is in solid granite. It was drilled in 1899 by the U. S. Geological Survey.** Maximum depth to bedrock is 46 feet. The gorge is 140 feet wide at streambed and at 145 feet above the stream is 350 feet wide. A considerable portion of the site is moist land caused by the rising water from the Victor Basin. Of the area beneath the highest flow line 760 acres were in crop in 1929. A little over two miles of the main line of the Santa Fe railroad passes through the lower end.

Table 14
Victor Reservoir Site Capacity Table

Elevation water surface above streambed Feet	Area <u>Acres</u>	Capacity Acre Feet
80		75,000
100		134,000
120		218,000
130	5,800	271,000
140		350,000

Water supply available to the reservoir is shown in Table 2.

<u>Forks Reservoir Site</u> This is situated on West Fork just above the Forks.

The site lies along the contact of the valley alluvium with the granites

^{*}From Bulletin 5 previously cited.

^{**}Eighteenth and Twenty-first Annual Reports of the United States Geological Survey.

وَ ازْ مَا رَحَالُ وَكُا

William Company of the Property of the Park

1-1-0		
0.00 A	raya	001 001 013 013 014

- ANAC of word of places of a side of the place and at

The state of the s

HOLDER OF THE PARTY OF THE PART

of the mountains. The stream has cut its way through a spur from the mountains and this forms the dam site. A conduit from East Fork would divert a part of its waters to the reservoir site. Exploration at the site was done by the Arrowhead Company, which sunk a test hole and shaft and report bedrock at this point to be 18 feet below the surface.* The site is narrow and for it a constant angle arch concrete dam has been designed.**

Table 15

Forks Reservoir Site
Area and Capacity Table

Elevation		
above streambed	Area	Capacity
Feet	Acres	Acra Feet
0	1	0
20	25	113
40	155	1,894
60	289	6,372
80	466	13,882
100	751	25,710
120	1149	44,378
140	1707	72,492
160	2387	113,459

Average estimated discharges of East and West Forks are shown for various periods in Tables 16 and 17.

Table 16

Estimated Discharge of East Fork of Mojave River

Period	Number of years	Average annual Acre Feet	Per cent of 29 year average
1905-06 to 1933-34	29	57,000	100
1895-96 to 1904-05	10	25,000	44
1922-23 to 1933-34	12	28,800	51

^{*} Bulletin No. 5, Department of Engineering, State of California, "Utilization of Mojave River for Irrigation of Victor Valley, California", 1918, by Mojave River Commission.

** "Irrigation System for the Mojave River Irrigation District", 1923. Unpublished report by J. B. Lippincott.

J-1		and the same
1331		165
	6162	
	7.20	
100		
	0000	1011

THE RESERVE THE PERSON NAMED IN COLUMN TWO ISSUES ASSESSED.

AND THE PERSON NAMED IN THE PERSON OF

53 Library

the St. of Lot of St. of Lots

Demonia	1	DESCRIPTION OF THE PERSON OF T	1215
- H		M. 22 21	

The state of the s

the property of the party and the party of t

Estimated Discharge of West Fork of Mojave River

Table 17

Period	Number of years	Average Annual Acre Feet	Per cent of 29 year average
1905-06 to 1933-34	29	33,500	100
1895-96 to 1904-05	10	17,000	51
1922-23 to 1933-34	12	17,500	52

The Mojave plain slopes northward away from the dam site and the rim is only 100 feet above the stream channel at a saddle northeast of the dam site, necessitating an auxiliary embankment if water surface in the reservoir should be raised above that elevation.

From the saddle the terrain drops 120 feet in about 600 feet to Mojave River bottoms. The question of percolation through this alluvial ridge was considered by a board of engineers* which concluded as follows:

"The results of field examinations, laboratory tests, and theoretical computations of the probable ground water flow through the saddle on the northern rim of the West Fork Reservoir site, lead to the conclusion that it is a satisfactory foundation upon which to construct an earthen fill dam to impound water to an elevation of 3140 feet as proposed by your engineers.

"There will be a large rate of absorption through the sides and bed of the reservoir during the early period of its use, which probably will diminish from year to year, as the reservoir becomes silted up and as the ground water levels assume flatter gradients. Fortunately, the years of greater loss by absorption will be those of relatively smaller demand. We do not believe that the permanent loss by absorption will be sufficient to materially impair the value of the reservoir site."

West Fork Reservoir Site No. 2 This was surveyed by the Mojave River Commission and a geological report was made but no exploration of the dam site was done. The dam site is in good granite. The cross section shows

^{* &}quot;Permeability of the Northern Bank of the West Fork Reservoir Site", 1923, by J. A. Quinton, Charles Bradshaw and J. B. Lippincott. Unpublished Report.

SHIP OF REAL PROPERTY.

TO THE ST.	Line and	Mark In	1.03
			DESCRIPTION OF PERSONS
			-0-00 or sp-0041
,			THE-OTHER ALL RE-TREES

The second of th

a width of about 600 feet at streambed and 990 feet at 130 feet above streambed.

Table 18

West Fork Reservoir Site No. 2

Area and Capacity Table

Elevation of water surface above streambed Feet	Area <u>Acres</u>	Capacity Acre Feet
0	0	0
5	20	100
25	70	800
45	150	3,300
65	245	8,300
85	340	15,000
10 5	420	22,800
125	495	30,800
130	520	34,000

Average estimated discharge at the site for different periods is shown in Table 19.

Table 19

Estimated Discharge
at West Fork Reservoir Site No. 2

Period	Number of years	Average annual Acre Feet
1905-06 to 1933-34	29	24,300
1895-96 to 1904-05	10	12,400
1922-23 to 1933-34	12	12,700

West Fork Reservoir Site No. 3 This was also surveyed by the Commission. No exploration work was done at the dam site but it is in good granite. The cross section of the site shows a width of about 750 feet at the bottom and 1075 feet at 130 feet above bottom.

where you to be a few to be a superior of the last the party of the last the party of the last the las

Land of the land of the land

61.00	
	100
,	
,	TOTAL COLUMN
907,24	
2007/4	158

all the transfer of the second of the second

.D. miles 44 -- m m

01

7-116-1174	10 10 0 10 10 0	/4-1
		SAME OF THE PARTY
307	811	10000 00000

Table 20
West Fork Reservoir Site No. 3
Area and Capacity Table

Elevation of water surface above streambed Feet	Area <u>Acres</u>	Capacity Acre Feet
0	0	0
5	5	40
25	40	700
45	90	2,800
65	150	6,100
85	220	12,000
105	290	19,800
125	375	30,000
135	430	35,000

Average estimated discharge for various periods is shown in Table 21.

Table 21

Estimated Discharge at West Fork Reservoir Site No. 3

Period	Number of Years	Average annual Acre Feet
1905-06 to 1933-34	29	23,200
1895-96 to 1904-05	10	11,800
1922-23 to 1933-34	12	12,200

Deep Creek Reservoir Site Dam proposed by Arrowhead Corporation was to be 150 feet high above streambed, giving 2000 acre feet of storage. It was proposed as part of the diversion system from creeks east of Arrowhead Lake to the Lake.

Grass Valley Reservoir Site Dam proposed by Arrowhead Corporation was to be 90 feet high above streambed, giving 7600 acre feet of storage. It was proposed as a regulator of Grass Valley Creek west of Lake Arrowhead to which it would be diverted.

Se desired to the

		March Street, Street, St. Street, St. Street, St. Street, St. Street, St.
	ž.	
300		
000 III		
4		

** 1 ** - 1 ** - 1 ** - 1 ** ** ** ** ** ** ** ** ** ** ** **

13 -000

AR LEGAT

A THE PROPERTY OF THE PARTY OF

5335		
20 M	3.	IN-SECTION NAMED IN-SEC

Holcomb Croek Reservoir Site Dam proposed by Arrowhead Corporation was to be 70 feet high above streambed, giving 1000 acre feet of storage. It was proposed to divort Holcomb Creek to Lake Arrowhead.

Evacoration

Records obtained by Arrowhead Corporation at Lake Arrowhead give annual evaporation shown in Table 22.

The record is from a three foot pan floated in a concrete basin and surrounded by one foot of water. Measurements were made at 6 A.M. and 6 P.M. in summer and 9 A.M. in winter.

Table 22

Evaporation at Lake Arrowhead October to September, inc.

	Evaporation
Year	Inches
1895-96	35.01
1896-97	39.99*
1899-1900	43.80

^{*} March estimated to be 1.0 inch.

-05

The same and the s

and the last

THE RESERVE OF THE PROPERTY OF

8 ...

0.0000000000000000000000000000000000000	160
C.S.	10-11-0
90.04	The second
All the said	201-

Service of the servic

CHAPTER VI

HYDROLOGY

Immediately below the Forks the stream debouches onto the plain which is formed by the broad outwash slopes of the mountains and is quite regular in its topography. In this it has entrenched itself and flows for about 14 miles in a broad sandy wash through bottom lands from one to two miles wide, cut about 100 feet below the plain. In the direction of flow the general slope approximates 20 feet to the mile.

Below the Forks the course of the stream is north about 30 miles, then northeastward 20 miles, then eastward 55 miles to Soda Lake, and finally northward 15 miles to Silver Lake. Surface contributions are negligible below the Forks but some underflow can be detected, principally from the west side, reaching the stream below the town of Victorville.

Below Barstow there is possibly a negligible underflow from the south.

Below Baxter, a station on the Union Pacific Railroad, there is a broad debris cone which is very absorptive. The stream flow at this point, which occurs only during very infrequent floods, wanders over this debris cone on which it splits into two diverging channels, one channel carrying water northerly into East or Upper Cronese Valley where a lake has been formed and at the northerly end of which overflow through a low gap would carry the water to another basin known as West or Lower Cronese Valley. The other channel carries the water easterly onto Soda Lake, a broad alkali flat which offers no surface storage, but over which the flood flow spreads for a considerable area, saturating the soil from which it later evaporates. At the later end of Soda Lake the remaining flow regathers and passes through a low narrow gap into Silver Lake, which at present is the extreme end of the Mojave River stream flow. There is direct evidence that Silver Lake has overflowed during recent times, in which

39-77

case the water would reach the Amargosa River near Salt Spring and thence by this channel reach the Salt Pools in the bottom of Death Valley.

Although there are small contributions by underflow possibly as far east as Harvard, a station on the Union Pacific, the stream begins to lose water as soon as it leaves the mountains by evaporation, percolation into the streambed in the reaches where the water table is far enough below the surface and transpiration from vegetation along its course, and only the larger floods find their way into the lakes mentioned above where the waters are finally evaporated.

At no place along the stream is the water table distant below the streambed, the greatest depths being about 40 feet five miles below the Forks and about 25 feet nine miles above Barstow during the period of this investigation. Along most of the course the water table is so close to the surface that a growth of cottonwoods is maintained and in some places tules, willows, etc. At frequent intervals along the bed a small surface stream is found where the underflow has been forced to the surface.

Fourteen miles below the Forks are the Upper Narrows, formed by a low granite ridge across the course of the river and through which the river has cut. Except for the underflow of about five-tenths* second foot all the water which has percolated above is here forced to the surface.

The surface flow due to rising water continues on past the Lower Marrows, which are three miles below the Upper Marrows, and through a broad canyon-like section for another 14 miles where it disappears into the broadening valley, but evidences of high water table continue for many miles.

In the 17 miles from Victorville north where rising water is found there is a considerable agricultural development both from gravity

^{*}U. S. Geological Survey Water Supply Paper 142, "Rate of Movement of Underground Waters", pp. 55-63, by W. S. Slichter.

and the part that you that a construct one that the set has

The second secon

diversions and pumping in the bottom lands because of ease in obtaining water. The same condition exists above Upper Narrows where a similar development exists. A series of springs enters the river from the west between the Upper and Lower Narrows. This water is believed to come from the waters of the small streams to the west as far as Sheep Creek which have percolated into the plain.*

Below Barstow, as shown by Plate 5-C in pocket, the underflow appears on the surface at three different places, and throughout the entire length until Baxter is reached a growth of trees along the river's course is maintained.

Stream Gaging Stations

In addition to those in the mountain headwaters maintained by the Arrowhead Corporation, the following permanent stations have been maintained in the valley:

East Fork at Mouth

Lake Arrowhead Corporation: Dec., 1904 to Sept., 1922, inc. U. S. Geological Survey: Jan., 1930 to Sept., 1934, inc.

West Fork at Mouth

Lake Arrowhead Corporation: Dec., 1904 to June, 1922, inc. U. S. Geological Survey: Feb., 1930 to Sept., 1934, inc.

Mojave River at Upper Narrows (Victorville)

U. S. Geological Survey: Mar., 1899 to Dec., 1906, inc. Dec., 1930 to Sept., 1934, inc.

^{*} It is difficult to define exactly the Western boundary of Mojave River Basin in its upper part. Contours of Water Table in the report of the Mojave River Commission are lacking near Sheep Creek, south of an east and west line through Victorville. North of this line contours contained on map published in Bulletin 5 indicate the hydrographic divide to be about two miles east of Sheep Creek and about seventeen miles west of Victorville. The northernmost tip of Shadow Mountains is about six miles north of the east and west line through Victorville and about five miles east of Sheep Creek so that underground water from Sheep Creek which gets to a point directly west of Victorville probably could not move toward Mojave River. It is probable that some Water which has percolated from Sheep Creek in its first six miles below the mountain toe moves toward Mojave River underground. The hydrographic divide at Sheep Creek would cause Sheep Creek water to flow northerly fanwise in part probably going to Antelope Valley, in part to the sink to the north and in part probably to Mojave River.

RESIDENCE OF THE PERSON NAMED IN

The same of the sa

The second secon

THE PART NAME OF THE PA

THE RESERVE THE PARTY OF THE PA

TWO WANTS OF THE PARTY OF THE P the first of the country of the party of the country of the countr THE RESERVE AND ADDRESS OF THE PARTY OF THE the latter of the control and the latter of the control of the latter of of all sales of contents or a section of contents of continues of continues of the To our out to the court own to the party of the court of the court to the the total actions within It it because the all printed Local Law Al Downston Square will have not than 500 to home with THE RESERVE THE PARTY AND PARTY AND PARTY AND PARTY AND PARTY. the county of the same plants to have a long to be said. any nature was and the Transpiral II .- well weaked from a good has ALAT - The party and the party the sales of the country of the control of the country of the coun of the last of the with the state of ATTACA OF THE REAL PROPERTY AND ADDRESS OF THE PARTY AND ADDRESS OF THE

Mojave River at Lower Narrows
Lake Arrowhead Corporation: Dec., 1904 to Sept., 1915, inc.

Mojave River at Point of Rocks
Lake Arrowhead Corporation; Dec., 1908 to June, 1911, inc.

Mojave River at Hodge
U. S. Geological Survey: Oct., 1930 to Sept., 1932, inc.

Mojave River at Barstow
U. S. Geological Survey: Oct., 1930 to Sept., 1934, inc.

Mojave River at Afton
U. S. Geological Survey: Jan., 1930 to Sept., 1932, inc.

In addition to these regularly maintained gaging stations, measurements were made by the U. S. Geological Survey on the same day once each week during 1931-32 when flood waters were not in the stream at Upper Narrows gaging station, Lower Narrows, Bryman, Helendale (just above Point of Rocks), Wild and Hodge gaging station. A few measurements were made at some of these points and at other points prior and subsequent to 1932.

Those of 1931-32 are used herein because most complete.

Complete daily and monthly records of discharges at stations and results of the isolated measurements are found in the Water Supply Papers of the U. S. Geological Survey. The monthly records of the Arrowhead Corporation are published as a part of this report. The daily records are contained in a mimeographed publication of the Division of Water Resources. These and the monthly records were calculated by the Division of Water Resources from original data furnished by the Corporation.

The West Fork and East Fork stations do not measure the entire mountain runoff as there are diversions above the West Fork station for irrigation in the mountain valleys and the diversion for the conduit leading to Hesperia above the East Fork station. Arrowhead Lake also loses water by evaporation and there is some irrigation around it. Prior to its development the floor of the lake was of a swampy nature so that evaporation

Any peol of the company to appear to appear to a plant and a plant and the relieus straight and the relieus an

The state of the s

from the lake is not entirely a new draft on the stream. When the recorded discharges of the two forks are added, the discharge of Mojave River at the mountain toe is the result. The estimates of mountain runoff herein used are from the recorded discharges.

All these various records are useful in determining percolation in various areas, rising water at various points, consumptive use of the cultivated and natural vegetation along the river. The record at Afton gives the final waste past which any use of water for a general development is not possible.

Measured Losses of Water in Plains Area

From the Forks to Upper Narrows

During the investigation of the Division of Water Resources the water table stood at about 40 feet below the streambed at a distance of five miles below the Forks. After the flood of 1932 it had raised 25 feet but fell 20 feet during the succeeding summer. From this point the depth gradually decreases upstream to the Forks and downstream to a distance of about four miles above Upper Marrows where the water table intercepts the surface. Trees, evidencing high water table, are found in the river bottom extending six miles above the Upper Marrows.

Discharge records give the loss in this section of the river.

If corrected for change in underground storage the result would be the consumptive use.

Table 23

Loss from the Forks to Upper Marrows

Annual Acre Feet, October to September, inc.

	Discharge at Forks	Discharge at Upper Narrows	Loss or Gain
1904-05	105,300*	97,600	7,700 loss
1930-31	15,400	21,700*	6,300 gain
1931-32	99,300	84,200	15,100 loss
1932-33	22,500	23,900	1,400 gain
1933–34	16,100	23, 800	7,700 gain
* October a	ind Movember estim	hate	,

CONTRACTOR DESCRIPTION

se la rell, all more all activises

THE RESERVE OF THE PARTY OF THE

AT A DESC.

THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER.

	THE PERSON NAMED IN	appropriate to	
THE PLANS	ENDEL NOTE IN	100	
WELL THE T	00m, fm.	ADDED TO S	30-30011
11 0 0 5 1	4007000	100047118	70-0057
9997 Page 1		15-10-2	1177
•	100H PS.	007,85	199-999L
o have TATH of		=1,15	NI-CHI
		and the second second second second	AND DESCRIPTION OF THE PERSON NAMED IN

The above indicates a regimen typical of such underground basins. In the approximately normal years such as 1931-32 and 1904-05 following years of small rumoff, the outflow is less than the recharge and in low years the reverse is true. In addition to the surface outflow measured at the Narrows there is draft caused by the consumptive use of vegetation, evaporation from the stream surface, and underflow, which as previously stated, is estimated by Slichter to be five-tenths second foot.

Consumptive use in this section of the river may be estimated by comparing the amount of rising water in the winter month in which evaporation and transpiration is the least with the amount in other months of the year. The difference should approximate the consumptive use, when corrected by a small addition to allow for evaporation in the month on which the estimate is based. To do this, years in which floods are at a minimum must be used in order to avoid inaccuracy caused by calculating a differential between two large flows. Although older records indicate some years in which there were no floods, it is deemed advisable to use only the records in late years because of greater accuracy. In the table, January of both 1933 and 1934 gave the greatest discharge and that month is used as the base.

Rising Water at Upper Marrows, and Consumptive Use, Forks to Upper Marrows

	1932–33	1933-34
Oct.	1,840	1,820
Nov.	2,140	2,170
Dec.	2,520	2,420
Jan.	2,920	2,780*
Feb.	2,370	2,200
Mar.	2,400	2,180
Apr.	2,140	1,810
May	2,020	1,690
June	1,510	1,540
July	1,380	1,210
Aug.	1,210	1,110
Sept.	1,480	1,290
Total	23,900	22,200
Total for year if at same		
rate as average for January	34,400	33,400
Difference	10,500	11,200

Average for the two years - 10,900 acre feet.

*Small flood on first two days of the month. Total flow for first four days subtracted and flow at same rate as that which occurred on the fifth added.

Actually there is some water consumed by evaporation even in the coldest month, especially in an arid climate such as that of the Mojave Basin. In the method used in the foregoing calculation the water used during that month is subtracted at the same rate for the remaining eleven months. To allow for this it is believed that the average for the two years should be increased by about 2000 acre feet, giving 13,000 acre feet as the estimated consumption above Victorville Narrows.

Upper Narrows to Lower Narrows

The stream flows in a broad canyon-like valley in this section.

Bottom lands support a heavy growth of trees and there is some irrigation.

Springs appear along the west canyon wall but have not been measured. This

PE SUNTE

The property of the last of the same and the

Best	TO-ENDA.	
200 M	i I	4/50
THE TO	i i	Distr.
	9	100 m
	000.5	10/4
		NAME.
30(10.2)	The Life	-7 (4)
Division	LUC	NAM .
30000	1 1 1 1	٠
Lui	r .	10/2
1,11	ONE, E	184
Coffin	Dux I	4 C+5
100,00	Fu (5	2000
		c .l s
6	999.	т от т
10,000	(50,0)	5007017 V

LINE HER DOCATE HAVE BEEN AND AND SHEET

Large with the first and the second of the second of the first Large for the first and the second of the second of

The state of the s

DESCRIPTION FROM THE

The street was the second to the second street and the second sec

flow is from the underground water resulting from percolation from minor streams west of Mojave River probably to Sheep Creek. The increment can be estimated by the measurements made on the river flow in the dormant season when transpiration losses do not mask the inflow.

Table 25

Average of Isolated Measurements by U. S. Geological Survey at Upper and Lower Narrows, 1931-32

	Upper	Narrows	Lower	Marrows	
	Number of	Average flow	Number of	Average flow	Difference
Month	Measurements	Second Feet	Measurements	Second Feet	Second Feet
Oct.	5	30.4	5	30.8	+ 0.4
Nov.	4	31.8	4	35.5	+ 3.7
Dec.	4	36.0	4	41.3	+ 5.3
Jan.	4	38.8	4	42.0	+ 3.2
Feb.	1	42.0	1	42.0	0
16	7	70.7	7	70 7	. 0.4
May	3	38.3	3	38.7	+ 0.4
June	5	26.6	5	24.4	- 2.2
July	4	21.3	4	18.0	- 3.3
Aug.	4	22.0	4	19.8	- 2.2
Sept.	5	23.8	5	21.2	- 2.6

Records of the U. S. Geological Survey at the Upper Narrows and of the Arrowhead Corporation are shown in Table 26. When compared they show losses for all months instead of gains during part of the time.

Table 26

Comparison of Discharges at Upper and Lower Narrows except in Time of Flood

Acre Feet

Month	Upper Narrows	1904-05 Lower Narrows	Differ- ence	Under Narrows	1905-06 Lower Marrows	Differ- ence
Oct. Nov. Dec. Jan. June July Aug. Sept.	3,630 3,700 2,580 1,990 1,940 2,380	2,830 2,550 1,540 1,320 1,590 1,660	- 800 - 1,150 - 1,040 - 670 - 350 - 720	2,860 3,810 4,120	2,380 2,770 2,840	480 - 1,040 - 1,280

No aller

make the later of the substantial beliefed to communicate the state of the substantial state of

U-0110 F	The Land	11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Tell Control		10-19
5-7 5-7 5-17	5155 5155 5155 1157	-1	1.00 2.00 2.00 2.00 2.00	1	2-03
9-1 - 9-1 - 1-1 -	1,00 3,00 3,00 8,00 1,77		5,40 5,40 5,40 5,40 5,40		SAM SAM SAM SAM SAM SAM

AND ADDRESS OF THE PARTY AND ADDRESS OF THE PA

pull from the last of the last

TR LIVE

Company have a first service of the continued of the cont

	32-201 TOTAL 1500-	10	-07160 -07160	C-100	and the same of th	
-1,000 -1,000 -1,000 -1,000	200.0	000 to 00	000 - 50X,4 - 000,6 - 000 - 000 -	100 mm		-100 -005 -005 -005 -005 -005

The inflow from springs is visible and in such a situation invisible inflow is also to be expected. Therefore there should be some gain in this section of the river unless losses in the dormant season exceed the gains, which is unlikely. As the series of measurements compared in Table 25 are both by the U. S. Geological Survey, the results in that table will be used. From it and based on known variation in transpiration records as determined by the U. S. Department of Agriculture*, the following is made up.

Table 27

Estimated Loss and Gain
Upper to Lower Marrows

Month	Second Feet
Oct.	0.4
Nov. Dec.	2.7 4.0
Jan. Feb.	4.0 2.5
Mar. Apr.	1.0
May	- 1.8
June July	- 2.5 - 2.8
Aug. Sept.	- 2.6 - 0.5
Average	0.28
401020	0.20

If four second feet be regarded as the gain from springs and under-seepage, the difference between that and the above average loss for the year represents transpiration and evaporation loss. The difference is 3.72 second feet or a total of 2690 acre feet for the year, to which should be added about 10 per cent as in the estimate of transpiration above Upper Narrows, giving a total of about 3000 acre feet.

^{*} Bulletin 44, Division of Water Resources, "Water Losses under Natural Conditions from Wet Areas in Southern California", by Harry F. Blaney, Division of Irrigation, Bureau of Agricultural Engineering, U. S. Department of Agriculture.

Det the self benefited the new world of Serger

and have	
	0
.5.6	196
	1000
D-I	01
*	total .
9-0	100
142 -	100
3540	received.

The second serious and the second second second serious and the second secon

American de la companya del la companya de la companya del la companya de la comp

The Forks to Lower Narrows

Records were kept at both points for many years by the Arrowhead Corporation and the annual differences are shown in Table 28.

Difference in Flow
Forks and Lower Narrows
Acre Feet

Table 28

	Forks	Lower Narrows	Difference
1904-05 06 07 08 09 10 11 12 13 14 15	106,000* 135,000 255,000 58,600 96,200 131,000 147,000 45,200 25,900 165,000	70,300* 103,000 202,000 48,800 90.700 138,000 130,000 47,300 31,300 160,000	- 35,700 - 32,000 - 53,000 - 9,800 - 5,500 - 43,000 - 17,000 2,100 5,400 - 5,000 10,000
verage loss	100,000	1 10.000	- 16,700

^{*} October and November estimated.

The average annual loss between the Forks and Lower Narrows is estimated to be 10.000 acre feet by combining the estimates of loss above Upper Narrows and loss between Upper and Lower Narrows previously given. By Table 28 the average difference is 16,700 acre feet, and to this should be added the inflow from springs which is taken at 4 second feet, giving about 20,000 acre feet loss. This amount is too large by the annual increase in storage above the Marrows during the wet period covered by the measurements. Correction for change in storage underground cannot be made because of lack of data. For the purpose of this report the loss is taken at 18,000 acre feet with 14,000 acre feet above Upper Narrows and 4,000 acre feet between Upper and Lower Narrows.

And the second section of the second section is the second section of the second section in the second section is the second section of the second section in the second section is the second section of the second section in the second section is the second section of the second section in the second section is the second section of the second section in the second section is the second section of the second section in the second section is the second section of the second section in the second section is the second section of the second section of the second section is the second section of the section of the

and the state of t

IN SHIELD

NAME AND ADDRESS OF THE PARTY O

	motorist.		
		*000,007	10-y-001 10- 10- 10- 10- 10- 10-
100 - 100 - 100 -		557-1	mil at all

The Part of the Pa

Lower Narrows to Barstow

A surface stream existed for 10 miles below Lower Marrows at the time of the survey in October, 1929, and evidences of high water table are found for another 10 miles or to a point about two miles below Hodge on the Santa Fe railroad. For the next five miles trees are very scattered or non-existent but in the six miles below gradually grow more luxuriant.

Point of Rocks is about a mile below Helendale on the Santa Fe and about four miles below the end of the surface stream mentioned.

The difference between discharges at gaging stations maintained by the Arrowhead Corporation at Lower Narrows and Point of Rocks is shown in Table 29.

Table 29

Difference in Flow
Lower Narrows and Point of Rocks
Acre Feet

	Lower Marrows	Point of Rocks	Difference
1908–09 09–10 10–11	90,700 138,000 130,000	80,100* 111,000 113,000**	- 10,600 - 27,000 - 17,000
		Average	- 18,200

^{*} Small flows in October and November estimated.

The difference between discharges at gasing stations maintained by the U. S. Geological Survey at Upper Narrows (Victorville) and Hodge is shown in Table 30.

Table 30

Difference in Flow
Upper Narrows and Hodge
Acre Feet

	Upper Narrows	Hodge	Difference
1930-31	21,700*	2,320	- 19,400
1931–32	84,200	59,500	- 24,700

^{*} Small flows in October and November estimated.

^{**}Small flows in July, August and September estimated.

Land the control or the land of the land o

SE ORGAN

serial Triples Commented entry?

Spinning to	300 Table	the large	
001,01 - 001,01 - 00 - 71 -	10001,05 000111E -0000111E	00 /00 000 /000	00-00% 00-05 3.0-0.6
006, 11 -			

Control of the Contro

And the second of the second o

OF SELVE

Talk or some in the start of th

BUCCHES		EXISTING.	
CONTRACT OF	011.3	7007 .23	T1-00-1
00%/6-1-	0.08,08	7000,000	25-092

Abstraction a second of the manufacture of south lines of

The greater loss in 1931-32 is believed to be mostly because of the greater percolation opportunity due to the larger amount of water. The percolation from floods of February, March and April in that year was about 10,000 acre feet.

Inflow from West Side below Lower Narrows. The measurements made each week by the U. S. Geological Survey during 1931-32, except at flood time, indicate that in the fall after irrigation ceased and transpiration losses decreased, the surface stream gradually pushed farther downstream. The average of the measurements for each month beginning October, 1932, until February, when a flood occurred, is shown in Table 31.

Table 31

Stream Flow from Lower Narrows to Hodge
Average of Measurements
Second Feet

	Number of Measurements	Lower Narrows	Bryman	Hel dale	Wild	Hodge
Oct.	5	31	25	*	0	0
Nov.	4	36	32	30	林	0
Dec.	4	41	42	37	29	*
Jan.	4	42	47	45	44	22
Feb.	1	42	48	44	39	31

^{*} Flowed only part of month.

By the end of January, apparently the sands beneath the river bed had practically filled down as far as Wild. Transpiration and evaporation losses would be at a minimum in that month and the measurements indicate a gain of five second feet from Lower Narrows to Bryman with no further gain below. This is believed to be from the underground water on the west side. There is no reason found so far that some inflow would not occur between Bryman and Helendale but the measurements do not show it. Below Helendale the river turns to the northeast and its direction approximates the direction in which the water table is sloping so that

by community and an administration for the street of the street of

to profit in the Plant of Primary material to the Primary material and the Primary of States and Applications of Primary and Primary and Applications of Primary and Primary a

A COLUMN TO SERVE AND ADDRESS OF THE PARTY O

594		201 1	2-1	7 (5)	10 - 0-	
0.		ă,		Dic-		41.0
4		94	,			- 25%
-		ī,		11	- V	-0.01
	18		7		1.6	.66
				12	X	. 107

all men in the sales been in

inflow would not be so probable. The annual increment from the west below Lower Narrows is estimated to be 4000 acre feet. That above between Upper and Lower Narrows was estimated to be 3000. In round figures this is ten second feet. In addition there should be underflow from both sides for a distance above Upper Narrows but no reliable estimate of it can be made with present data. It is neglected in calculations of water supply.

Incidentally the measurements indicate that about 5000 acre feet will fill the voids in the bottom lands from Lower Narrows to Hodge, a distance of 17 miles even after a series of dry years.

Mojave River and Sheep Creek is 5500 acre fect. That of Sheep Creek is also 5500 acre feet. In years of large runoff some of this presumably reaches the sink known as Dry Lake and is evaporated. Some percentage of Sheep Creek water difficult to estimate moves underground into the Mojave River Basin. If it is 10 per cent, the total tributary to Mojave River Easin from the west side is 6000 acre feet. This is to some extent drawn upon for irrigation and there would be some lost by evaporation before getting underground. Some which has reached the water table may reach Mojave River above Victorville. Estimated in this way the annual average increment tributary to Mojave River is less than the 7000 acre feet estimated as heretofore described and accepted as the basis for calculations of water supply herein.

For the area between Sheep Creek and Mojave River the average annual runoff during the 29 year period on which water supply estimates are based is 4400 acre feet. For the same period 10 per cent of estimated annual average runoff of Sheep Creek is 400 acre feet giving a total of 4800 acre feet (minus the losses above noted) as the average annual increment to Mojave River for that period. This estimate should also be compared with the 7000 acre feet estimate.

and the second of the second o

These estimates indicate that underground water in the territory from Mojave River west inclusive of that supplied by Sheep Creek is very small compared to the available land.

Loss Hodge to Barstow

The loss between gaging stations maintal and at Hodge and at Barstow by the U. S. Geological Survey is shown in Table 32.

Table 32

Loss of Water Hodge to Barstow Acre Feet

	Hodge	Barstow	Loss
1930-31	2,320	0	2,320
1931-32	59,500	40,300	19,200

The loss is almost all percolation into the streambed. During the investigation the water table at the deepest point about nine miles above Barstow was 25 feet below the surface. Actual loss in the year is greater than that shown in the table for 1930-31 and less for 1931-32 as storage in the basin decressed in 1930-31 and increased in 1931-32.

Barstow to Afton

At Afton there is always a small flow caused by the overflow from the basin above it and below Forks-of-the-Road Fault. In only one year of the investigation did a surface stream force its way from Barstow to Afton. During that year the stream flowed at Barstow from February 9 to May 10, inclusive, giving a total discharge of 40,300 acre feet. The flood water ceased to flow at Afton about March 8, and the discharge of flood water during that period after deducting normal rising water is estimated at 7000 acre feet. Of this, about 1000 acre feet was evidently from a local storm as the discharge at Afton rose from 16 second feet on February 16 to 274 second feet on February 18 with a rise of only 68 second feet at

The same sales for the contract of the same sales and the sales and the

ST - SOUTH

maked to small or spirit

FOR NUMBER

Barstow. When corrected for this, the flood from the mountains reaching

Afton becomes about 6000 acre feet, indicating a loss mostly by percolation

of 34.300 acre feet in that section of the stream.

Forks to Afton

The total discharge from the mountains plus increments below minus flow at Afton gives the loss each year. As the only record of flood flow past Afton is in 1931-32, that year's record is the only one indicative of the total loss in the stream system. Increments other than springs from Upper Narrows to Bryman are probably negligible.

Table 33

Loss of Water
Mountains to Afton
1931-32
Acre Feet

Inflow

Using round figures it may be said that 100,000 acre feet was lost by evaporation and transpiration or stored underground in 1931-32.

This is the same as the discharge in that year from the mountain headwaters.

The water stored was not lost during that year although it may be lost in subsequent years. The loss or use is the water evaporated and transpired by the native vegetation in areas of high water table, by the irrigated land and by the towns and railroads. The water table was slightly higher in the fall of 1932 than in the fall of 1931 and thus permanent or over year storage took place. If several wet seasons occurred in succession the water table would gradually rise above the level of fall, 1932, to a point where rising water outflows would balance the input. The

TO THE REAL PROPERTY.

collection of the party of the

PROPERTY AND INCIDENT

while the result with a larger content of the first with the suff with t

51 - 3145

proceedings of the process of the pr

Local Company (1994) and the company of the company

water table slopes away from the river to the nor' below Hodge and to the northeast below Daggett and it is conceivable that the additional rising water might appear not only in the river but at points north of it, but no record of wet spots of magnitude to the north is found except Harper Lake to which underflow from Mojave River must be small, as the underground outlet to the lake is very constricted. Harper Lake was dry during the period of investigation. Below Forks-of-the-Road Fault an ancient lake existed. Its exact boundary is not known but its western end is thought to have extended almost to the fault and the lake bed formation would militate against rapid underground flow from the river.

Because the water table slopes away from the river and because there is such a large amount of native vegetation along the channel, both of which would lower the water table at the river during the growing season when the stream is dry, there would always be space after the growing season into which the floods could percolate. It is believed, however, if the discharge of 1931-32 had occurred after a pries of wet years instead of a series of dry years, that because of the higher water table the apparent loss above Afton would have been less.

Beneficial Consumptive Use of Water

The irrigated areas shown on Plates 5-A, B, and C in pocket are only those drawing on water from the river. They are taken from aerial photographs which included only those areas influenced by the river. There are additional irrigated lands not shown and also not dependent on the river. The irrigated area around Hesperia (not shown) is supplied from East Fork diverting above the gaging station so that it is not drawing on the measured supply at the Forks. The irrigated area at Adelanto (not shown) is supplied in large part from the river.

production of states

A ground survey was not made so that the crop on each acre is not known. It is believed that about 80 per cent of the cropped area is in alfalfa with the remainder in vegetables, hoed crops and orchard. The consumptive use of alfalfa is taken at 3.0 feet in depth per acre per year and of other crops at 2.0 feet. This would make the average 2.8 acre feet per year and that value is used in estimates. The total consumptive use of the 6019 acres irrigated in 1929 would be 16,900 acre feet. As there has been some abandonment since then the total for the present is taken at 15,400 acre feet.

The consumptive use for the towns, railroads and industries is roughly estimated at 1100 acre feet per annum, giving a total of 16,500 acre feet.

Disposal of Water

In fall, 1932, the water table near the stream was higher in general than in fall, 1931. That of fall, 1931, was lower than that of fall, 1930. Information as to the exact amount of the best but sufficient to make rough calculations of the volume of storage change if values are assigned to the specific yields of the aquifers in which the change of elevation took place. Values as shown in Table 36 were assigned to specific yields in the different classes of alluvium and calculations made.

Water is disposed of in the area under study by consumptive use and evaporation, by storage underground and by outflow past Afton. Consumptive use may be beneficial, i.e., for irrigation, domestic, and industrial uses, or non-beneficial, i.e., for native vegetation.

It was found that no consistent results could be achieved when attempts to balance input against draft and storage change in the various

THE RESIDENCE OF STREET AND ADDRESS OF THE PARTY OF THE P

where the second state of the second second

smaller basins into which the valley could be subdivided. For instance, if the 14,000 acre feet estimated consumption above Victorville be taken as correct, only 1000 acre feet can be assigned to storage increase from fall, 1931, to fall, 1932, if the equation is to balance. The storage increase between Hodge an' Parstow between fall, 1931, and fall, 1932, is estimated at 11,000 acre feet. The major portion of this is in Hinkley Valley for which the estimate is believed more reliable than that for other areas. As this is more than 50 per cent of the total estimated storage in that year above Barstow, if the Whole area above Barstow is taken, errors in other basins would not affect the overall estimate for the whole area in the same degree as the errors affect the estimates for the separate smaller basins. Therefore, in order to give an idea of the disposal of water probably less erroneous in its evaluations, the valley is divided into two sections, Forks to Barstow and Barstow to Afton. Tentative estimates of the methods of disposal are shown in Table 34. After all data were studied it was still necessary to assign arbitrary values to the storage change plus non-beneficial consumption and considerably different values may be found if investigation continues and more information is gathered.

Table 34

Disposal of Water in Mojave Basin below the Mountains, 1931-32

Acre Feet

		Barstow	
	Forks to	inclusive	Forks to
	Barstow	to Afton	Afton
Inflow			
River	99,200	÷0,300	99,200
Springs, etc.	7,000	1,000	8,000
	106,200	41,300	107,200
Disposal			
Surface outflow	40,300	7,900	7,900
Stored underground	26,000	16,000	42,000
Beneficial consumption			
Irrigation	12,700	2,700	15,400
Domestic and Industrial	400	700	1,100
Non-beneficial consumption	26,800	14,000	40,800
•	106,200	41,300	107,200

Note: Figures for non-beneficial consumptive use in the above are those which added to other amounts under "Disposal" will balance "Inflow" and "Disposal".

000,00.

500,0


comment of the comment of the state of the comment State of the second of the sec and the second of the second o TO THE REAL PROPERTY AND ADDRESS OF THE PARTY polarity of the first the party of the World of Strate of the AND RESIDENCE AND ADDRESS OF THE PARTY OF TH THE RESERVE TO SHARE THE PARTY OF THE PARTY with the party and the party of the party and the party an with an extend of the court of the contract of the court the second or publishers on the second or the second of the second of the All the last to compare the control of the last testing and the last STATE OF THE PERSON NAMED IN COLUMN 2 ASSESSMENT OF THE PERSON NAMED IN which is proved up to the second or their property we will problem. with the second of the second the second section of the second section is a second section and the - Committee - The Committee of the Commi

200 THE R

-1-04-10-04-02

	2000	776	
-111			
		- 7	-12 -14
	10000		7,441,184
W. C		THE T	
		00000	3

The second state of the second second

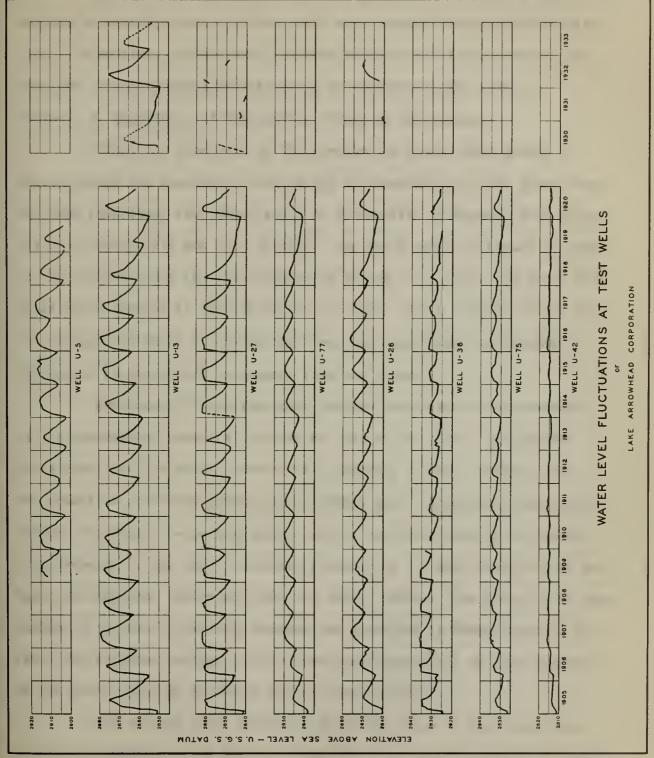

Water Table

Contours of the water table as of fall, 1930, are shown on Plates 5-A, B, and C in pocket for the area in which elevations of ground surface or measuring point at the wells were secured during the investigation. In addition, water table contours from the mountains north to Dry Lake and extending about 20 miles west of Victorville are shown in Bulletin 5, Department of Engineering, State of California.

Under the mesa west of Victorville the water table slopes to
the northeast and apparently there might be underflow into the river from
the west from about four miles south of Victorville to Bryman, nine miles
north of Victorville and even further. The water table continues to slope
to the northeast but the river gradually swings to the east and about five
miles above Barstow is flowing almost due east. For a distance above this
the underground water is moving away from the river under the Hinkley
Valley and is maintained by seepage from the river.

From about five miles above Barstow the direction of movement of the underground water is the same as that of the river. At Barstow the stream turns to the so beast and at Daggett to the northeast, but the underflow continues practically straight east. Apparently water goes through the Forks-of-the-Road Fault, and on the south side of the valley from Newberry to Dry Lake the slope is almost in same direction as the Santa Fe Railroad. Below and near the fault, however, the slope is at right angles to the fault, probably because the underflow is dammed back by the fault but trickles through it into more porous material, as seems probable by the steep slope of the water table below the fault.

For several miles below the fault the slope of the water table is at right angles to the fault but gradually the slope swings to the north and has a much more northerly direction than the stream.

On the east side of the stream below where it enters the plains, and on the south in the vicinity of Earstow where the stream is flowing easterly, the water table slopes toward it. However, the watershed is small and the contribution is negligible below Victorville although possibly of sensible proportions for a short distance above.

Area of Influence of Mojave River

The approximate ortimated boundary is shown on Key Map. The area included totals 333 square miles. The boundary is deduced from water table contours, geology and topography. Presumably the constricted underground channels north of Hinkley Valley would restrict movement of water toward Harper Lake from Hinkley Valley so that even if greater pumping draft were made north of Hinkley Valley the amount of water passing out of it to the north would be small. The aquifers from the river to Hinkley Valley are apparently very porous.

Newberry-Dry Lake area would not, it is believed, transmit water from the stream as freely as is possible to Hinkley Valley, and as the water reaching the Newberry-Dry Lake area from the river is that which has percolated to the south side below Barstow and above Forks-of-the-Road Fault and must pass through the fault to reach the area, it is believed that its flow would be so impeded by the fault as to cause serious question whether a large amount could enter the area from that direction even were the water table lowered greatly in the area. Below the fault the lake bed formations which begin at some not definitely located point would also impede movement of water into the area from the river although it mint freely enter below the fault to the point where the lake bed formation begins.

and it would be exceeded in a

The movement of water from the river to the north side of the river in its lower reaches could not occur except in very small amount, above Daggett, as mountains approach the river too closely. Movement outward to the north below Daggett would also be restricted because of proximity of the mountains on the north side. As on the south side, water leaving the river above the fault could percolate through the fault and on, parallel to the river. As with the south side, movement from the river would be impeded to the north by the lake bed formations below the fault.

Pressure Areas

The Mojave River Basin has three known pressure areas and a fourth, covering considerable territory above Afton, which from the nature of its deposits should have pressure characteristics although there is no available hydrographic data to substantiate this hypothesis. The areas are as follows:

(1) An area of indeterminate size located in the vicinity of Victorville, roughly limited in a north-south direction by the boundaries of the present area of rising water. The limits in an east-west direction from the river are not known, though it is conjectured that it extends two or three miles at least to the west of the river and a shorter distance to the east. Within this area the deep wells show the greatest pressure. One well located in the SE½ of Section 16, T 5 N, R 4 W, S.B.B.&M., had a rise in water level of about 20 feet in strata below 350 feet depth while drilling several years ago. Wells of the Rancho Verde located south of Victorville had pressures in their lower strata equivalent to 5 to 25 feet of head greater than in shallow strata. A well located in the NE½ of Section 35, T 5 N, R 4 W, S.B.B.&M., drilled prior to 1917, with a total depth of 985 feet, reported an artesian head of 45 feet above the ground while drilling at about 400 feet.

HERMAN STREET

- (2) A pressure area in the vicinity of Harper Lake, which no doubt has its area confined approximately to the present surficial depression.
- (3) An area that parallels and abuts the Forks-of-the-Road Fault on its eastern boundary. Its areal extent is approximated by the extent of the alkali area which forms a belt about one and a half miles wide above the fault.
- (4) The high ratio of sedimentary clay (about 50 per cent) contained in the greater part of the area east of Forks-of-the-Road Fault suggests the presence of an extensive pressure area. Hydrographic data indicates that a belt extending a few miles to the east of the fault is excluded from the postulated pressure area, however.

Fluctuations of Water Table

Plate 3 shows graphs of certain wells at which elevation of water table was measured frequently by Arrowhead Corporation from 1905 to 1920 inclusive. Measurements were also made at such of these wells as could be found by the Division of Water Resources and U. S. Geological Survey and graphs of these are shown on Plate 3 also.

Location of the wells is shown on Plates 5-A to C. As they are all near the river large seasonal fluctuations in water table were found, due to percolation from the river when in flood and rapid equalization of the water table as the water near the river moved laterally away from it or drained out of the basin. These graphs indicate that the first two years of heavy runoff in the wet cycle which began in 1905 filled the basins as there was practically no annual rise thereafter.

Comparison of water table elevation during the investigation of the Division of Water Resources and the elevation for fall, 1919, as given in Water Supply Paper No. 578 is rather difficult because of paucity of

DESCRIPTION OF

records. What there are indicate in general a recession as could be expected since the runoff has been subnormal. In the Upper or Victor Basin the maximum recession between fall, 1919, and fall of any of the years during the present investigation in which measurement was taken has been 4.8 feet. This was fairly near the lower end of the basin and it probably was further south but no comparative records are available.

In Hinkley valley the general recession in the period above described is thought to be about five feet. Below Barstow the average recession was greatest in the vicinity of Daggett where Well L-5 shows 18.9 feet drop, L-9. shows 17.7 feet drop and two others about 8.0 feet. Further east the recession has been about five feet. Below the fault there has been little change.

CHAPTER VII

DEVELOPMENT

This investigation has not gone into plans for further development and it will not be discussed except to point out its effect on present conditions.

The following tables give (1) the estimated average annual water supply available for different periods, (2) the reservoir capacity required for annual drafts of various amounts whether by beneficial consumptive use or by evaporation, transpiration or other losses, (3) the known surface reservoir capacity available, and (4) the approximate underground reservoir capacity to various depths below the surface.

Table 35

Estimated Average Annual Water Available in Mojave Valley for Different Periods Acre Feet

<u>Period</u>	Years	Mountain Discharge	Inflow from Springs	Total
1883-84 to 1894-95	12	219,000	7,000	226,000
1895-96 to 1904-05	10	42,000	7,000	49,000
1905-06 to 1921-22	17	122,000	7,000	129,000
1922-23 to 1933-34	12	46,000	7,000	
1905-06 to 1933-34	29	90,000	7,000	97,000

DE CENTER

- 1114

pulped motest of motion and analysis of long the last acting formal day.

London, at Depth of J. (a. 1. for a), and the second of the long formal day.

The literature control of the literature of the

	1501 30 .	8117	hou
		200	/IL-POST OF BENEFIT 10-10-12

Table 36

Storage Capacity Necessary for Various Safe Annual Yields
Including Evaporatio., Transpiration and Rising Water
Passing out of basin, for the 29 year period
1905-06 to 1933-34
Acre Feet

From	Yield From		Necessary Reservoir	Ratio Reservoir Capacity
Mountains	Springs	Total	<u>Capacity</u>	to Yield
13,000	7,000	20,000	13,000	•6
23,000	7,000	30,000	33,000	1.1
33,000	7,000	40,000	61,000	1.5
43,000	7,000	50,000	96,000	1.9
53,000	7,000	60,000	152,000	2.5
63,000	7,000	70,000	239,000	3.4
73,000	7,000	80,000	356,000	4.5
83,000	7,000	90,000	483,000	5.4
90,000	7,000	97,000	579,000	6.0

Note: "Necessary Reservoir Capacity" in the foregoing is the result of calculations based on the entire supply and not on the supply remaining after taking care of present uses. A part of the "necessary reservoir capacity" now exists as a result of present draft on the underground basins and is being utilized to support the draft consisting of both beneficial and non-beneficial consumptive use and rising water outflow past Afton. If the present use is 57,500 acre feet as estimated, this draft plus rising water at Afton is using about 140,000 acre feet of underground storage capacity. To supply 30,000 acre feet additional draft would require about 330,000 acre feet of additional storage.

Table 37

Surveyed Capacity of Known Reservoir Sites in
Mountain Headwaters and Estimated Average Annual Discharges

Site	Surveyed Capacity Acre Feet	Average annual of at site Acre Fee 1905-06 to 1933-34	
Victor Forks	350,000 113,500	90,300 57,000*	42,000 25,000*
West Fork Mo. 2) alternates West Fork Mo. 3) Grass Valley Deep Creek Holcomb Creek Arrowhead — partially constructed	34,800 30,000 7,600 2,000 1,000 60,100	33,300** 24,300 23,200 2,600 15,700 8,000 8,400	17,000** 12,400 11,800 1,160 7,200 3,700 3,840

^{*} East Fork

^{**} West Fork

THE REPORT OF THE PARTY OF THE

6///100			JAN.	
Mission Ways and		φ	c	# 10 m 0
12.0	70 . 1	t	0.039	-000 EL
	State of the last	000,73	12.11	0.10
945	TOTAL DE	000,00	TEO,T	
	1000,10	000,02		000.73
	1.0	100,0	100-11	21,000
July 1	One part		000,7	105,68
1.	Language and the same of the s	191,19	1 6	EEN OF
	2000	000,00	7007	000744
06.0	v .	300,0	1000/1	0.00

75 - 2 - 7

a term of the desired of the reservoir of the original of the second of

**************************************	76	S 74 7. C 20 2. C 10.1 2.0 2.	ACTE.
	* 0 0 0	000,000 000,000 000,000 000,000 000,000 000,000	BRICHERUS 15 - TEST THE COLUMN TH

271 Phys 84

Table 38

Estimated Capacity of Underground Basins
Acre Feet

District	50	Feet below 100	ground surfa 150	200
Forks to Victorville Victorville to Hodge Hodge to Barstow, including	90,000 160,000	220,000 320,000	410,000 480,000	670,000 640,000
Hinkley Valley	290,000	590,000	900,000	1,200,000
Total above Barstow	540,000	1,130,000	1,790,000	2,510,000
Parstow to Daggett Daggett to Fault	50,000 150,000	110,000 360,000	160,000 560,000	220,000 770,000
Total below Barstow	200,000	470,000	720,000	990,000

Note: Voids on which this is based are 18 per cent in river wash and 8 per cent in old alluvium above Victorville, 15 per cent Victorville to Forks-of-the-Road Fault below Barstow and 11 per cent below the Fault.

Referring to Table 37, the average annual discharge for the average and minimum periods at the sites are shown. The average discharges for the same periods are shown for West Fork and East Fork opposite the capacity of Forks Site. A part of East Fork water could be diverted to the West Fork Reservoir. A study of the matter is necessary to determine whether the water available would justify the capacities to which surveys have been made at the various reservoir sites or whether larger capacities are justified if found feasible. No exploration work has been done at the dam sites of Reservoirs Nos. 2 and 3 and more work is necessary at the Forks Reservoir and Victor Reservoir dam sites.

There is no existing problem in Mohave River Basin of failing underground water supplies. On the contrary, after a period of many years of subnormal runoff the water table has fallen only slightly and native vegetation due to high water table is growing luxuriantly on many thousands of acres. Probably more than twice as much water is being consumed

-

other boundaries and the land

	The second		-36-	
20,000	90,00	11,70	700 Sec.	STATE OF THE PARTY
100	100.000	100.04	VILLES.	HERT HELD
20,000	har, r		112,000	Wheel red late
200	2712	200		House it within
			1000	

A CONTRACT OF THE PROPERTY OF

thereby as by all the beneficial uses in the valley. There were 6000 acres irrigated in 1929 by water supplied from the river. Many thousand additional acres above Victorville, between Victorville and Barstow, and in Hinkley Valley are underlain by water supplied from the river. The water table is close to the surface under these areas and good wells are readily drilled.

The obvious method of development would be by individual wells in these areas. It is a method which has been duplicated in many valleys in California. The results of such development would be:

- 1. A drop in the water table.
- 2. A decrease in the area of native vegetation, because the water table would not be high enough to support it, thus setting water free for beneficial use.
- 3. Greater opportunity for floods to percolate into the streambed because of lowered water table and thus a decrease in the waste of floods past Afton. With the physical conditions along the Mojave and the very porous material in the streambeds, "" the water table were lowered sufficiently from the rorks to Barstow and spreading done, the result might be practically complete salvage of flood waste.
- 4. If sufficient area either overlying the river underflow or outside of this area were irrigated by pumping, overdraft might result with ultimate necessary decrease to the draft which could be sustained.

An apparently obvious method by which the present use of water by native vegetation in the river bottom could be changed to beneficial use, would be to cut the cottonwoods, etc., in the bottom lands and substitute cultivated crops, just as already has been done in part. If the estimates of present consumptive use are near the actual facts and the native vegetation is using as much or more water per acre than is used by cultivated crops, this would not upset the regimen of the stream. A study of the situation discloses that there are 7800 acres along the river (Forks to Cady Mountain) on which native vegetation is growing. Of this

- The second state of the se

there are 2300 acres above Barstow and 1400 acres below Barstow of Class 1, 2 and 3 soils (41 per cent Class 3 above Barstow and 72 per cent Class 3 below) and the remainder consists of Class 4, 5 and 6 soils. Class 5 and 6 soils are largely river wash and sand and unsuited to cropping while in Chapter III Class 4 is rated as poor soil. Some of the Class 2 and 3 soils are slightly alkaline.

Thus the probable limit which might be gained in this way would not be more than 3700 acres. It is doubtful whether even this would be feasible without flood control works to regulate the floods and confine the channel. The maps in rear pocket show lines labelled "Old Flood Lines" and "Recent Flood Lines". The recent marks indicate that the floods which caused them practically covered the bottom lands. A confined channel would militate against percolation and if large development were attempted surface reservoir capacity might be necessary.

The beneficial consumptive use in Mojave Basin Valley estimated in Chapter VI is 16,500 acre feet. Whatever the correct figure, it is small because of the few acres irrigated and all of the remainder of the 97,000 acre feet average annual water supply serves no useful purpose. It is partly transpired from the water loving vegetation along the river and evaporated from the water surfaces and wet sand in the valley, or is lost past Afton during floods. All of the 16,500 acre feet except the diversion of surface flow from the mountains during the spring and early summer is a draft on the stream regulated by percolation into the underground alluvial basins, whence it either discharges as rising water and is diverted or whence it is drawn by pumps.

The results of development of additional acreage outlined earlier in this chapter would, if the development were large, bring about a considerable change in the regimen of the river. If a greater draft were made on the Victor Basin the water table in dry years would be lowered, it would

intercept the streambed farther downstream, rising water would decrease, the irrigated area now watered by gravity canals would be forced to pump to secure a supply in part at least, the surface stream which now quickly fills the sands below Lower Narrows and Bryman would be reduced, the water table below Hodge would be lowered, rising water farther downstream would decrease and water table would be lowered farther in reaches between rising water all along the stream to Afton. The same effect on all downstream points would be felt if additional draft were made anywhere along the river. The lowering would not be permanent unless the draft increased to a point where it was greater than the recharge, but the water table would be lower in cycles of low runoff than it now is and would be raised only by the percolation from the years of heavy flood to approximately the same level as would have been reached if no additional draft had occurred.

The same condition would result if large pumping operations in the various basins were instituted to secure water for exportation to areas outside Mojave River influence. In this case the legal situation might offer difficulties. There exist riparian water rights possessed by all the lands along the stream, and underground water rights possessed by all lands overlying the water table within the area receiving all or part of its underground supply from the river. The area above Afton and below the mountain toe receiving water from Mojave River is estimated to be over 200,000 acres although as heretofore stated the amount of water naturally tributary to a large part is believed to be small.

The estimated average annual outflow past Afton over the 29 year period is almost 40,000 acre feet as shown in Table 3. This estimate

This waste is very erratic in occurrence because the consumptive use is a fairly constant annual draft on the supply. Although no measurements are available it is entirely improbable that the floods from the mountains were sufficient to pass Afton in 1927-28 and 1928-29. The record for 1929-30, 1930-31 and 1931-32 shows that in the first two of these years no floods passed the station and only about 6000 acre feet in 1931-32 from the floods originating above the Forks. Again in 1932-33 and 1933-34 the discharge was so small that no flood flows could have passed Afton. The total for the seven years is 6000 acre feet. Study of discharge records and estimates indicate that in the 29 year period beginning 1905-06 there were probably 16 years in which no flood discharge past Afton occurred. in the 18 year period since and including 1916-17, there have been 13 years in which there was probably no flood discharge past Afton and only one year, 1921-22, in which the flood discharge could have been large.

Flood waste must have occurred in large quantities in only eight of the 29 years, which would mean, if the average annual is considered to be 40,000 acre feet, that in those years an average of 120,000 to 140,000 acre feet discharged past Afton. From this it is evident that conservation of part of this waste by surface reservoirs while present conditions in the valley are preserved would entail large reservoir capacity and holdover for twelve to eighteen years (depending on the draft it was proposed to satisfy) to provide for the period up to and including 1934. Evaporation losses would be large. If rainfall continues to be deficient for the next years in the future the period of holdover would be longer and the safe draft less.

en de la companya del companya de la companya de la companya del companya de la companya del companya de la companya de la companya de la companya de la companya del companya de la companya del companya de la companya de la companya

Spreading in Valley

Study has not been made of the additional percolation which would occur with the lowered water table, or whether spreading works to make the stream cover a larger area would be desirable. Neither has study been made of the desirability of some combination of surface reservoir, pumping and spreading works.

Summary

Any large development of Mojave Basin for irrigation would include creating greater underground capacity by lowering the water table in the ground water basins. A combination of surface reservoir, spreading works and pumping operations might be desirable but additional pumping alone would make a considerable development and spreading works would be a help.

The physical situation encountered in creating the greatest possible use would be complicated even if no development now existed, but when the necessities of existing city and irrigation developments are considered and also the at present unused legal rights to water involved, the situation is extremely complex.

SOTTO DE COMPANS

0 403

APPENDIX 1

TABULATIONS OF DATA

In this appendix the following tabulations of data are presented:

- Table 39 Monthly and Seasonal Precipitation at Stations.
- Table 40 Monthly and Seasonal Discharge at Stations.
- Table 41 Regimen of Flow of East and West Forks.
- Table 42 Miscellaneous Discharge Measurements from F. C. Finkle.
- Table 43 Records of Water Levels at Wells.
- Table 44 Areas of Natural Vegetation on Different Soil Classifications.

A term of the second se

Table 39

Monthly and Seasonal Precipitation at Stations

All of the records presented in this table are from the Arrowhead Company excepting that for Big Bear Lake Dam which is from the Bear Valley Mutual Water Company, and that for Squirrel Inn after November 1909 which is from the United States Weather Bureau.

The station at Big Bear Lake Dam is in the headwaters of the Santa Ana River just south of the Mojave River headwaters. All other stations are in the Mojave River drainage area.

2,117.11.2 2.2 2.1 2.1 2.1

Table 39

ASH MEADOWS - N. W. Cor. Sec. 1, T. 2 N., R. 3 W., S. B. M. Elev. 4650 feet approx. Wonthly, Secsonal and Average Amounts of Precipitation in Inches.

Season	28.18		: 17470	96.8	3.59 3	24.83:	8.86	5.80	7.42 :	3.44:	5.64:	!		24.89
						000 5						1		.2 50
Sept.														
/na	0.0		5	ŏ	0	.9.2	ŏ	Ö.	Ŏ.	1.1	ŏ.	i		62.
July	00-0	900		00.	•14	.46	90.	90.	00.	3.	00.	1		•00
June	0000		20.	.25	00.	.12	00.	00.	00.	00.	00.	1		•04
May	5. 13	0000	77.7	00.	.72	00.	00.	00.	.18	.45	00.	1.13		.71
Apr.	0.75	30.00	1.00	.35	1.14	177	.31	00.	2.35	• 64	00.	.55		66.
Mer.	7.90	000	7011	12,50	1.40	2 15	1.75	59.9	10.83	1.19	.85	• 54		5,69
1. i. j. z.	08.80	00.00	0,10	2.04	5.35	6 51	200	3.72	00.	5.26		5.41		4.63
Jan,	5. 35.	000	1 20	20.00	86.3	60.0		6.10	00.	2,98	12.05	82		6,42
Dec.	ונו	4 C	.40	12,12	.38	2,45	0.00	.07	1.57	30.	. 55	5.19		2.69
MOW.	00		4.45	1.77	.26	.24	€8.9	.42	.25	.33	3.39	.22		1.65
Oct.	7 7 7	000	9	00.	4.58	1,51	.03	.78	2.24	1.38	00.	32.		1.08
Year	30 400 5	1004-001	: 90-4061	1906-07:	1507-08;	1908-09	1909-10	1910-11	1911-12;	1912-13:	1913-14:	1914-15:	••	Leans (a)

Seasonal average for 1C years. (a) Monthly average for period of record.

1			
			į
			ı
, 10	Manual R		
1			
	1101 123		1
; * ;			
7	1	۲	
-1			k
-1	,		
j			ě
1		742	
-			l
1			
1	1	1	3
1	ESSES BUILDING		
= 1			

SE JEAN

Table 39, continued

BIG BEAR LAKE DAM - Sec. 22, T. 2 N., R. 1 W., S. 3. M. 100 feet above the south end of Big Bear Lake Dam. Flevation 6800 feet.
Monthly, Seasonal and Average Amounts of Precipitation in Inches.

		••	••	••	••	••	٠.	•				٠, .					• .				• •					•••
Season	200	90.90	72.57	65.75	24.30	60.58	50.40	93.10	75.60	36.27	44.74	*25.52	48.93	11.13	33.63	20.17	12.94	21.98	32.93	23.59	42,10	24.95	43.05	49.40		
Sept.	8	8 6	00.	00.	1:10	. •58	2.05	3.00	•50	00	0	- 68	. O.5	70	.63	00	00	.85	00	. 18	2.51	00	1,00	40	00	1,55
Aug.	5	1000	1.00	1.70	• 50	2.20	1,15	1.90	3.20	.19	. 30	98	277	41		66	00	00	2.61	09.	00.	1.84	00.	1,65	55	1.10
July	S	8 8	000	09.	.•40	.10	00.	.20	• 50	00.	.31	52	00.	15	00	00.	00.	.65	.31	•05	00.	47	00.	.10	00.	.62
June	7.		•	00.	00.	00.	00.	00.	09.	1,50	00.	.18	60.	00.	00.	.03	09.	00.	00.	.33	.12	00.	00.	00.	.33	00.
May	3,12	., 45	04.	00.	• 50	.10	4.15	• 70	6.40	8.27	.18	. 95	.41	. 48	01.	3.37	30	3,49	.14	00.	.51	53	5,65	3.70	.25	1.25
Apr.	12.98	7.95	0 0	0.00 1.00	5.40	4.70	1.10	.10	5.20	.75	.53	.58	•76	86.	05	.35	1.19	3,85	.71	1.20	8.59	2.10	1.40	2.83	00.	1.00
Mar.	•	1.03		•	•	21.40	15.40	7.50	2.70	15.33	14.75	3.15	6.31	2.96	7.46	2.87	3.28	2.51	•29						13,65	3.40
Feb.	37.50	.10	2	000	11.90	06.	4.80	6.40	41.90	00.9	2.15	2.23	1,43	.61	10.93	1.23	2.70	.•62	10,19	3.81	6.51	6.03	15.44	3.31	4.50	• 1
Jan.	•	1.40		•	00.	17.90	1.75	16.80	00.	1.93	10.31	*6.35	16.94	2.26	8.55	4.44	3.96	1.52	8.48	4.92	4.77	1.30	7.60	5,65	12,65	10.10
Dec.	00.9	60.6	000	000	는 L		06.22	57.80	12.30	4.00	9.04	08**	21.67	.73		1.56	• 56	1.70	00.		3.30	00.	I.46	1.02	11.15	08.
Nov.	1.50	1.36	15.75	0 4 6	200	2.40	11.05	4.50	1.50	• 30	6.11	3.82	00.	2.45	1.60	.57	.35	2.74	26.5	•	3.84	00.	00.	4.60	3.70	62.
Oct.	00.	00.	255	000		4.40	.05	02.47	08.	00,	•15	1.28	. 50	00.	1.90	4.76	00	4.05	.23	2.68	00	.49	1.08	00.	•	0.40
ه اندرا			• •	•	••	·-	••	••	44	••		••	••	••	••	••	••	••	••	••		••	••	••	••	•-
Year	: 1883-84	: 1884-85	1885-86	. 1886-87	1987 68	100-1001	1000-00	: 1559-8	1890-91	: 1891 :	1892-93	: 1893-94	1894-95	: 1895-96	: 1896-97	1897-98	: I898-99	: 1899 - 00	: 1900-01	: 1901-02	: 1902-03	1000000	: 1904-05	1905-06	1002 08	00-1061

Table 39, continued

Big Bear Lake Dam (Continued).

Season	44.37	39.92	52,19	22.47	26.52	51.14	53.97	62.04	30.85	37.26	25.15	37.70	27.78	37.49	24.30	20.23	25.14	40.07	36,86	18,65	25.87	32.25	28.82	53.03	22,52	••	38.26
Sept.	00	00	3.00	00	00.	.45	.22	1.66	00.	.49	3,55	7.03	.63	E-1	1.14	09.	05.	00.	E-4	00.	. 70	E	1.22	00.	00.		09.
hug.	4.30	00	00	00.	2.79	•20	14.	•55	.16	1.23	. 32	0.05).22	06.1	.55	00.	•30	00.	00.	00.	1.18	₽	4.45	00.	₽		.87
July	0.80	.73	. 65	1.36	•58	625	•38	.23	.93	53	1.62	.15	•08	00.	•40	32	E-I	⊱⊣	.12	⊱⊣	00.	₽	⊱⊣	00•	• 40	i•42	,.27
June	:0.42	00	10	00.	1.63	00.	00.	00.	00•	1.50	00•	00•	00.	00•	E⊣	00•	3.50	00•	60°	00.	₽	00•	₽	. •35	.41	1.28	24
May	8	00	1.03	.72	.35	.21	3.27	. 58	00•	•64	.21	H	3,55	00.	₽	00	1.10	1.40	•28	1.52	00.	7.39	1.60	•30	1,62	00•	1.39
Apr.	00.	52	.34	2.50	.58	4.67	4.06	.73	3.74	.43	1.32	.82	1.50	1.55	3.08	3,55	4.00	17.23	1.98	.53	4.00	1.00	7.10	1,93	1.74	00.	2.72
Mar.	4.80	2.63	11.68	14,95	3.01	1.47	5.59	7.55	2.60	23.22	5.28	12,50	3,60	3.60	.93	10.08	4.90	1.55	3.85	2.21	4.10	9.02	90.	• 45	1.10	1.54	7.16
reb.	12.30	1.57	8.28	00.	9.93	10,83	21.06	3,88	5.86	6.25	5.98	14.92	2,50	7.48	7.00	00•	2,74	8.47	16.56	90.9	4.91	5.05	4.15	20,01	.15	1.57	7.40
Jan.	15.20	٠.	3	•	4.87		9.84	37.59	4.69	1.96	14	07.		9.56		00.	.40	•	1.80	•		9.60	•	•	11,53	•	7.47
Dec.	3.05	19.00	1.16	•	00.	4	8.28	8.29	7.38	00•	4.13	2.00	1.55	12.90	•	3.15	4.60	•	7.30	2.87	4.27	8.	00.	14.29	.2	16.25	5.68
Nov.	1.10		1.25	.3	.44	7.05	35	.98	.42	1.01	2.41	4.48	1.62	.70	1.70	1.60	1.30	2.54	4.26	.91	1.00	00.	5.26	5.50	,15	1.35	2.65
Oct.	2.40	. 25	.95	1,10	2.34	00.	.45	00.	5.07	00.	.19	2.05	1.83	.80	1.20	.93	1:90	4.70	.02	2.80	2.20	.19	2.00	1,20	.15	.52	1.52
Year	1908-09	, ,-	1-016	1911-12:	1912-13:	1913-14:	1914-15:	1915-16;	1916-17;	1917-18:	1918-19	1919-20:	: 12-0261	1921-22:	1922-23:	1923-24	1324-25:	1925-26:	1926-27:	1927-28:	1928-29	1929-30:	1930-31:	1931-32:	1932-33:	1933-34:	Means (a)

* Estimated (a) Monthly average for period of record. Seasonal average for 50 years.

THE PROPERTY OF THE PARTY OF TH 3 新名目 * 20 F - 54 所注 *子を記録されております。 APPERENT OF THE PROPERTY OF THE 381-12-5-31: BURGERS I-rangerus L septendicité EN BURECONSTITUTED REPERE . EEEE BEGGE CON GET THE BEGGE TENERS effektion filligetter fra ¥

Table 39, continued

BURTON RANCH - on West Fork of Mojave River. Sec. 4, T. 2 N., R.5 W., S. B. M. Elevation 4400 feet Approx. Monthly, Seasonal and Average amounts of Precipitation in Inches.

May June July Aug. S 5.31 0.00 0.00 0.00 0 6.82 .58 .00 .00 .00 .40 .00 .00 .00 .20 .00 .00 .30 .00 .00 .00 1.35 .00 .00 .00 1.09 1.13 .49 .17 .14 .40 .00 .00 3.10 .00 .00	47.36
May June July 6.82 5.31 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0	• 50
May June 5.31 0.00 6.82 .58 .00 .40 1.11 .00 .00 .20 .00 .20 .30 .00 1.35 .00 1.35 .00 1.4 .40 3.10 .00	20.
May 6.82 .00 1.11 .00 .35 1.09 .14	÷0.
	•25
Apr. 0.32 2.92 2.92 1.70 0.99 1.03 5.09 1.10 3.76 3.24	1.75
	1.84
Mer. 14.93 255.52 19.52 4.25 6.93 6.93 1.06 1.48 2.69	10.80
Feb. 13.31 5.06 7.20 8.88 16.83 16.83 15.19 .00 19.44 17.87	10.37
	13.25
2.53 15.08 1.21 3.85 10.95 1.97 1.97 2.30	4.52
7.60 6.40 .84 00 7.61 .75 .33 .60 5.62	3.00
0.00 .00 2.09 2.09 2.72 .91 .91 .98	1.30
	(a)
Year 1904-05 1905-06 1906-07 1907-08 1908-09 1909-10 1910-11 1911-12 1912-13 1913-14	Means (a)

(a) Monthly average for period of record. Seasonal average for 9 years.

PPREMARELL 15-11, 3 51.15 121 (1620) 8. [5] = [] [] [] [] [] . BELLEVILLE. 712711

Table 39, continued

CRAB PARK - N. E. Cor. Scc. 16, T. 2 N., R. 2 W., S. B. M. Elcv. 5800 feet. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

: uc		••	••
Season	!	1	
Sept.	00.00	;	
Aug.	0.00 0.30 0.00	1	
July Aug. Sept.	00.00	1	
Jan. Feh. Mar. Apr. May June	00.00	00.	
May	0.11	1.0222 .00	
Apr.	0.84	1.02	
Mar.	4.97	3.67	
Feb.	0.87	.30 T	
Jan.	တ	1.30	
Year : Oct. Nov. Dec.	15.27	.45	
Nov.	1	1.85	
Oct.	ł	0.00 1.85	
	•• ••	••	••
Year	894-95	96-9681	

DALY SUMMIT - Sec. 29, T. 2 N., R. 3 W., S. B. W. Elevation 5480 feet. Monthly, Seasonal and Iverage Amounts of Precipitation in Inches.

Season	52.63	
Se		
Sept.	0.52	
hug.	0.31 0.52 .04 .00 *.00 *.00	
July fug. Sept.	0.00 .00 .00	
Mey June	00.00	
	1.63	
Apr.	2.58	
Mar.	8.78	
Feb.	4.94	
Jan.	14.12	
Year : Oct. Nov. Dec.	20.16	
Nov.	0.00	
Oct.	0.38	
		••
Year	1893-94 1894-95 1895-96	

* Estimated.

27 * l l . AR . . . 100 000 2000 3 .

Table 39, continued

DREP CREEK - Center of Sec. 20, T. 2 N., R. 2 W., S. B. M. Elev. 5200 feet. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

Season		1 0	16.29	42.91	11,88	30 73	17 16	77 20	70.11	67.22	1	;	3		39 93	45 02	49.56	•	26.99	33 08	49.20	20 05	• 1	71.77	•	30.76
Sept.	ם ר	1.30	•43	•04	.07	28		90.	9 0	3	1	1		1	.32	90	88	1.75	36	E-	2,28		CC	00.		.45
· Sny	22.0		00.	•03	•78	23	55		8 8	3	1	-	1	{	•64	00	8	53	89	E-	00		.31	255) [.29
July	0.42	3 0	60.	00.	00•	00			8 6	•	1	-	1	1	00	95	00	00	.03	E	! [.61	000	00		.12
June		010	77.0	000	00.	.10	00	00		•			!	1	00.	00.	•24	00	.10	8	E	00.	.03	-20	00	60.
May	1	נסיר	100	.30	.28	.19	2.93	00	4.75	•			1	1	4.57	6.30	00.	1.43	00.	00	1.11	. 68	.72	3.18	2.56	1.67
vbr.	!	0.70		1.35		00.	.17	1.06	2.70				1	1	1.43	1.83	.76	1.76	.11	00.	.25	3.91	00.	98.	3.39	1.22
Mar.	1	2.75	. ה ה	1001	3.52	7.59	1.89	3.34	3.07	. [1		¦	;	8.91	21.57	15.58	1.97	4.65	3.04	13.31	13.89	2.09	.73	3.68	6.60
Feb.	1	1.89	25.6	07.7	02	12.51	1.10	1.65	.28	1	1		!	1	13.96	5.31	43		.27				78.7	18.27	1.22	5.30
Jan.	1	1.94	75 27	#T • C T	1.80	5.43	4.20	3.01	1.40	;	ł		!	1	7.32	3.84	10.92	10.97	15.09	14.23	21.08	00.	4.45	11.07	8.00	7.66
Dec.	!	3,35	רע אר	T#•0T	1.09	2.41	1.40	.49	2.03	-	1		!	!	1.16	1.07	12.77	.85	3.53	8.72	•54	1.86	•24	1.52	4.52	3.66
Nov.	1	1.96	00		C4+0	1.65	69.	.53	3.58	;	1		;	1	00.	4.99	4.86	• 78	1.30	6.54	1.19	00.	1.45	4.99	.25	2.08
Oct.	ţ	1,19	30		·00	2.28	3.92	00.	4.48	1	;		}	1	1.62	8	00•	5.46	1.87	90•	1.39	00.	2.00	00.	.27	1.38
	•• ••	••		•	••		••	••	••	••	••	1.		••	••	••		••	••	••	••		••	••	••	
Year	1892-93	: 1893-94	1894-45	00-100t .	08-0801 :	1896-97	: 1897-98	: 1898-99	: 1899-00	: 1900-01	: 1901-02	1902-02	. +000	: 1903-04	: 1904-05	: 1905-06	: 1906-07	: 1907-08	: 1508-09	1909-10	: 1910-11	: 1911-12	: 1912-13	7	: 1914-15	Means (a)

(a) Monthly average for period of record. Seasonal average for 17 years.

179 FEOR STILLINGS PARTED 1.82 11 12 11 12 11 12 11 .. e e (-2)-30

Table 39, continued

FLEMING'S WILL - Little Bear Valley at Mill. Sec. 15, T. 2 N., R. 3 W., S. B. M. Elevation 5010 feet.

Monthly, Seasonal and Average Amounts of Precipitation in Inches.

Season:	24.46 60.05 18.72 46.19 22.06 18.12 28.78	31.20	
Sept.	0.52 .00 .00 .30 .00	.16	
Lug.	00.31	.12	
July	0000 H 000	.01	
June	0.21 .00 .30 .30 .2.10	.37	
May	1.50 .62 .42 .16 .5.50 .7.09	2.22	
Apr.	0.81 1.95 2.07 .05 .45 1.19	1.43	
Mar.	3.85 10.40 6.33 16.76 3.04 5.40	7.18	
Feb.	2.69 3.33 0.04 14.46 1.56 2.70	3.60	
.Tan.	3.38 20.47 3.37 6.81 5.72 5.28	69.9	
Dec	7.11 22.90 2.40 2.36 1.35 1.35 3.22	5.71	
N.O.	1 "	1.91	
1	*1.49 .38 .00 2.63 4.34 4.34	1.91	
	Year : 1893-94 : 1895-96 : 1896-97 : 1897-98 : 1899-00 : 1899-00 : 1899-00 :	: (0)	i enis (a)

* Estimated same as Little Bear Valley at Gate House.

(a) Monthly and sensonal averages for 7 years.

40 8.0 , . -1-1-2 • . - 178745 MITTE . . 1. ...

Table 39, continued.

FORKS OF MOJAVE - Sec. 18, T. 3 N., R. 3 W., S. B. M. Elev. 3000 feet, approx. Monthly, Sensonal and Average Amounts of Precipitation in Inches.

_. .	••	••	••	••	••		••	••	••	••		••	••	••	••	••	••		
Serson		19.34		25.45	10,63				7.36	10.03	18.46	15,53	13.84	10.97	10.02	7.90	10.70		13.42
Sept.		00.00	00.	00.	.33	00.		1.04	00.	• 40	00.	₩0*	•05	00.	.21	00.	00*		.12
-gay		00.00	00.	00.	00.	1.54	00.	00	00.	2.29	00.	*.25	00.	• रहे	.47	.18	00°*		.32
July		00.00	.32	00.	.11	.23	00.	•05	00.	.50	8	00.*	00.	00.	00.	E-1	00.*		•08
June		00.00	00.	.11	00.	00.	00.	00	00.	00.	1.05	00.*	00.	00•	00.	00•	00•		.07
May		1.89	.67	00.	.25	00.	00.	E-I	7ª.	00.	.17	. 11	.12	00.	00.	90.	.18		.26
hpr.		0.32	.54	.15	.43	00.	£0°	.02	1.50	.17	1.04	69•	.16	.91	.02	-14			.38
Me.r.		6.87	7.93	7.91	.63	1.86	-74	1.75	3.50	.33	.39	.68	.76	.28	5.85	2.27	3.38		2.82
Feb.		6.11	1.78	1.73	2.84	1.96	-07	3.29	00.	3.87	7.16	4.73	.42	.89	3,18	1.56	3.67		2.70
Jan.		3.38	46	5,93	4.90	4.10	5.58	5.72	.19	2.11	6.45	5.28	9.58	3.46	.25	.02	.70		3,63
Dec.		0.77	25	5.81	.04	.91	6.21	.05	.52	00	.31	3.22	*1.50	3.40	00.	1.43	1.05		1.59
Nov.		00.00	3.28	3.81	90	00.	2.73	.21	.24	00	1,89	.23	* 89	00.	•04	.58	1.72		96.
Oct.		00.00		80	1.04	.67	00.	.51	O2	98	00.	00.	* 39	1.58	00.	1.72	00.		.45
Year:	•	1004-05	1005.06	1906-07	1902-08	1908-09	1909-10	1910-11 :	1911-12	1912-13	1913-14	1914-15	1915-16	1916-17	1917-18 :	1918-19	1919-20:	••	Weans (a)

* Estimated

Seasonal average for 16 years. (a) Monthly average for period of record.

77 66 . 7 . . .

(Cont'd.)

GATE HOUSE in Little Bear Valley, Sec. 10, T.2 N., R. 3 W., S. B. M. Elevation 5100 feet approx. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

Season:	42.63 :	22.37 :	48.13	13.41:	34.09	19.75 :	13.58 :	22.57 :	37.30 :	20.03	32.07	23.11	35.62	43.73 :	56.50	27.86 :	39.61 :	32.81 :	46.87 :	23.99	22.90	42.81	:	1	
Sept.	1.11	.52	00.	00.	•46	00.	20.	.22	00.	00.	1.38	00	•15	.53	8	1.20	Eન	•05	2.27	00.	80.	00.	:	;	00.
Aug.	0.10	.31	E-4	.23	•21	010	00.	00•	•67	00.	•56	.7	00.	8	00.	•04	•49	[-	8	•03	• 76	00.	1	1	.27
July	0,07	•04	00.	00•	00.	8.	00•	E	00.	000	00.	•50	00	•45	000	•30	00.	H	•05	.13	.31	00.	;	:	•10
June	90.	00.	00.	00•	• 20	00•	1.14	00.	00•	•17	00.	00•	8	.21	.61	00.	.10	8	E⊸	E	.50	•28	00.	ŧ	000
May	0.18	1.34	•24	-47	•15	4.56	.14	4.63	3.46	•26	.35	• 48	4.56	4.33	00.	1.17	20.	00.	•44	•36	1.13	•05	2.00	1	.79
Apr.	0.84	.62	1.31	1.72	•03	.75	1.13	3.11	•25	1.62	7.57	3.31	.93	2.41	.73	1.44	•07	.51	.41	3.96	1.07	2.74	3,45	;	1.82
Mar.	19.35	3.16	8.82	4.21	10.17	2.47	3.38	3,42	.54	7.39	6.92	10.59	8.94	22,99	17,89	1.36	3.54	1.33	12.31	15.78	2.38	10.1	2.22		1.38
Feb.	1.79	2.25	2.01	₽	12.05	1.38	2.30	•43	11.00	2.75	28.2	5.87	11.58	3.79	5.15	5.56	9.18	.49	8,65	.00•	9.65	16.37	10.03	•	4.25
Jan.	10.14	2.48	15.25		5.16	4.16	4.11	1,39	9.57	2.44	6.34	1.10	6.98	3,74	12.80	10.71	20.02	11.09	20.87	.33	4.11	19.10	8.52	-	3.21
Dec.	4.49	7.61	20.12	1.75	1.98	1.47	.74	1.75	00.	.22	2.59	00.	1.56	• 39	13.42	.58	2.66	13.19	.12	1.66	E⊸	1.39	4.07	1	1
Nov.	4.39	2,55	00	2.65	1.38	.76	.62	3.17	11,28	1.08	3,18	00.	00.	4.89	5.90	.36	•65	5.79	.88	.55	.85	1.87	.22	1	:
Oct.	0.17	1,49	.38	00	2.30	4.10	E	4.45	.53	4.10	.36	.55	.92	00.	00.	5.11	2.28	.36	06.	1.19	2.14	00.	1.08	;	1
VAAT :	1892-93	1893-94	1894-95 :	1895-96	1896-97	1897-98	1898-99	1899-00	1900-01	: 20-1061	1902-03	1903-04	1904-05:	1905-06	1506-07:	1907-08	1908-09	: 01-6061	1910-11	1911-12:	1912-13 :	1913-14:	1914-15 ;	1915-16:	1916-17 :

.

	6		-		19,	-		•		•	-	3	*	2	-	*	*	1	*	3	*	- 1	4.	10
	1.		11	٠. ا	1	•	2	-		-	100		1	-	50	1.	••	1					•	
			5,				-	9		12	8		٩	7		١.	8	h		f	٩			1
u					1								ı	\$	à	å		1						Ŀ
E					ř	_,			7				ń		i		g	8	ε	,	Ų	3	-	B
4,									2		•		3											r
in				-							P	F.			1	1				7		8	. !	1.
5 2																								
	•				7	. 4					ř					0.								
									1-	b-						,								Ŋ,
1:						¥	-			1		F.	* 1	•				04.	:	-				18
1				:												4				•				
1.		٠	à .		•			-			4		. :	-	•	-		8	*	-	4	•		
				:						•														i
1		. 2																			· .			
:				9				e					ı			3	1 14	pro s		1-0				
1	1									-			- "					-	-		-	-2		
	3		•-			بنؤ	•			•	. 3	•	- 3		•			. 3	-	-	-	- 7	C	
64 +	•		٠	• .		••			•		**	٠	•••		**	**	* *	-		٠	•		**	·· •
64 +	•		٠	• .		••			•		**	٠	•••		**	**	* *	-		٠	•		**	·· •
						4	•			•	91 G -	-	-	-: -:		97		The second second					-	
						4	•			•	91 G -	-	-	-: -:		97		The second second					-	·· •
						4	•			•	91 G -	-	-	-: -:		97		The second second					-	
						4	•		-	•	91 G -	1400 1401		7: 1		97		The second second					-	
						4	•		-	•	91 G -	1400 1401	-	7: 1		97		The second second					-	
						4	•		-	•	91 G -	1400 1401		7: 1		97		The second second					-	
						4	•		-	•	91 G -	1400 1401		7: 1		97		The second second					-	
						4	•				**	1400 1401		7: 1		97		The second second					-	
						4	•				**	70.00		7: 1		97		The second second					-	
						4	•				**	70.00		7: 1		97		The second second					-	
						4	•				**	70.00		7: 1		97		The second second					-	

Table 39, continued

Gate House in Little Bear Valley (Continued).

Season	•	34.67	20.47 :	1	1	58.05		1	1	37.54		18.78	28.60	22.77	20.82	36.77 :	32.18		•••	31.88
Sept.		00.	2.30	!	1	00.		i	60•	00	00.	00.	.62	.22	1,09	00	.02			.33
Aug.	t	.33	00.	i	1	00.		1	00	90.	00.	00.	.15	.13	.74	00.	.05			.16
July	(00.	00.	ł	1	00.	:	1	.01	•08	60*	00.	00.	.02	.30	00.	.02			.07
June	•	.42	00.	00•	1	00.	1	1	i	.01	•05	00.	.29	.56	00.	.31	.78			.15
Hay	C C	82.	00.	.70	ţ	1.08		1	;	.75	.54	1.20	.03	3,90	88.	.26	1.61	1.49		1.15
A.pr.	0	α•υ5	1.85	1.80	1	2.06	1	1	}	19,97	1.57	.57	4.30	.59	5.27	*3.21	1.60	0.10		2.45
Mar.	1 E	15.48	4.46	13.12	1	4.03	1	1	1	1.23	3.48	2.00	5.09	7.81	.58	.91	*.50	.14		90.9
Feb.		71.	3.27	11.12	1	9.45	1	!	:	7.94	20.32	5.82	5.86	2.64	2.85	*13.80	.17	4.81		5.94
Jan.	c c	20.0	00.	1.62	1	11,63		ŧ	;	2.16	1.93	1.77	4.68	6.90	2.66	*2.45	20.80	5.58		6.55
Dec.	0	T • O.	5.83	4.19	l	27.30		1	i	1.75	7.87	3.34	4.82	00.	00.	*10.16	6.56	14.47		4.52
Nov.	S	00.	2.90	3,62	-	. 65	*	!	1	.63	3.82	•36	1.52	00.	4.61	*4.43	00.	5.09		2.10
Oct.	C	00.	1.86	2.20	1	1.88	1	1	1	2.96	.01	3.72	1.25	00.	1.84	1.24	: 07	1.17		1.37
	••	••	••	••	••	••	••	••	••	••	••		••	••	••	••		**	••	0
Year	פר מוסו	DI-JIGI	1918-19	1:19-20	1920-21	: 1921-22	: 1922-23	1923-24	1924-25	1925-26	: 1926-27	: 1927-28	1928-29	1929-30	1930-31	1931-32	: 1932-33	1533-34		Means (a

* Estimated.

(a) Monthly average for period of record. Seasonal average for 33 years.

	7.12.50 (1.13 (1.11 F) 5
10	EST
ę	
	10 285 11 5 1 1 1 1 1 1 1 1 1 1
	7 7 1 1 1 2 2 1 1 2 4 3 8 2 4
0	
	-4-1,235:1111235:1
-	
<u>,</u>	ANTE ENTERINE PRODUCTION FOR
:	
•	

Table 39, continued

GRASS VALLEY in Grass Valley at Saw Mill. Sec. 17, T. 2 N., F. 3 W., S. M. Flev. 5190 feet.

Monthly, Sessonal and Average Amounts of Precipitation in Inches.

son:	**		57.56:	020	1		1						.51	56.77 :	. 94	58	. 64	. 68 :	•	.25		. 56		.57	
Season	2	i	57	19	i	İ	i	i	i	i		i	41	56	69	33.	36	25	55	25	25	54	'	38	
Sept.	(09.0	00•	00•*	;	-	1 1	!	1 1	;		00.	.57	•48	00.	1.75	-80	E٠	2.56	00.	00.	00.	i i	,•48	
Aug.	•	0.46	00.	00*	:	1	ł	ł	ŀ	1	1	i.	00.	00.	00.	8	.21	₽	00.	E-1	1.24	00.	1	,.15	
July		00.00	00.	00*	:		!	1 1	1	1	-	3	00.	00.	00•	.16	00•	00.	₽	00.	.48	00•	1	•05	
June		00.0	00.	00•	1	1	1	1	!	1	-	-	00.	98.	98.	00.	00.	00.	•05	00.	09.	•05	0	.18	
May		1.35	.59	•54	1	;	1	!	;	1	1	:	5.33	6.02	00.	00.	00.	00.	• 56	.48	.91	2.01	4.16	1.57	
bpr.		0.67	1.92	3.79	1	1	-	;	1	i i	1	1	98.	2.92	1.14	1.36	00.	.48	.57	•	1.22	2.26	•	1.67	
Mar.		2.87	10.13	4.92	1 1	3	1	1	1	1	1	1	10.12	29.27	22.00	•	3.18	2.00	16.60	16.13	1.92	1.11	1.73	8.83	
Feb.		1.24	3,39	₽	1		:	1	1 :	1	1	1	13.86	5.20	60.9	7.31	12,10	.39	17.32	00.	11.76	19.44	9.88	7.71	
Jan.	1	2.88	16.65	•	1	1	1	1	1.	1	1	8	7.76		21,00	14.68	15.15		16.50	.13	4.18	21.88	2.73	10.30	
Dec.		8.19	24.59	2.32	1	;	:	;	1 1	:	-		1.62	.47	16.70	1.06	2.40	5.59	.16	2.32	.15	1.47	2.67	5,19	
Nov.		1	00.00	3.26	ŧ	i	-	;	1	1	1		00.	00-9	2.15	.30	.55	60.9	.50	.50	1.10	6.34	.31	2.08	
Oct.		ŀ	0.29	00.	1	1	;	1 2	ļ	1	ŀ		1.39	00.	00.	5.20	2.25	.25	.42	1.01	2.10	00.	1.25	1.09	
		***	••		1.	••			••										۰۰ ۰۰	••			. 2	(a)	
Year		1895-94	1894-95	1895-96	1896-97	1897-98	1898-99	1899-00	1900-01	1901-02	1902-03	1903-04	1904-05	1905-06	1966-07	1907-08	1908-09	1909-10	1910-11	1911-12	1912-13	1913-14	1914-15	Means (

Seasonal average for 12 years. *Estimated. (a) Monthly averages for period of record.

900																
																To the second
							: 1				V.	1	7		ę	
.:	•															
		:		3												
-										3			=	4.0		H
		-														
	٠	1														
7		4.					:	! !	-	1	1	:			!	

the second secon

Table 39, continued

GREEN VALLEY in Green Valley at Toll House. Sec. 23, T.2 N., R 2 W., S. B. M.

Monthly, Seasonal and Average Amounts of Precipitation in Inches. Elev. 6970 feet.

Season		20.08 50.01 18.49	
Sept.		2.31 .15 .00 *.00	
hug.		* 000	
July		00.00	
June		0.05	
Мау		1.19	
Apr.	-	0.75	
Mar.		3.94 9.24 6.57	
Feb.	20.4	2.01 1.94	
Ton	O CALL	2.18 14.38 2.92	
Dog. Tan.	nec	5.83 21.64 1.40	
10	Nov	2.33	-
	Oct.	1.06	
	Year :	897-93 : 893-94 : 894-95 : 895-96 :	

* Estimated.

HEAP'S PEAK - N. E. Cor. Sec. 25, T. 2 N., R. 3 W., S. B. M. Elev. 6400 feet approx.

Monthly, Seasoral and Iverage Amounts of Precipitation in Inches

July Lug. Sept. Season:		*.00 0.00 0.00 57.76 : *.00 *.00 *0.00 18.89 :	
May June		1.04 0.00 .68 .00	
Men	P. C.	1.04	
	7-51	2.01	
1/2.3	Ear . pr	9.16	
- !	ren.	4.84	
	Jan.	3.55	
	Dec.	20.62	
	Nov.	4.43	
	Oct.	0.00 4.43	
	Year : Oct. Nov. Dec.	1894-95 :	

* Estimated.

the life dit a report

		2660	(2000)
9.8		y FEE	
°c		1824	7
		1212	
•	1 1 1	85.15	-
	W 33 1	1251	100
n •	1 21		N
7,5	H 455	STE	
ŝĒ	1	TEE	d e dia
	M - 1	RES	100
		321	1
1 1 4 >	N 7 = 8	3-11	
		1721	F
Tr.			

20

Table 39, continued

HELENDALE

Monthly, Seasonal and Average Amounts of Precipitation in Inches.

Season	6.49		5.61	5.54	1.32	3.83	3.80	4.60
Sept.	0.03	00.	00.	.32	00.	00.	*1.00	.19
· Bny	00.00	• 48	00.	• 43	00.	00.	00 *	.13
July	00.00	00.	00.	00.	90.	00.	**00	.01
June	00.00	00.	00•	00.	00•	00.	00.	00.
May	0.43	.34	00.	00.	00.	00.	00.	.11
Apr.	0.38	69.	00.	,10	00.	00.	00.	.17
Mar.	2,10	.81	09.	.11	•05	.30	00.	.57
Feb.	1.94	.76	.67	1.22	•03	00.	. 82	.78
Jan.	1,30	.75	1.34	1.74	.57	1.18	06.	1.11
Dec.	0.31	00.	2.00	00.	.19	1.23	00•	.53
Nov.	00.0*	1.78	1.00	00.	00.	1.12	00.	.55
Oct.	*00.00	00.	00.	1.62	.42	00.	1.08	•44
	••	••	••	••	••		••	
Year	1904-00	90-306	70-906	80-1061	60-8061	1909-10	11-0161	Means (a

*Estimated

(a) Monthly and Seasonal everage for 7 years.

The second of the same of the

1		
	,	Phy.
	1	13
15		
129		
10	5 to 2 1 1 1 1	
11		H
		H
13	PARTE	den.
, ,	1325	
i i		
100	14007724	
1	1415111	
•		110

Table 39, continued

HESPERIA - Rlev. 3190 feet approx.

Monthly, Seasonal and Average Amounts of Precipitation in Inches.

••												٠.		
Season	12.42			8.17		7.99	9.50		1 K	10.85			8,38	
Sept.	00-0	00	00	.15	•05	00.	2.31	00	00.				.25	
Aug.	00.00	00	00	.25	.95	00.	00	00	4.5	00	1		.16	
July	00.00	• 02	00	00.	00.	00.	•04	000	.74	00	1		80.	
June	00.00	00.	00.	00.	00.	00	00.	00.	00	.11	00.		.01	
May	1,07	.07	00.	90.	00.	00.	00.	• 30	90.	60.	.11		.15	
Apr.	0.08	.28	00.	00.	00.	00.	90.	. 84	00.	.93	.45		.24	
Mar.	4.65	1.10	3.21	.32	1:19	.78	1.45	4.58	.29	.12	.42		1.65	
Feb.	3.97	-24	1.55	2.29	.80	00.	2.47	00.	1.98	3.34	2.12		1.70	
Jan.	2.07	.25	3,15	3.02	1.42	.42	3.18	.05	09.	4.77	3.26		2.02	
Dec.	0.58	90.	1.36	00.	•40	5.77	00.	,16	00.	.32	2.29		1.06	
Nov.	*0.00	2.78	4.65	90.	00.	1.02	00.	00.	•26	1.10	.23		26.	
Oct.	*00.00	00.	00.	2.02	1.00	00.	.05	60.	00.	.07	• 68		.36	
		40	••	••		••	••	••	••	••	••	**		١
Year	1904-05	1905-06	1906-07	1907-08	1908-09	1909+10	1910-11	1911-12	1912-13	1913-14	1914-15		Merns (a)	

* Estimated

Seasonal average for 10 years. (a) Monthly average for period of record.

	WINDS THE	
	A PARTIE NAMED IN A PARTY NAMED IN	H
-	·	
	- • • • • • • • • • • • • • • • • • • •	
-		
	SETTE ALLIE	
•		
143		
M	12 1. 217	7-1
3		13
		Į.
2	TERREPUEL	1-
1		
•		

The same of the sa

Table 39, continued

HOLCOMB CREEK at Holcomb Creek Station. N. E. Corner Sec. 10, T. 2 N., R. 2 W., S. B. M. Elev. 5250 feet approx.

Monthly, Seasonal and Average Amounts of Precipitation in Inches.

Season:	••	;	12.60:	32.79 :	9.19 :	20.23 :	11.60	6.47 :		:		-	;	28.61 :	30.98	33.27 :	22.83	24.96 :	26.05:	29.43 :	17.26 :	16.53	32.07 :	:	••	22.18
Sept.		1.49	•48	00.	• 35	• 38	00.	.17	1	1	}	:	8	•03	.12	00.	.78	.27	H	00.	00.	00.	8.	1		•23
Aug.		0.58	•86	.49	.47	.51	99.	00.	1 1	1	1	;	1	.39	.83	00.	.49	2.02	₽	00.	00.	3.76	09.	1		69•
July		0.50	•03	00.	00.	00.	00.	00.	1	1	1	;	-	00.	.85	00.	1.04	00.	.27	•03	• 50	1.20	00.	1		•26
June		1	0.03	00.	00.	00.	00.	.18	00.	1	;	;	1	00.	00.	•10	00.	.23	00.	₽	00.	.70	.29	00.		60°
May		1	0.79	.01	.25	.11	1.46	00.	1.20	1	1	;	;	2.47	1.34	00.	.51	00.	80.	.33	.78	.30	2.99	1.26		.77
hpr.		0.41	.40	.62	1.02	00.	.10	.53	2.08	!	.	;	1	.73	1.59	.33	.98	•04	00.	.15	2.36	00.	.65	2.07		.74
Mar.		9.12	1.70	4.86	3.24	_	1.27	1.35	1.90	!	• }	1	.1	8.06	16.43	11.33	1.13		29.2	7.69	9.61	1.16	.47	2.24		4.78
Feb.		0.44	06.	.61	Ľ	7.89	.52	1,30	.35	1	.	:	. !	69.6	2.47	1.39	4.96	4.51	.24	4.16	00.	5.35	5,65	14.47		3.42
Jan.		5.52	87	10.06	1.56	3,35	3.05	1.89	.63	1	- 1	-	1	4,64	1.63	8.10	8.24	9,22	12.91	14.71	00.	2.37	17.04	6.56		5.91
Dec.		1.52	3.66	15,69	.41	1.82	.81	.48	1.00	1	1	:	1 1	1.27	1.04	12.02	.17	3.08	5.13	•54	1.35	60.	:95	3.72		2.88
Nov.		1.62	2.23	80.	1,89	1.05	.41	•57	3.48	;	-	:	.1	00.	4.68	00.	,24	1.08	4.88	86.	•14	• 48	3,43	.22		1.44
Oct.		-	0.65	.45	00.	1.70	3.32	00.	2.95	1	1	-	1	1.33	00.	00.	4.29	1.30	00.	•84	2.52	1.12	00.	.73		1.18
	••	••	••	••	••	••	••	41	••	••	••		••	••	••	••		••	••	••	••		••	••	••	_
Year		1892-93	1853-94	1894-95	1895-96	1896-97	1897-98	1898-99	1899-00	1900-01	: 1901-02	1902-03	1903-04	1904-05	1905-06	1906-07	1907-00	1968-00	1909-10	11-0161 :	1911-12	1912-13	1913-14	1914-15		Weans (a

Seasonal average for 16 years. (a) Monthly averages for period of record.

the state of the s

.

	TER THE SEATON CONTRACTOR	100
٠	48389 - ENVESTRE	
Total .	1 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	3.416
2 D		1
*		1
Mal		
		-
	SAME DESCRIPTION DESCRIPTION	
٠,	SEAFINGWIND TO THE STREET	
) 		• ,

The second secon

and that will have been a possible and the latest a

Table 39, continued

B. M. HOLCOMB CREEK, UPPFR, in Holcomb Valley. Sec. 31, T. 3 N., R. 1 E., S. Elev. 7250 feet approx.

Monthly, Seasonal and Average Amounts of Precipitation in Inches.

u u	••	••	ى 						••	
Season		1	15.9	22.3	9.3	13.60	10.4	6.4		13.00
Sept.		00.00	.80	00•	.50	09.	00•	00 *		.31
Aug.		0.50	06.	• 30	2.30	1.00	• 70	000*		.87
July		0.50	09.	00.	.20	1.10	.10	00 *		.36
June		00.00	00•	00.	00•	8	00.	00.		00.
May		0.20	.40	00.	.20	.20	90	00.		.29
Apr.		1	00.0	.10	.50	00.	.50	09.		.29
Mar		1	2.25	1.90	3.50	1.30	1.50	2.00		2.08
Feb.		1	1.75	.50	00.	3.70	.40	1.10		1.24
Jan.		;	1.00	6.90	1.00	3.30		1.50		2.72
Dec.		1	4.50	12.30	.20	06.	08	1.00		3.30
Nov.		1	3,75	00.	06.	• 50	.40	• 20		96*
Oct.		1	00.00	.30	00.	1.00	2.40	00.		.62
	••	••	••	••	••	••		••	••	~
Year		1892-93	1893-94	1894-95	1895-96	1896-97	1837-58	1898-99		Means (a

HUSTON FLAT at Huston Flat. Sec. 23, T. 2 N., R. 4 W., S. B. M. Elevation 4550 feet.

Monthly, Seasonal and Average Amounts of Precipitation in Inches.

••		••	**	••
Season	1	48.50	I I	
Sept.	0.38	00.	}	
Aug.	0,50	00.	1	
July	00.00	00.	1	
June	ł	00:00	00•	
May	}	1.18	.81	
Apr.	;	2.77	1.63	
Jan. Feb. Mar. Apr. May June July Aug.	;	3.47 11.84	6.43	
Feb.	1	3.47	90.	
	}	17.97	4.10	
. Oct. Nov. Dec.	:	10.97	2.35	
Nov.	;	00.00	4.31	
Oct.	;	0.30	00.	
••	** **	••	••	••
Year	1893-94	1894-95	1895-96	

^{*} Estimated. (a) Monthly averages for period of record. Seasonal average for 6 years.

THE REST IN STREET STREET, STR

STEDRIST COL

181			11/2011	
4889			20000	0.00
1815		, 13	1.0111	
188		1		
		2 1	14 19 19	8 (1)
#81 W	The same of			
		,	1111111	1
121 14	1 17	7 1-	LIKER	\$.
351				,
10			1444	1 14
151		The same of the sa	BB	
		10 17 17 17 17 17 17 17 17 17 17 17 17 17	29 822	1 11
		37	THE REAL	1 4
		1	· · · · · · · · · · · · · · · · · · ·	1

Table 39, continued

KUFFELS - N. W. Cor. Sec. 26, T. 2 N., R. 3 W., S. B. M. Elev. 5520 feet. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

g					j
Season		;	;	1	
Sept.		0.85	00.		
Aug			00.		
July		00.00	00.	Į Į	
June		00.00	8.	00.	
May		₽	1.48	.70	
Apr.		0.70	2.37	2.85	
Mar.		1,65	11,39	6.23	
Feb.		1.25	5.86	.14	
Jan.		1.88	18.97	4.35	
oct. Nov. Dec. Jan.		3,35	24.68	3.20	
Nov.		;	i I	0.00 4.34	
Oct.		1	î î	00.00	
	••	••	••	••	••
		1893-94	1894-95	1835-96	

Trum 27 Cambra

Table 39, continued

Corner Sec. 29, T. 3 N., R. 4 W., S. B. M. Elevation 3200 feet, approx. Monthly, Seasonal and Average Amounts of Precipitation in Inches. LOS FLOPES RANCH - S. W.

Nov. Dec. Jan. Feb. Mar. Apr. May. - 10.11 0.01 .80 0.05 0.00 0.41 0.09 11.80 5.35 5.15 .00 .00		2000
0.11 0.01 .80 0.05 0.00 11.80 5.35 5.15 .00 .00 		
0.41 0.09 11.80 5.35 5.15 .00 .00	00.0 0.00 00.0	
0.41 0.09 II.00 5.55 6.02 0.41	:	**
.17 .00 3.55 6.02 0.41	000	
.17 .00 3.55 5.02 U.T.	1 1	
		••

BURCHAM RANCH - S. W. Corner Sec. 29, T. 3 N., R. 4 W., S. B. M. Elev. 3200 feet, approx. (Probably same as Los Flores R nch.) Wonthly, Seasonal and Average Amounts of Precipitation in Inches.

Season:	24.94:	
Jan. Feb. Mar. Apr. May June July Aur. Sept.	0.00	
· jnir	0.00	
July	00°0	
June	90.0	
May	0.82 1.83	
Apr.	0.82	
Mar.	12,19	
Feb.	4.55 9.57 12:19 1.27 2.16 15.42	
Jan.	4.55	
Dec.	0.92	
Nov. Dec.	3.08	
Oct. N	00.00	
Year :	1904-05	••

STATE OF THE STATE

	3.	1773
	*	
Få	h	1818
3%		1818 4
1		1138 4
27		1138 6
n * {		; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ; ;
. 1		151
		- 1 - by 10.
= .		144=
		3121
31		315
_ 1		
* 1		Ī.I.Ī.

Table 39, continued

MEASOR'S - N. W. Cor. Sec. 27, T. 2 N., R. 3 W., S. B. M. Elev. 5480 feet. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

Season	
Se	
Sept.	0.00
• any	00.0 00.0 00.0
July	00.0
June	00.00
May	1.69
Apr.	2.47
Mar. Apr. May June July hug. Sept.	11.54
Feb.	5.63
Jan.	19.21
Year : Cct. Nov. Dec. Jan.	23.87
Nov.	3.14
Oct.	00.0
Year	1894-95 1895-96

MORSE'S - S. $\frac{1}{2}$, Sec. 20, T. 2 N., R. 3 W., S. B. M. Elevation 5350 feet. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

	•• ••	••	••	••	••		••	••	••	••	 	••	••	••			••	••	••	••
Season	1	38.35	68.05	25.20	55,19	32.31	25.27	35.91	60.23	35.14	57,46	22.19	53.49	76.12	87,45	42,79	71.67	48,50	69.78	40.07
Sept	0.25	.67	00•	00•	• 73	00.	E=4	.85	00.	00.	1,38	00.	09.	.80	00•	00.	1.84	00.	3.00	00.
J.ug.	00.00	•74	•03	•46	.12	.13	00.	00.	85	00.	•56	.27	00.	00•	00•	.01	90•	00•	00.	.25
July	0.07	•05	00.	00•	00.	80.	00.	₽	00•	00.	00.	•02	00.	00•	00•	00.	00.	00.	00.	00.
June	00.00	09•	00.	00•	• 40	00.	2.73	00.	00•	.12	00•	00.	00.	•28	1.45	00.	.17	00.	00.	00
May	0.04	2.08	1.48	.89	.18	8.27	.55	8.64	5.06	.63	1.28	• 48	6.58	7.69	00.	2.75	.10	00.	1.54	1,13
Apr.	1,55	.63	2.91	2.63	.15	.70	1.37	5.81	.36	1.32	15.35	3.31	1.53	4.96	1.88	3.70	1.84	96.	1.41	8.34
Mar.	31,35	2.00	12.54	7.90	15.61	4.22	7.99	3,83	1,26	13.32	11.46	10.59	12,75	36.72	29.36	3.05	6.38	4.93	22.47	23.09
Feb.	6.64	3.93	5,85	•08	20,14	2.96	3,23	.44	18,39	5.25	6.50	5.87	17.77	9.17	7.22		16,87	2,38	19,98	00.
Jan.	16.44	4.7.8	18,00	5.95	9.34	6.37	7.04	2.20	14.49	5.26	9.65	1.10	10.08	8.32	21.75	13.16	35.61	18,33	17.38	2.33
Dec.	;	14.73	26.77	3,11	2.73	1.85	1.28	5.17	8.	.50	5.18	00.	2.47	86	20.57	2.29	3.90	15.60	.43	1.78
Nov.	1	2,75	00.	4.18	1.96	2.65	.74	4.38	19.58	1.63	5.10	00.	00.	7.20	5.22	.47	06.	5.67	2.13	1,60
(ct.	;	2.42	.47	00.	5.83	5.08	.34	4.59	.24	7.11	1.00	.55	1.71	00.	00.	6.63	4.00	.63	1.44	1.55
Year :	1892-93 :	1893-94 :	1894-95 :	1895-96 :	1896-97:	1897-98	1896-99 :	: 00-6631	: 10-0061	1901-02:	1902-03:	1903-04:	1904-05:	1905-06:	1906-07:	1907-08:	: 60-8061	: 01-6061	1910-11:	1911-12

THE RESIDENCE IN MELLER SIN DE - SEELL NAME OF THE PERSON OF THE PERS 40 1112 TO SKIESKEN FRES ₹ .**!** CONTRACTOR OF CHARLES e de la company -1 1 1

Table 39, continued

$\overline{}$
7
inne
W
~
-
C
•
13
45
Con
\sim
v
rn
_
\sim
S
V.1
-
-
0
S
Mor
~
U
-

Season	38,30	75.21	•	1	1	1		50.41
Sept.	00.	00.	i	1	00.	i		• 44
·Bn:j	.32	00•	;	1	00.	1		.17
July	.32	00.	1.	1	00.	;		•02
June	1.32	1.20	00.	1	00.	00.		• 33
May	1.71	3,94	10.26	1	3.55	• 50		2.77
hpr.	2.21	3.37	3.86	. 1	3.51	1.32		3.00
Mar.	12.12	4.42	3.43	1	3:17	25.18		12,49
Feb.	7.41	22.54		1	1	9.25		9.47
Jan.	7.54	28.93	.76		13.61	1.72		11.21
Dec.	.28	2,66	10.93	!	1	;		5.60
Nov.	2.12	8,15	.28	1	:	2.10		3.43
Dot.	2.95	00.	1.83	1	1	00.		2.01
Year	1912-13 :	913-14 :	1914-15 :	915-16 :	916-17 ;	317-18 :	••	Weans (a)

(a) Monthly average for period of record. Seasonal average for 21 years.

RIDGE - Center of Sction 18, T. 2 N., R. 3 W., S. B. M. Elev. 5550 feet. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

on	44	47 :	47 :	
Season	20.	39.47	12.	
Sept.	0.60	00.	000*	
Aug.	0.46	00.	000*	
July	00.00	00•	00 *	
June	0.13	00.	000	
May	1.35	•24	.35	
Apr.	0.67	1.33	1,39	
Mar.	2.87	7.21	3.71	
Feb.	1.24	1.93	Ę~i	
Jan.	2.86	11.46	2.36	
Dec.	7.56	17.01	1.40	
Year . Oct. Nov. Dec. Jan.	2.70	00.	3.26	
Oct.	;	0.29	00.	
1.		••	Çı.	••
Year	1893-94	1894-95	1895-96	

* stimated.

11112 10% 21177 r 315 1 1 1 1 1-1 • pad

Table 39, continued

QUIRREL INN - Sec. 25, T. 2 M., R. 4 W., S. B. M. Elev. 5280 feet. Monthly, Seasonal and Average Amounts of Precipitation in Inches. SQUIRREL INN - Sec. 25,

																							••			
Season		1 1	30,67	49.84	18,30	40.74	24.19	22.62	1	+	1		1	-	1	1	;	1	1	55,24	30.15	30,46	58.54	45.20	77.59	39.81
Sept.		0.38	•50	00•	00.	•05	00.	00•	1	1	1		;	00	1	;	1	;	₽	3.44	00•	T	€⊸	.58	1.51	000
Aug.		00.0	• 62	00.	.38	•05	00.	00.	1	1	1	1:	1	00.	1	1	1	;	00.	00.	.31	•08	00.	1.05	.10	00.
July		0.25	00•	00.	00•	00.	00.	00.	!	1	;	;	1	00.	;	1	:	ł	H	E	₽	.49	00.	00.	00.	H
June	(00.0	.33	00.	00.	• 20	00.	2.50	00•	1	1	:	1	00.	1	1	;	;	E-1	00.	00.	1.13	• 78	€⊣	00•	00.
May	,	01.0	1.37	1.14	.89	15	6.48	86.	6.37	1	1 1	1	1	2.79	i	1	1	1	00.	1.75	1.11	1.35	.26	5.12	1.57	3.83
Apr.	;	1.34	1.17	2.53	1.66	.13	.68	. 83	4.81	;	1	1	1	1.10	;	1	1	!	.48	1,26	6.51	1.13	69.9	6.85	1.25	3.91
Mar.		20.61	3.54	9.58	5,60	12,17	2.99	7.95	3.04	i	1	1	;	9,40	23,48	;	:	1	4.55	10.93	15.75	4.47	2.73	3,36	5.28	3.01
Feb.	i d	5.95	3.23	5.35	80.	13.31	1.60	2.84	.26	1	4		1	11.04	6.84	1	-	-	.76	11.61	₽	12.97	16.29	13,38	6.77	10.65
Jan.	0	12.02	4.00	14.22	4.51	7.65	4.98	5.10	1.73	;	1	1	1	9.80	5.87	:	•	1 1	8.45	20.85	.62	4.61	20.83	6.46	50.29	2.99
Dec.		!	8.93	16.38	1.98	2.23	1.39	1.35	4.06	1	1	1	1	;	1.45	:	;	1	18.50	.52	3.12	00.	3.13	5.78	7.88	8.18
Nov.		!	5.08	00.	3.20	1.60	2.05	.70	3.49	1		1	;	;	2.33	1	1	1	9.20	2.19	1.50	1.91	7.70	.27	2.94	.70
Oct.		-	1.90	.34	00.	3.20	4.02	.37	3.56	1	-	1	1	;	00.	;	-	1	;	5.69	1.23	2.32	.13	2.35	00.	6.54
••	••	••	••	••	••	••		••	**	••	••	••	••	••	••	••	••	••	••	••	••	••	••	••	••	••
Year		1892-93	1893-94	1894-95	1895-96	1896-97	1897-98	1898-99	1899-00	1900-01	1901-02	1902-03	1903-04	1904-05	1905-06	1906-07	1907-08	1900-00	1909-10	1910-11	1911-12	1912-13	1913-14	1914-15	1915-16	1916-17

(Continued)

	1
· · · · · · · · · · · · · · · · · · ·	A THE
SERRICH COLORS OF STREET	
	manufacture de reproductive
	-
E8454541184111184111	

The other was a second to the
Table 39, continued

•
Continued)
Inn (
quirrel
igui

Season			31.40	33,15	47.26	77.28	40.36	27.32	34.91	45.13	48.68	16.39	36.00	35.57	30.29	54.31	27.68			39.48
Sept.	[۲,۰	4.05	•20	1.31	€	1.10	00.	.10	00•	00.	00	.61	.21	1.00	00	205	<u>;</u>		49
I ug.	27		• 20	00.	€⊣	00.	00.	00.	00•	00.	00.	00.	.85	€⊣	.52	00	0.4			14
July	€	- 1	E⊣	€⊣	⊱	5.01	00.	00.	00.	00.	00.	00.	00.	EH	[1	000	.13	00.		.18
June	E-	- (00.	00•	00•	00.	00	00•	3.20	00•	00.	00.	•14	00•	•05	:.22	80	1.31		•31
May	.78	- [• 30	2.34	9.88	3.05	.07	00.	1.12	•74	1.00	1.76		7.64	1.69	€⊣	2.24	.10		2.01
Apr.	1.76	- (1.26	2.36	2.87	2.97	6.85	4.37	8.05	21.24	1.00	90.	5.26	2.26	7.87	1.53	1.25	00.		3.34
Mar.					9.79		3,31	13,00	6.17	•20	8.80	2.56	5.37	9.14	09.	.42	.40	• 07		7.18
Feb.	8,88) (6.95	8.53	3,69	13.02	2,38	.15	2.46	11.10	24.30	5.26	10.16	2.51	6.78	22.97	.08	4.34		7.27
Jan.	64		29.	•36	10.33	-		2.30	• 50	88	3.25	.70	6.82	13.81	•	5.63	•	6.20		8.00
Dec.	00		20.5	3.71	2.11	30.70	12,75	2.87	5.80	2.50	5.36	2.00	5.64	00.	00.	12,55	60.9	14.91		5.92
Nov.	1.40		4•8O	2.96	1.38	1.09	4.90	3.23	4.45	2.50	4.97	• 40	.85	00.	6.29	8.62	£-I	1.01		2.84
Oct.	00.	000	3.20	.13	2.90	5.69	1.31	1.40	3.06	2.97	T	3.65	•30	E-1	1,35	2.37	C.12	1.35		1.92
	•• •		••	••	••	••	••	••	••	••	••	••	••	••	••	••	••	••	••	
Year	1917-18	טר טרטר	1918-19	1919-20	1520-21	1921-22	: 1922-23	1923-24	1924-25	1925-26	1926-27	1927-28	1928-29	1929-30	1930-31	1931-32	1932-33	1933-34		Means (a)

Records from Jan. 1893 to Mar. 1906 by Arrowhead Reservoir and Power Company; Records from Nov. 1909 to July 1934 by United States Weather Bureau. Note:

(a) Monthly average for period of record. Sessonal average for 29 years.

1			
		200000000000000000000000000000000000000	
11	-	102 10 1112 2-272	
111	-	THE PROPERTY -	100
The same of the sa			
		- COLUMN HISTORY	
		A PRESENTATION OF THE PERSON O	
		MELLER SELECTION OF THE PERSON	
131		STREET, STREET	
7 19	ě	THE SECTION OF SEC.	0
The second secon		SAN THE PERSON	
		COLUMN TO STREET	

Table 39, continued

Elev. 5700 feet. STRAWBER MY FLAT - S 2 Sec. 19, T. 2 N., R. 3 W., S. B. M. Elev. 570. Honthly, Scasonal and Average Anounts of Precipitation in Inches.

Season	;	59.76	18.36	
Sopt.	0.38	00	* 0.0	
July Aug.	0.50	0	>00° *	
	00.00	00	⊙o• *	
June	0.00	00.	00.	
May	1.92	1.08	.91	
Lpr.	0.76	2.63	2.23	
Mar.	4.17	10.61	6.43	
Feb.	S3.7	2,62	÷08	
Jan.	1	19.05	2,59	
: Oct. Nov. Dec. Jan.	ļ	23.47	2.23	
Nov	;	0		
Oct.	1	0.30	90.	
	••	••	••	••
Year	53-94	1894-95	96-5681	

* Estimated

SUMMIT NO. 2 - 1/8 mile north of S. 3 Cor. Sec. 20, T. 3 N., R. 5 W., S. B. M. Elev. 3823 feet. Monthly, Seasonel and Average Amounts of Precipitation in Inches.

٠.		••	•		• •			٠.			• •	٠,٠	٠.	• •	
Season		!	16.75	34.28	17.33	13,43	18.26	;	1	ļ	}	19.40	• 1		19.91
Sept.		0.05	0.5	00	6-2	00.	00	1	;	;	00	00	1		• 05
Aug.		00.00	3	00•	00	1.10	000	ļ	1	!	00	30			.17
July		000	\$0.5	00.	08.	00.	00	1	ł	1	00.	00	1		.22
Junc		00.00	00.	01.	00.	00.	00	00.	:	1	00•	00.	1		•01
May		2.13	• 70	00.	.17	00.	00.	00	1	:	00.	00.	ł		.33
Apr.	1	• 38	66*	00.	.35	00.	.05	00.	ł	ł	1.10	1.15	ł		•45
160 r.		8.96	80.8	10.11	09.	2.27	1.46	4.17	ł	1	.40	.70	;		4.08
Feb.		G.4€O	1.45	3.07	3.78	84°4	30°	4.98	;	1	9.70	5.10	ł		4.56
Jrn.		4.04	6)? (C)	° 03	8,11	3.03	7.43	6.42	1	1	7.71	7.30	;		5.97
Dec.		CT • T	.16	7.57	• 1&	1.84	7.50	00.	1	i	:	4.35	2.40		2,83
Nov.		1	4.50	%• 6C		00.	1.39	• 50	:	1	1	.30	.02		1.43
Oct.		;	00.00	00.	2.87	.70	00.	1.78	1	1	1	02.	00.		69*
		• •	••	••	••		••	••	••	••		••	••	••	
Year	30 . OO [120±+021	1905-06	1906-07	1807-08	1908-09	1:09-10	1910-11	1911-12	1912-13	1913-14	1914-15	1915-16		Weans (a

Monthly average for period of record. Seasonal average for 6 years. Records for 1914 and 1915 by United States Weather Bureau. Note: (a)

Table 39, continued

TALLW DOI - Upper End of Little Bear Valley. Sec. 16, T. 2 N., R. 3 W., S. B. M. Elev. 5030 feet. Monthly, Seasonal and /verage /mounts of Precipitation in Inches.

1 1 1 1	2.73	040 F	0 4 8 6 1 2 0 0 0	27.64 19.55 3.11 4.66 2.72 8.03	
	2.73	_		19.55 4.64 8.09 16.53	27.64 19.55 3.11 4.64 2.72 8.09 1
2.27	L	•		4.64 8.09 6.51	3.11 4.64 2.72 8.09
	.00			8.09 6.51	2.72 8.09
	16.99			6.51	וקא אין ו
	2.21	ı	į		TC.O 01.1
1.30	2.94		6.71		• 68
4.65 4.06 7.94	• 54		2.03	3.70 2.03	
7.95 1.83 2.78	4.24	ý	7.92 4		7.92

Sessonal average for 6 years. averages for period of record. * Estimated. (a) Monthly

TURNEL NO. 2 - N. W. & Sec. 7, T. 2 N., R. 3 W., S. R. N. Flev. 4890 feet. Monthly, Sessonel and Average Amounts of Precipitation in Inches.

Season	••	.1	4.	32,42		,
Se		- 1	1	32	1	
Sept.			.32			
·9n7		00.00	• 53	00.	1	
July		0.10	00.	00•	;	
June		1	0.05	00•	00.	
May		1	1.23	* 08	.22	
hpr.		1	0.48	98.	1.23	
Mar.		1	2.41	5.32	3.24	
Feb.		1	1.42	.92	00.	
J.r.n.		-	1.75	8.94	1.17	
Dec.		1	3.97	14.96	96.	
For		}	;	00.	2.34	
Year :: Oct.		1	1.10	.34	00.	
	••	••	**	••	••	••
Verir		892-93	1893-94	894-95	895-96	

11-1221 Traft 1331.8 ---1 45 -a . . .

Table 39, continued

UPPER TOLL GATE - S. $\frac{1}{4}$ Cor. Sec. 22, T. 2 N., R. 4 W., S. B. M. Elev. 4980 feet approx. Monthly, Seasonal and Average Amounts of Precipitation in Inches.

Season		;	68,76	;	
ing. Sept.		0.50	00.	1	
ing.		09.0	00.	00.	
July		00.00	00.	00•	
June		:	00.00	00.	
May		i	1.55	1.26	
Apr.		1	3,16	1.72	
- 1		;	13,27	6.45	
Feb. \ Mer.		1	5.15	80.	
Jan.		1	20.88	5.34	
Oct. Nov. Dec. Jan.		1	24.45	2.64	
Nov.		1	0.30 0.00	4.08	
Oct.		1	0.30	00.	
	••	••	••	• •	••
Year :		393-94	1894-95	1804-96	

Monthly, Seasonal and Lverage Amounts of Precipitation in Inches. VICTORVILLE - Elevation 2716 feet.

		••	••	••	••	••		••	••	**	**	٠.,	••	••	••	** **	::
Season		6.97	5.99	8.24	7.25	3.75	4.37	5.00	3,60		,7.71	8.89	5.01	4.24	4.62	2.78	5.38
Sept.		20.0	•05	00.	1.40	00°	00•	1.96	00.	00.	EH	•56	•16	00•	.17	000*	-29
Aug.		0.24	00.	00.	.10	.31	00.	00.	00.	.12	00.	•26	• 30	00.	.32	00.*	.11
July		00.00	.32	00.	00.	00.	.21	€1	€⊣	• 55	60.	E⊣	00.	•08	• 35	00 *	.11
June		00.00	80.	00•	00•	00.	00•	€⊣	00•	°05	60.	00.	00•	00•	00.	00.	.01
May		0.58	.21	00.	.16	.14	00.	90.	.11	E⊣	.12	.13	.11	.18	.11	00.	.13
hpr.		0.04	• 35	00.	.02	00.	00.	• 20	.18	00•	1.04	• 50	.37	.11	00.	00.	.19
Mar.		2.19	1.13	1.15	.26	1,20	.53	.23	3.10	.18	.10	.32	.17	.27	1.63	00.	.83
Feb.		2.12	•74	1.00	1.51	.49	E→	1.26	00.	.86	2.00	1.58	.40	90.	1.88	00.	.93
Jan.		1.27	.37	2.13	1.73	.52	1.37	68.	00.	.57	3.10	2.70	2.33	1.57	.13	•05	1.24
Dec.		0.40	.02	2.00	.10	.20	2.01	⊱⊣	.02	00•	.16	2.23	1.04	1.68	00.	• 45	.68
Nov.		00.00	2.80	1.96	.12	00.	.25	.17	00.	00.	96.	.15	.13	00.	00.	.81	.49
Oct.		0.10	99.	00.	1.85	68.	00.	.23	.19	00.	•02	.46	00.	.29	• 03	1.50	.37
	••	••	••	••	••	••	••	10	••	••	••	••	••	••	••		
Year		1904-05	1905-06	1906-07	11907-08	1908-09	1909-10	1810-11	1911-12	1912-13	1913-14	1914-15	1915-16	1916-17	1917-18	1918-19	Weens (a)
1 i		40		••	••	••	i	••	••	••	••			• •	••		

* Estimated.

⁽a) Monthly and Seasonal averages for 15 years.

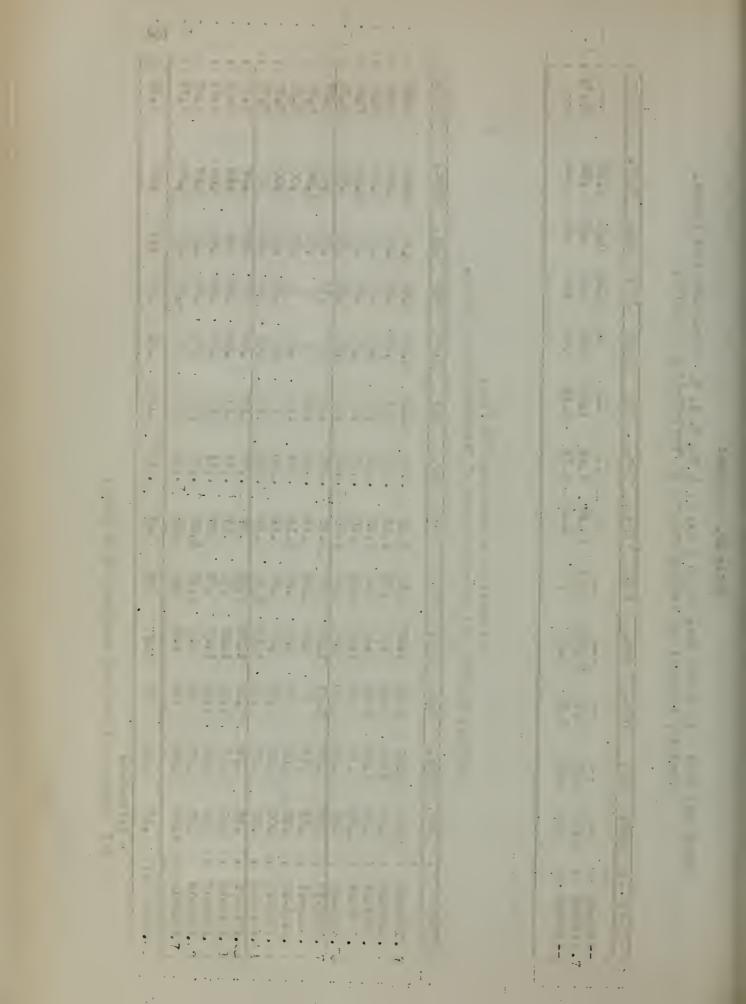


Table 40

Monthly and Seasonal Discharges at Gaging Stations

All the gaging stations for which records are presented are on the Mojave River and its tributaries. The monthly and seasonal discharges at stations maintained by the Arrowhead Company were calculated by the Division of Water Resources from discharge measurements, water stage records and other data made available by the Company. Daily discharges calculated from the same data are presented in a separate report. Monthly and seasonal discharges at stations maintained by the United States Geological Survey are from Water-Supply Papers and unpublished records of that organization.

0.00

ADDRESS OF THE OWNER OF THE PARTY OF

Table 40

Monthly discharge, in acre feet, of BUCK CREEK above junction with Grab Creek.

Season: Oct. Nov. Dec. Jan. Feb. Mar. Apr. May June July Aug. 1892-93: 4.7 13.3 37.1 57.0 163 142 57.3 18.7 6.6 1.6 1893-94: 2.9 6.6 10.1 12.3 13.5 52.9 26.8 9.3 3.8 1.5 0 1894-95: 103 112 248 125 50.6 19.4 6.9 1.3			-								-			ŀ	Į
: 4.7 13.3 37.1 57.0 163 142 57.3 18.7 : 2.9 6.6 10.1 12.3 13.5 52.9 26.8 9.3 3.8 : 103 112 248 125 50.6 19.4	Season	: 0c	t. No.	v. Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Total	
. 2.9 6.6 10.1 12.3 13.5 52.9 26.8 9.3 3.8 103 112 248 125 50.6 19.4		••	į												
: 2.9 6.6 10.1 12.3 13.5 52.9 26.8 9.3 3.8 : 103 112 248 125 50.6 19.4	392-93			•	37		163	142	57.3	18.7	9.9	1.6	10.4	1	
; 103 112 248 125 50.6 19.4	193-94	2.					52.9	26.8	9.3	3,00	1.5	0	0	140	
•	394-95		1		103	112	248	125	9.03	19.4	6.9	1.3	0	1	
		••													

Monthly discharge, in acre feet, of CEDAR CREEK in NWA Sec. 19, T.2 N., R.2 W., S.B.M.

ļ		••	••	••	••	
	Total		122	518	1	
	Sept.		0	0	;	
	Aug.		0	4.8 0.9	1 2	
	July Aug.		0.7	4.8	1	
any.	June		6.2	17.5	1.9	
All records from Arrowhead Company.	Ma.y			45.8		
Arrowhe	Apr.		31,8	107	18.0	
ls from	Mar.		45.9	159	16.7	
record	Feb.		12.7	85.9 159	3,9	
A11	Jan.		8.4	72.4	7.8	
	Dec.		2,1	24.6	0.1	
	Nov.		0	0	0	
	Oct.		0	0	0	į
			••	••	••	••
	Season		1893-94	1894-95	1895-96	
	••	••			••	••

Monthly discharge, in acre feet, of COX'S CHEEK in WHE Sec. 10, T.2 N., R.2 W., S.B.M.

			••	••	••	••
	Tota1		1	1280	40.5	
	July Aug. Sept.		0.3	0	0	
	Aug.		0.3	0	0	
	July		0.4	0.8	0	
any.	June		3.6	6.3	0.3	
ad Comp	Lay		7.3	19.4	2.4	
All records from Arrowhead Company.			15.6	93.6	4.8	
ds from	Mar.		40.1	185	15.0	
record	Feb.		24.8	400 185	4.7	
A1	Jan.		22.4	140	6.7	
	Oct. Nov. Dec. Jan. Feb. Mar. Apr.		13.9	433	4.8	
	Nov.		1	1.8	1.8	
	Oct.		I I	1.5	0	
	••	••	••	••	••	••
	Season		1893-94	1894-95	1895-96	
	99			49		

F-1- 1-1		C
12013	182 1	10.1
1-5 1 2	1- 唐皇	± 8 -
	The state of the s	601
12100	102 10 5	200
A KEEP S		
		702 (4)
467 447	THE PAR	
1-2- 11-	1-11 20	125
35 F Nº L		1.5
1 521 1 5	1 2 3 2	112
		1 - 2 . 18

Table 40, continued

Monthly discharge, in acre feet, of CRAB CREEK above junction with Buck Creek.

	ı	٠.	••	••	••	••
	Total		1690	558	4410	
	Septe		21.8	0	0	
	Aug.		7.4	0	7.2	
	July		13.6	2,0	19.9	
	June			19.4		
Company.	May		169	39,7	203	
whead	Apr.		491	123	526	
rom Arr	Lar.		454	192	1250	
records from Arron	Jan. Feb.		207	55.2	477	
All re	Jan.		189	48.9	508	
	Nov. Dec.		67.7	37.6	1340	
	Nov.		22.9	24.1	0.9	
	Oct.		6.5	16.0	0	
			••	••	••	••
	Season : Oct.		1892-93	1893-94	1894-95	

Monthly discharge, in acre feet, of CRAB CREEK below junction with Euck Creek

		••	0		. 7	ω						0					9			••
	Total		44	237	437	27	1	1	2530	4030	6730	1650	3060	3730	4310	1030	716	4670	i	
	Sept.		1.5	3.9	3.6	1.2	1	;	2.3	8.9	6.8	2 . 6	-स ८३	1.6	2.1	4.1	1.0	18.6	1	
	Aug.		0.5	53 53	3.8	0	1	-	3,3	15.7	13.4	7.7	4.5	2.2	3.2	3.4	2.1	72.9	;	
	July		1.4	12.3	3.6	1.5	1	1	24.8	57.7	47.8	12.3	16.3	3.5	18.2	12.8	4.7	50.6	;	
	June		14.5	51.0	12.8	12.2	12.5	1	96.8	157	178	62.0	91.8	23.6	72.4	59.8	27.6	186	148	
ompany.	Lay		37.1	335	51.6	26.4	120	1	370	379	595	162	316	84.4	172	259	96.3	552	711	
owhead (Apr.		70.3	1110	51,2	34.3	29.1	1	245	695	1580	328	704	248	555	321	268	299	7-40	
All records from Arrowhead Company	Mar		143	424	55.9	83.0	25.5		910	2410	2420	415	390	292	2060	250	185	750	564	
ecords f	Feb.		39.7	339	89.2	71.9	19.2	-	769	111	927	317	689	177	541	25.1	52.1	1510	1810	
All r	Jan.		50.6	42.9	67.8	25.4	37.4	1	91.8	118	436	212	752	1810	836	34.8	28.0	811	178	
	Dec.		40.7	27.3	45.4	12.7	26.3	1	9.6	35.7	497	43.8	58.2	1040	27.5	29.4	21.5	27.9	29.5	
•	Nov.		41.2	18.6	35.6	4.9	27.8	;	4.3	46.2	18.1	45.5	20.2	42.2	18.8	20.6	19.9	23.8	12.3	
1	Oct.		0	4.3	19.4	4.9	14.8	1	2.9	3.0	ω• 6	41.7	12.7	5.7	2.6	11,2	9.7	3.0	48.6	
		••	••	••	••	••	••		••	••	••	••		••	••	••	••	••	••	••
	Season		: 1895-96	: 1896-97	: 1897-98	: 1898-99	1899-00	: 1900-04	: 1304-05	: 1905-06	: 1906-07	: 1907-08	: 1908-09	: 1909-10	: 1910-11	: 1911-12	: 1912-13	: 1913-14	: 1914-15	••

		1			1.
133		in the	at a	148/11	
# 11-	ESEV	555	Ei	THE	
135	7-7-		21	7	
156				TARKE	
		E TO	- 1	EFFE	
51	MA-S	23			
		1000	1	FERES	
				Shee	
		\ - -		SIT A	413
		ja a a	1- 1	MASSE	1
		971		THE STATE OF	
				11655	
**		g-i	- 1 1 1 1		1
510		111	1	7341	
		2		95199	

				100	
			٠,	107	
				12	
	6				
				100	
				100	
-0					
	-				
	•	-			
		,		100	
L				и	
		п	2	100	
		2			
- 2					
		*			
				0	
			100		
-81		*			
-81					1
			7		
				-	
-					
- 1		-			
-91		ï			Ve
1					li
1				B	
1				100000	200
1				100	1
		4		Santa Line	200
1		4	-	Sept of the last	200
1		4		The same of the	200
1		4		The control of the	200
		4		Section of the last	200
		4		The control of	200
		4	1 10 10 10	State of the last	200
		4	2 12 10 11	State of the last	200
		4	1 10 10 10	State of the last	200
		4		State of the last	200
		4	1 10 10 10	State of the last	200
	74 - 10 - 10 - 17	••			200
	The same state of	4			200
	The same state of	••			200
-		••			200
	74 - 10 - 10 - 10 - 10 - 10	••			
		••			

Dente and in spanial

NAME AND ADDRESS OF THE PARTY O

Table 40, continued

Monthly discharge, in acre feet, of LEEF CREEK below Green Valley Creek.

	,		••	••	••	••	••	, ··	••	••	••	••	, ··	••	••	••	••	٠.	••	••	••	••		
	Total		1	20900	5130	28500	3330	15600	4330	2100	!	!	16100	21800	33200	12600	23800	21800	24400	9380	6540	25200	ĭ	
:	Sert.		41.0	151	40.2	137	23.4	59.9	26.8	17.8	1 1	1 1	47.4	88.6	70.07	86.39	82.5	0.42	59.8	49.9	39.7	42.6	1	
	Ant.		51,5	109	42.2	144	32.3	72.6	30.7	13.4	1	!	77.5	126	92.9	72.7	101	47.5	61.7	57.0	55.2	91.5	1	
	Jn1y		137	207	68.4	222	35.1	165	60.4	26.0	1	1	193	320	215	155	166	90.2	146	140	92.3	217	i	
	, rune		1	432	170	443	137	455	228	138	159	;	627	970	650	434	491	178	334	321	259	522	853	
Company]"a1.		1	1380	320	1300	295	3360	1190	187	1920	1	3040	2370	2580	1470	1990	489	7.94	2060	585	2270	5200	
rowhead	Apr.		1	5410	1160	3690	538	7440	541	300	411	i	1980	3530	9320	3100	5570	1490	2120	3800	2890	2970	6030	
from Arrowhead	Nar.		1	5340	1980	8150	1070	1680	484	859	265	1	5180	11800	11100	3720	3310	1550	10600	2270	1690	4980	5480	
records	Feb.		i	3110	453	3950	245	1620	774	224	161	1	4050	1120	5480	1730	4150	1170	3390	127	977	9140	6120	
	Jan.		1	2920	407	4950	299	300	372	138	396	1	309	1060	1570	1210	7190	10700	0199	164	142	4370	1100	
	Dec.		;	1520	213	5380	208	185	156	84.4	346	1	94.9	163	1900	189	522	5560	104	138	106	227	256	
	Nov.		1	289	162	63.6	7,65	194	181	72.9	280	1	93.5	164	123	184	135	392	97.3	137	129	322	126	
	Oct.		1	71.1	117	55.3	185	0.99	288	40.4	557	1	96.6	70.7	84.1	262	135	2.96	68.89	115	109	62.1	86.6	
		••	••	••	••	••	••	••	••	••	••	••		••	••	••	••	••	••	••	••	••	••	
	Season		: 1891-92	: 1892-93	: 1893-94	: 1894-95	: 1895-96	: 1896-97	: 1897-98	: 1896-99	: 1899-00	: 1900-04	: 1904-05	: 1905-06	: 1906-07	: 1907-08	: 1908-09	: 1909-10	: 1910-11	: 1911-12	: 1912-13	: 1913-14	: 1914-15	

Wonthly discharge, in acre feet, of DRY CREEK in NET Sec. 11, T.2 N., R.2 W., S.B.M.

	1 .	••	••	••	••	
	Total		9.09	789	23.2	
	Sept.		0	0	0	
	kug.		0	0	0	
	July Aug.		0	0	0	
٧.	June		0.5	53	0	
Corpan	Lay J		2.5	12.0	1.2	
rrowhead	. Apr. La			43.5		
from An	Mar.			146		
All records from Arrowhead Corpany.	Feo. Mar.		8.0	85.1	1.8	
411	Jan.		9.1	86.1	1.5	
	Dec.		9.9	413	0	
	Nov.		0.2	0	0	
	Oct.		0	0	0	
		••	••	••	••	••
	Season		1893-94	1894-95	1895-96	
	••	••	••	••	••	••

P	P

		- a representation of the Special States, a
		THE PARTY OF
		145459-11-11549627-E
		TESTED ATTESTS OF THE
	- 45	THE PARTY OF THE P
	15 16 1	111111111111111111111111111111111111111
	-4	43111 22121 255 (Falter)
		THE PROPERTY OF
	507 192	上123 日本日本日本日本日本日本日本日本日本日本日本日本日本日本日本日本日本日本日本
	-11	SELLI SELENT TREE LINE I
	455 6	1918/ 4910 1888/1986
	65 10 2	A PREADURE DE LE PRESENTE LA
	- 18	EASSTALLERS A PROPERTY
		Signification of
***	111/4	STATE OF STA

Table 40, continued

Monthly discharge, in acre feet, of EAST FORK OF MOJAVE RIVER (Deep Creek) above junction with West Fork.

	ALL	(၁၁ခ	rds from	Arrowhee	d Compa	ny except	seasons	marked	with *	which ar	are from	I.S. Ged	logica	Geological Survey	
••	Season	••	Oct.	llov.	Dec.	eason : Oct. Nov. Dec. Jan.	Feb. Mar. Apr.	Mar.	dpr.	May	June	July	-Sny	Sept.	Total:
••		••			1 1	1 1 2								AND A TO A T	
••	1904-05	••	1	;	155	1910	13900	22100	6220	8780		465	81.6	46.5	:
	1905-06	••	7.96	465	680	2700	3230	53800	14200	7880		1170	410	221	88500:
••	1906-07	••	275	1140	0006	14100	21100	49700	26400	9420		1440	703	510	138000:
••	1907-08	••	1300	1300	1210	5830	8330	9240	6230	3360		417	258	197	38900:
	1908-09	••	484	596	1310	11300	15700	8790	12100	4650	1250	490	269	263	57300:
••	1809-10	••	340	1320	31000	70600	0609	5800	7800	5440		183	107	118	129000:
	1910-11	••	240	464	909	16000	12600	43000	7800	3520		802	219	136	87000:
••	1011-12	••	502	713	1190	923	726	7540	8590	5100		399	88.5	59.8	26900 :
	1912-13	••	185	280	415	689	1930	3680	5430	1120		137	493	136	14800:
	1913-14	••	79.2	945	701	20700	39700	16200	8630	8430		1210	116	71.5	: 00166
••	1914-15	••	247	295	1220	5280	30800	17000	14800	15200		2007	133	102	89700
••	1915-16	••	144	4.39	870	82400	25200	30000	8110	5010		599	275	155	155000:
••	1916-17	••	1560	817	966	2050	5580	8380	8650	3580	798	95.0	88.8	44.6	32600:
	1917-18	••	67.5	162	268	393	2820	32200	3120	1480		75.5	37.2	37.8	41200:
	1918-19	••	142	440	803	619	1120	3340	4130	789	5	36.4	22.6	42.0	11600:
••	1919-20	••	196	435	1690	පිළිම	11700	16100	16600	5260	1	214	31.3	22.0	54100:
••	1920-21	••	258	949	909	3590	2910	0096	3620	0039		243	37.6	20.0	30000
••	1921-12	••	214	101	51800	21900	44100	17900	2190€	13800		768	319	124	177000:
	1922-29	••	1 1	1	1	;	1	į	1	1		ł	;	1	:
*	*1925-30	••	-	1	-	066	1470	6700	4140	6950	827	78.7	49.2	30.9	:
*	:*1930-31	••	218	893	573	615	3600	1020	3790	1260	234	59.0	44.3	35.7	12300
*	:*1931-02	••	138	418	3410	1430	28500	14700	11200	5800	1310	198	25.9	13.7	: 00129
* '	*1932-33	••		308	652	1100	1610	5120	3420	1590	446	19.9	8.1	0.9	14500:
*	955-54		14.3	131	2330	5880	1260	1320	446	146	99.4	14.3	20.8	25.8	11700:
									-	-			States or Will owner, Style - Million or	Service on the service of the last of the	- Company of the last of the l

Monthly discharge, in acre feet, of FERN CREEK, in NWZ of Sec. 24, T.2 N., R.3 W., S.B.M.

	,		••	•	• ••	. ,
	Tota1		61.8	265) 1) 1	
	Sept.		0	С	, ;	
	· Sny		0	53	1	
	July		0.0	4.0	1	
anv.	ouno		3.5	6.6	1.8	
ad Comp	Eay		7.1	22,3	₹4 •0	
All records from Arrowhead Company.	Apr.		14.9	58.5	7.0	
	iar.		21.3	80.0	6.2	
	Feb.		 	37.7	2.2	
	Jan	ı	5.7	36.2	1.8	
	Lec.		2.7	15.3	0.9	
	Nov.	(0	0	6.0	
	Oct.	(>	0	0	
		••		••	••	••
	Season	2001	1880-34	1894-95	1895-56	
-						

Table 40, continued

Wonthly discharge, in acre feet, of GRASS VALLEY CREEK in NW Sec. 17, I.2 N., R.3 W., S.B.M.

				All reco	rds irom	Arrowhe	ad Company	1.Y.					
Season	: 0ct.	Nov.	Dec.	Jan.	an. Feb.	Mar.	Apr.	Mey	June	J213	11 UE.	Sept.	Total
	••												
1892-93	: 13.0	49.8	360	568		1560	909	276	126	80.9	26.0	22.1	4840
1893-94	: 25.1	32.6	48.3	105		429	177	95.4	57.2	30.0	14.9	11.0	1160:
1694-95	: 11.4	12.5	734	723		1480	6559	313	123	54.4	25.5	- FO	5010
1895-96	: 16.6	56.4	34.7	58.1		187	116	70.6	32.3	10.	σ, ∞	رى د - ا	651
16-9631	: 6.7	13.3	19.1	39.8	466	607	1070	332	76.4	33.	10.5	7.4	2680
1897-93	: 28.4	24.7	22.2	43.7	}	133	106	193	38.1	0.6	2.1	2.1	760
1898-99	8.9	10.1	12.4	17.1		85.6	73,5	30.1	31.1	6.8	2.5	4.00	300
1899-00	: 20.8	14.9	18.5	26.7		34.9	50.2	233	30.2	ŧ	•	1	1
1900-04	:	ł	i	;		1 1	1	;	1	1	i	ł	!
1904-05	6.9	10,3	14.8	127	402	951	355	367	108	40.4	16.1	10.7	2720
1905-06	: 13.0	32.1	29.5	146	165	2920	455	388	192	74.3	25.5	15.3	4470
1906-07	: 13.4	28.3	293	331	863	2690	705	244	113	36.1	12.2	7.1	5340
1907-08	: 28.5	24.6	25.4	221	322	276	150	132	52.4	19.0	ω	7.6	1270
1908-09	: 21.2	19.0	27.8	1660	808	225	284	151	87.6	26.7	11.0	. co	3330
1909-10	8.5	51.0	955	2240	209	238	226	81.6	50.1	12.0	5.0	7.6	4060
1910-11	3.5	10.0	12.4	924	831	210	501	212	78.6	24.4	8.7	4.5	2820
1911-12	: 10.3	16,8	•	54.7	25.2	442	527	213	75.6	29.1	10.7	7.4	1410
1912-13	: 11,4	19.0	18.2	27.1	164	363	356	106	56.7	24.0	11.4	6.1	1160
1913-14	5.4	36.5	33,4	724	5390	621	480	376	125	;	ł	1	1 1
	••												•

Nonthly discharge, in acre feet, of GUERNSEY CREEK in NW4 Sec. 10, T.2 N., R.3 W., S.B.W. All records from Arrawhead Commeny

1			**	٤	•									
season		Oct.	Nov.	Dec.	Jan.	Jan. Feb. Mar.	Lar.	br.	lay	June	Julyug.	- 202.	Sept.	Total
	••								ŧ.					
1892-93	••	1	4.4	46.0	0.06	124		2.96	27.7	8.0	3.3	0.7	63	1
1893-94	••	1.4	3.0	3.7	13.9	31.5		α υ	6.2	9.2	0.3	0	C	727
694-95	••	0	0	97.4	82.5	155		9.89	28.9	10.2	28	0	0	540
96-968	••	0	0.1	1.2	3.5	2.1	30.7	7.5	3.3	£ 1	1	1) I	2 1

	Transfer and the second
MI SHE	100000000000000000000000000000000000000
1	125-1-0000000000000000000000000000000000
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
1,0 113	- STEEL STEE
1	
- 11	
1-11	
	The state of the s
1000	2000年1日 1日 1
	TERRETAIN TOTAL PROPERTY OF THE PARTY OF THE
- 21	
	THE PARTY OF THE P
(

Monthly discherge, in acre fect, of HOLCOMB CREEK in 四倍 Sec. 11, T.2 E., R.2 W., S.B.M.

	Total:	••	9610:	3260:	21200:	2880 :	7390:	1130:	724 :	:	!	5750:	10600	21500:	6590:	8950:	11900:	12600:	3830:	1850:	11100:	;	••
	Sept.		62.1	53.5	68.5	25.6	61.2	0	0	;	1	2.6	65.7	122	65.9	66.2	78.3	59.0	20.4	45.4	43.2	;	
	/ng•		34.3	62.7	169	438	62.6	0	0	}	1	3.7	103	176	98.7	82.4	81.4	73.9	22.4	101	93.2	1	
	July		92.3	38.6	134	11.7	128	0.7	0	;	;	48.5	229	331	122	110	129	184	77.4	25.7	177	;	
	June		161	113	396	76.8	177	37.6	31.9	33.0	;	252	510	922	202	370	238	301	175	116	431	784	
ombany.	May		810	234	1200	234	7.4.0	121	69.3	8 237	1	812	1390	2400	644	1250	307	623	894	199	1580	2810	
whead	hpr.		2440	000	2820	326	3140	209	155	76.	1	756	2400	5750	1370	2660	834	1440	1200	510	1300	3780	
from Arr	Jan. Feb. Mer.									7 57.6		i	į				1						
cords	Feb.		1260	273	2220	221	843	131	107	49.7	l	1170	323	2370	908	1460	4.58	1770	140	150	3730	2420	
ALL re	Jan.		1510	285	2540	241	201	114	60.2	97.0	1	223	267	1460	473	1200	5010	2510	172	104	1540	1090	
	Dec.		454	234	6750	201	92.2	83.6	44.7	55.2	1	26.7	143	923	278	300	3620	134	185	94.6	120	181	
	Nov.		123	150	63.6	282	71.7	94.3	23.3	59.2	1	30.4	120	148	308	140	215	143	159	88.1	105	112	
	Oct.		56.9	85.8	46.9	154	50.7	125	7.1	112	1	23.6	19.7	\$. 88	362	120	84.1	125	129	55.1	48.6	94.5	
	n		3	**	 	50	·•	3	6	0	~	5	. 9		8	٠. ت					4 :	ى.	•
	Season		: 1892-93	: 1893-94	: 1894-95	: 1895-90	: 1896-57	1897-98	: 1838-99	: 1899-00	: 1900-0₫	: 1904-05	: 1905-06	: 1906-07	: 1907-08	: 1908-09	: 1909-10	: 1910-1	: 1.9111	: 1912-13	: 1913-1	: 1914-15	

Monthly discharge, in acre foet, of HOOM'S CREEN in SEA Sec. 14, T.2 N., R.3 W., S.Z.L.

						All re	cords f.	rom Arre	owhead Co	ompany.					
	Season	••	Oct.	· ACH	De c.	Jan.	Feb.	Mar.	. rpr.	May		July	ug.	Sept.	Total:
1	1891-92		;	;	1	1	-	1	1	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4	42.4	25.1	25.8	1
: 18	1892-93	••	21.8	34.6	139	142	350	665	568	228		65.5	40.9	45.2	2.20:
. 1	1893-94	••	49.0	69.2	83.3	78.2	80.0	184	118	74.7		36.3	34.6	15.5	\$ 698
. 1	1894-95	••	23.3	24.8	218	257	347	929	242	217		57.2	38.€	26.8	2420 :
	96-9631	**	30.9	51.4	66.0	53.8	39.9	83.5	61.4	4.6.3		}	!	1	;
••		••													••

PERSONAL PROPERTY OF - STEET 1317

Table 40, continued

Nonthly discharge, in acre feet, of HUSTON FLIT CREEK in NW Sec. 23, T.2 N., R.4 W., S.B.M.

1	,	••		6	vii.	••	**
70407	1000		2230	689	324	-	
1000	00/100		3.1	3.0	9.0	i	
20.00	-11(g)		7.4	3.3	<i>z</i> ⁺ −	i	
Tra Jar	01. I y		19.9	9.9	6.1	1	
ם מנון.	0.0120		44.1	46.1	22.8	19.6	
ĺ	20 1		169	278	26.2	208	
	- 7/14-		ひそで	50.9	26.7	67.2	
100	1,10.		859	75.3	143	33.3	
לם ל			625	133	38.9	32.2	
Ign	00.11		46.3	49.2	1.0.1	52.0	
7.00	ł		ත න	23.4	3,1	25.4	
Noar	0 0 0 17		4.7	8,3	3.0	5.4	
+00			1.3	7.8	3.4	56.9	
į .	٠į	••	••	••	••	••	••
0000	Deaboil		1896-97	1897-98	1898-99	1899-00	
1	. 1	••	••	••		••	

Monthly discharge, in acre feet, of LITTLE BEAR CREEK at Little Bear damsite.

					A11	l records	records from Arrowhead Company	rrowhea	id Comp	any.					
Season		Oct.	• AC.1	Dec.	, an	Feb.	lar.	$i_{ m pr}$	May	Jine	hily	खेतुन स्थाप	Sept.	Tota1	
	••														٠.
1892-93	••	72.0	261	196	1320	2360	5330	2790	857	365	173	94.0	78.9	14700	**
1893-94	••	121	206	315	464	545	1100	487	246	116	65.5	46.3	46.2	3770	••
1804-95	••	44.6	49.3	1740	1890	2260	3280	1820	846	365	177	76.3	58.1	12600	••
1895-96	••	66.3	157	174	267	178	631	347	208	65.8	39.8	27.4	31.8	2190	••
1696-97	••	48.5	62.1	75.7	175	1290	1730	1890	728	224	118	50.9	40°4	6430	••
1897-98	••	126	104	109	223	449	300	177	598	134	34.6	18.1	16.3	2290	
66-868¢	••	19.4	22.8	34.8	63.3	180	385	168	102	89.6	14.8	14.0	9.6	1100	**
1899-00	••	35.5	41.5	9.66	157	49.0	138	195	599	61.5	18.2	9.6	00	1480	**
10-0067	••	ල ල	736	148	1140	2020	1750	596	538	161	41.8	24.0	14.9	7180	••
1901-02		91.0	97.2	77.7	101	366	1070	630	222	80°5	30.4	12.2	8.2	2800	**
1902-03	••	11.2	59.4	117	448	421	1630	2830	712	230	94.6	29.2	22.9	6590	1"
1903-04	••	55.0	61.5	72.6	94.7	262	1100	*545	*430	*415	t 1	1	;	3200	••
1904-05	••	16.5	₹.82	23.0	248	1420	1770	527	302	279	116	36.0	61*	5190	••

* Estimated.

P. CANADA CO.	
	1961
ALLET AND ADDRESS OF	4855 A
ENGINEER PROPERTY.	
THE RESERVE OF THE	15 05 開皇
	9537 14
	Tal His
al duter de la	
1-14	
VELLER SETTING	
AT BUTTON TO	
	1272
- Accessor	TATE
1 4 -4 - 1 - 1	
	7174
	P

Menthly discharge, in acre feet, of LITTLE BEAR RESERVOIR at north end of Tunnel No. 1.

11 records from Arrowhead Company.

)				6-1-1					
Season	••	Season : Oct.	Nov.	Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	ing.	Sept.	Total
	••			1										
1905-06	**	0	0	194	650	704	5340				0	34.6	0	11900
1906-07	••	0	429	1220	1830	3420	6340				174	13.8	30.8	18800
80-7061	••	35.2	172	96.5	870	1590	1360				25.3	12.5	10.9	4240
1908-09	••	5.6	7.2	7.2	7.4	10.6	23.5				28.0	28.2	27.7	223
1909-10	••	29.4	29.1	31.8	2700 1	1260	201	4520	3850	2.5	1.0	1.8	1.4	12600:
1510-11	"	1.8	1.8	,	1.6	1.7	3.1				1.8	1.8	5.5	28.5
1911-12	••	163	41.6	332	1.2	1.1	1.8				1	1	1	;
1912-13	••	1	1	-	-	1	1				ţ	;	ł	1
1913-14	••	1	1	}	-	1	2420	1160	1200	1160	1200	50.5	0	\$ 1
1914-15	••	0	0	0	0	1510	0301	0	2750	1040	1	!	1	;
	••													

9, T.2 N., R.2 W., S.B.M. Fonthly discharge, in acre feet, of MIDMAY GREEN in MA Sec.

8.0 Total 583 Sept. 00 ·sug. 00 July 00 June 0.3 2.1 All records from Arrowhead Company. ippr. 7.6 Mar. Feb. 0.4 Jan. 0.57 53.1 Dec. 364 0 Nov. 00 Oot. 00 Season 1894-95 1895-96

Monthly discharge, in acre feet, of WILL CREEK in NY Sec. 10, T.2 N., R.5 W., S.B.W.

Total Sept. 3.1 ing. 4.7 1 July 6.1 June 12.1 21.6 All records from Arrowhead Company. Apr. 39.4 6.8 Mar. 70.5 Feb. 53.5 Jan. 25.5 26.2 Dec. Non. Oct. Season 1894-95 1595-96

, I . • fal, a re-1 1 1

Table 40, continued

	vey.	Total		1	135000	255000	58600	96200:	181000	147000:	45200	25900	165000	135000	234000 :	54800	58700	15400:	89400	52400:		1 1	15400	00207	00200	16100	• •
	Geological Survey	Sept.		46.6	221	512	197	264	119	142	61,9	140	75.6	108	157	44.8	37.9	42.0	22.8	30,1		30 0	35.7	127	2 5	2000	•
	Geologi	hug.		81.9	414	506	259	271	113	225	93.2	499	123	139	280	89.6	37.5	22.6	33.9	40.7	ł	49.2	44.3	25.0		20.8	
Forks.	from U.S.	July		474	1380	1480	422	495	189	822	406	143	1220	710	610	100	79.7	38.1	220	257	1	78.7	59.0	198	19.9	14.3) - -
below Forks	h are fr	June		246	641	5190	1310	1600	552	2130	1160	355	3640	4810	1950	1360	652	98.7	1720	4240	-	941	234	1370	452	99.4	
	1 * which are	May		15300	12800	13600	4650	6200	5790	2690	6720	1480	11500	21300	6700	5340	1940	918	7570	13300	1	10700	1500	6410	2120	146	
of MOJAVE	ked with	Apr.		9710	21800	29200	7880	17400	9720	12800	15700	7020	12400	18000	12500	12200	4510	4950	24900	5030	1	5220	5340	12800	4660	462	
e feet,	seasons marked with	Mar.		56300	82600	102000	12900	15500	7910	75400	16500	7450	23700	23500	43400	13800	46800	5130	33200	16200	1	10900	1060	20700	8570	1560	
in.		Feb.		20500	4440	26900	16300	33600	0696	25600	804	7060	76000	52000	29300	13700	3760	2030	17600	7640	1	1590	4760	48900	3000	1620	
cha	Company except	Jan.		2150	3640	37200	10800	13500	102000	23100	1170	894	34200	11600	128000	3870	395	737	924	6970	1	:	712	2870	2500	9360	
		Dec.		156	682	17100	1310	1310	43500	609	1320	416	704	1680		1730	270	864	2530	736	1	1	577	5410	652	2660	
O. T.	m Arrow	Nov.		;	467	1140	1300	597	1440	468	719	284	947	297	458	921	163	440	436	3/9	1	;	893	418	308	131	
	records from Arrowhead	Oct.		I	100	284	1300	486	344	244	503	187	79.5	248	152	1560	9.79	143.	196	0.53	1	ŀ	218	138	187	14.3	
	rec		••	••	••	••	••	-	••	••	••	••		••	••	••	••	••	••	••	••	••		••	••	••	
r	ALL	Season	••	: 1904-05	: 1905-06	: 1906-07	: 1907-08	: 1908-09	: 1909-10	: 1910-11	: 1911-12	: 1912-13	: 1913-14	: 1914-15	: 1915-16	: 1916-17	: 1917-18	1918-19	. 1919-20	12-0261 :	62-1261:	:*1929-30	:*1930-31	:*1931-32	:*1932-33	:*1933-34	•

					- >	 ö							36					100		
					b													H		
																		m		
			ie.	Š.	1 5	92		ij.			8						2	43		
												F	٩			3				
									î		27						2			
																	2			
															F	12		1	1000	
	5		1		ķ															
					50				×											
																		ю	1	
																	101			
4																				
																		×	1	
													1					-9		
ì																		-11		
î														ř	^			- 16		
						h												18		
					٠															
																		R,		
ı				3	-		-													
			1																-	
			4							Ñ				>						
		-		J			15					1			H			1		
	1-11-	-		- 11		-			75	-	-					0				

Telegraphy to the second

Table 40, continued

Monthly discharge, in acre feet, of MOJAVE RIVER at Victorville. All records from U.S. Geological Survey.

-	rotal :													24700 103000 103000 20 40400 20 34600 30 37600 30 84200 23900
۱	Aug. Sept.							1	Į		1			2460 2620 2460 2440 2150 2323 1940 2380
ļ	AT TO	i												2280 2280 2030 1990 1270 1380
	oune													2950 2330 2260 2260 2550 1370 1670
7.50	r. may													10 2640 20 4920 30 2890 40 8980 40 1750 50 3010 50 2020
	Apr													50
100	· I.a.													0 30900 0 3570 0 42700 0 2090 0 17000 0 2400
100	dan. red. hpr.				47						,-,			0 3330 0 3500 0 3280 0 17200 0 2230 0 2230 0 2370
	ı									3070 3500 3500 3700				
	nec.			02/1 0										
	NON			0 1610										
+00	0000	••	:	: 141(: 197(: 424(42.40	42.40	424(289(320(295(4240 2890 3200 2950 2860	424 2890 3200 3200 3950 3860	424 2890 3200 2950 2950 1 2860	4240 2890 3200 2950 2860 	4240 2890 3200 2950 2950 2860 1930
600000	oeason	••	: 1898-99	: 1899-00	: 1900-01	: 1901-02	: 1901-02 : 1902-03	: 1901-02 : 1902-03 : 1903-04	: 1901-02 : 1902-03 : 1903-04	: 1901-02 : 1902-03 : 1903-04 : 1904-05 : 1905-06	: 1901-02 : 1902-03 : 1903-04 : 1904-05 : 1906-30	1901-02 1902-03 1903-04 1904-05 1906-30 1906-30	1901-02 1902-03 1903-04 1904-05 1906-06 1906-30 1930-31	1901-02 1902-03 1903-04 1904-05 1906-30 1930-31 1931-32

Monthly discharge, in acre feet, of MOJAVE RIVER at Lower Karrows.

	C	-	-		1		107 177 110	Wilder Coll	Dally .					
		Oct.	Pov.	Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Total
••														-
••		1	1	2850	2550	0909	35500	5130	7070	1540	1320	1590	1660	 ¦
••		2380	2770	2840	2890	2490	56300	17700	8170	3120	1/20	1480	1900	103000
••		2280	2580	9230	30800	37100	00679	39000	8520	2410	1410	1550	1860	202000
••		2640	2680	2800	6140	11600	8940	4330	2510	1700	1700	1720	2050	48800:
		2420	2460	2720	14000	31400	12600	15300	3190	1690	1480	1640	1780	90700
••		2320	2960	25300	74300	7660	5790	7440	3900	2010	2080	1920	2160	138000
••		2890	3120	3280	13600	23400	64200	9370	2590	1790	1840	1870	2220	130000
••		2100	3260	3420	37.20	3040	8290	11100	3860	1850	1960	1560	1820	47300:
••		3000	2980	3350	3350	3170	2840	2600	2160	2180	1860	1930	1900	21300 :
••		2720	3030	3290	34000	00989	22200	9170	8640	2140	1890	1820	2150	160000
••		2740	3070	3470	14000	51500	24100	17300	13900	3340	1860	1790	2260	145000:
ł	1													

Table 40, continued

Monthly discharge, in acre feet, of MOJAVE RIVER at Point of Rocks.

_		ر	ľ	••
Total	1	111000	;	
Sept.	0	195	;	
July Aug.	0	0	1	
July	0	37.8	1	
June	0	233	155	
May	1730	2080	1180	
Apr.	12600	6390	8790	
lar.	11600	5680	60400	
Jan. Feb. Mar. Apr. May	37100	7610	22200	
Jan.	11000	74500	13700	
Dec.	3110	9130	2780	
Nov. Dec.	-	2440	2090	
Oct.	1	953	1470	
••	 ••	••	••	••
Season	60-806	01-6061	11-016	

Monthly discharge, in acre feet, of MOJAVE RIVER near Hodge.

					יחחם דדש	records from 0.0. debtogreat ourselvel	0.00	TORTOGT	o day inc					
Season		Oct.	Nov.	Dec.	Jan.	Jan. Feb. Mar. Apr. Lay	Mar.	Apr.		June	July	Aug.	June July Aug. Sept.	Total
	••													
930-31	••	0	0	0	277	1210	809	151	9.0	0	0	0	0	2320
931-32	••	0	0	331	ָ רַן	32400	15700	8270	1600	0	0	0	0	59500
	••													
			-											

Nonthly discharge, in acre feet, of MOJAVE RIVER at Barstow.

		••	••	**	••	••
	Total		0	40300	0	0
	Sept.		0	0	0	0
	hug.		0	0	0	J
	July .		0	0	0	0
	June		0	0	0	0
Survey.	May		0	105	0	0
logical	Apr.		0	3940	0	0
U.S. GBC	Mar.		0	0966	0	0
All records from U.S. Geological Survey	Feb.		0	26300	0	0
	Jan.		0	0	0	0
7	Dec.		0	0	0	0
	• AC . i		0	0	0	0
	Oct.		0	0	0	0
		••		••		••
	Season		1930-31	1931-32	1932-33	1933-34

part - 1900	PREEZY.	
	1111	1 1 1
1 11	1.1	
DI DI	1 - 17	8
1 1		12 1
	1.0	
1 70		1 3
1		7
(1.
4		His Ett
		8 8 9
		1 11 2
		LL.
		1 2 1 1 1 1
		1 1 1 1
	1 - 1 - 1 - 1 - 1	
		16 BV
		181 250 4
1 112		THE RE
		1 1 2
	2 11 5	HE VI
	2 14	
18.	41.	
		1 1 2
	1 N	1 100 18
1		
	1.0	1
11 1333	1 1 1 1 1	725
1000	1 1 1	755
10000000		Care III
		•

Table 40, continued

Monthly discharge, in acre feet, of WOJAVE RIVER at Afton.

ason : Oct. Nov. Dec. Jan. Feb. Mar. Apr. May July Aug. Sept. Total : -	Nov. Dec. Jan. Feb. Mar. Apr. May June July Aug. Sept. 116 92.8 102 78.6 81.8 56.5 58.7 36.9 51.8 102 117 122 111 85.7 64.6 49.7 45.2 114 121 129 6500 701 115 67.0 31.7 13.5 15. 28.0														
	: 116 92.8 102 78.6 81.8 56.5 58.7 36.9 51.8 : 86.1 102 117 122 111 85.7 64.6 49.7 45.2 : 73.2 114 121 129 6500 701 115 67.0 31.7 13.5 15. 28.0	ason	00	ov.	Dec.	Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Total
	. 86.1 102 117 122 111 85.7 58.7 56.9 51.8 86.1 102 117 122 111 85.7 64.6 49. 45.2 73.2 114 121 129 6500 701 115 67.0 31.7 13.5 15. 28.0		•												
. 86.1 102 117 118 108 117 122 111 85.7 64.6 49. 45.2 . 73.2 114 121 129 6500 701 115 67.0 31.7 13.5 15. 28.0	. 86.1 102 117 118 108 117 122 111 85.7 64.6 49. 45.2 . 73.2 114 121 129 6500 701 115 67.0 31.7 13.5 15. 28.0	9-30		*	!	116	95.8		78.6	81.8	56.5	58.7	36.9	51.8	;
. 73.2 114 121 129 6500 701 115 67.0 31.7 13.5 15. 28.0	. 73.2 114 121 129 6500 701 115 67.0 31.7 13.5 15. 28.0	0-31	. 86	02	113	118	108		122	111	85.7	64.6	49.	45.2	1120
		1-32	. 73	14	121	129	6500		115	0.79	31.7	13.5	15.	28.0	7910

Wonthly discharge, in acre feet, of PINE CREEK in NET Sec. 10, T.2 N., R.2 W., S.B.M.

	•• ,	••	••	••	••
	Total		221	3.5	
	June July Aug. Sept.		0	0	
	Aug.		0	0	
	July		0	0	
			0.1	0	
Comparing.	n. Feb. Mar. Apr. May		7,5	0	
rownead	Apr.		10.2		
I LOW AL	Mar.		36.3	3.2	
records	Feb.		25.7	0	
TTV	Jan.		20.4	0	
	Dec.		127	0	
	Oct. Nov.		0	0	
	Oct.		0	0	
			••	••	••
	Season		1894-95	96-5681	
				••	

Monthly discharge, in acre feet, of ROCK CAMP CREEK in STA Sec. 4, T.2 W., R.3 W., S.B.M.

1	•• 1	••	••	**	••	••	
	Total		1	49.4	237	14.4	
	nug. Sept.		0	0	0	0	
	.gnv		0	0	0	0	
	June July		0.7	0.5	0.7	0	
			1.6	0.7	5.9	0	
Company.	Pay		1	2.0	12.4	0.5	
All records from Arrowhead Company.	Apr.		1	3.7	42.0	2.0	
From 4.r	Mar.		1	24.4	78.4	11.1	
records	Feb. Mar		i	10.4	43.2	0.4	
A11 1	Jan.		;	6.9	21.6	0.4	
	Dec.		;	0.8	35.6	0	
	Nov.		1	0	0	0	
	Oct.		;	0	0	0	
			••	••	**	••	••
	Season		1892-93	1893-94	1894-95	1895-96	
				••	••	••	**

F	0.1177	17
\$e(#)))		- 481
	1 4 5	1000
	1 1	12-6
1000	1 4 1	335 0
	= 10	
	-7-1-59	
F 55 1 12 1	-5 1/1	PINE HILL
TERR SET		100 MAR 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
10751		950 14
	1 == 01 =	1 = 1 t
1101	//-	350
THE REAL		1000
2		

Table 40, continued

Monthly discharge, in acre feet, of ROCKY GULCH in SET Sec. 5, T.2 N., R.3 W., S.B.M.

۱		• •	••	••	**	••
Total		;	27.3	109	හ ග	
Sept.		0	0	0	0	
July Aug.		0	0	0	0	
Į.		0	0	0	0	
June		1	0.4	0.4	0	
hay		ł	1.6	2.7	0	
Fob. Mar. Apr. May J		1	2.1	11.9	٦.5	
Mar.		;	11.4	36.9	7.4	
Fob.		1	ය ව	21.1	0.4	
Jan.		i	4.7	13.5	0.8	
Dec.		;	1.2	22.0	0	
Nov.		1	0	0	0	
Oct.		1	0	0	0	
	••	••	••	••	••	••
Season : Oct. Nov. Dec.		1892-93	1893-94	1894-95	1805-96	

Monthly discharge, in acre feet, of SADDLE CREEK in NWA Sec. 7, T.2 N., R.3 W., S.B.M.

	į ••	• ••	•	• ••	•	٠,
Total		;	633	3 1		
Sept.		0	0	1		
Aug		0	0	1		
July		0	0	ł		
June		0	0	ł		
May		0	1.0	ł		
Apr.		0	31.2	0		
Mar.		26.0	142	6.5		
Feb.		25.1	149	0		
Jan.		28.6	148	0		
Dec.		1	162	0		
Nov.		!	0	0		
Oct.		;	0	0		
	••	••	••	••	••	
Season		1893-94	1894-95	1895-96		
	: Oct. Nov. Dec. Jan. Feb. Mar. Apr. May June July Aug. Sept.	: Oct. Nov. Dec.	: Oct. Nov. Dec. Jan. Feb. Mar. Apr. May June July Aug. Sept. : 28.6 22.1 26.0 0 0 0 0 0 0	: Oct. Nov. Dec. Jan. Feb. Mar. Apr. May June July Aug. Sept. : 28.6 22.1 26.0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	: Oct. Nov. Dec. Jan. Feb. Mar. Apr. May June July Aug. Sept. : 28.6 22.1 26.0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	: Oct. Nov. Dec. Jan. Feb. Mar. Apr. May June July Aug. Sept. : 28.6 22.1 26.0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

S.田.思. Monthly discharge, in acre feet, of SHAKE CREEK in NE4 Sec. 24, T.2 N., R.3 7., All records from Arrowhead Company.

Total			6			
Tota		i	23	80.	•	
Sept.	1	5,1	0	9.0	; ;	
, gny	i	5.2	1.0	1.7	1	
July		12.0	9.3	10.3	;	
June		27.1	12.8	30.3	5.0	
May		1	24.7	73.5	16.6	
Apr. May		1	48.2	153	26.6	
Mar.		1	65.5	211	33.8	
Feb.		;	25.3	129	16.1	
Jan.		1	27.4	112	18.7	
Dec.		1	15.7	77.0	14.8	
Mov.		1	9.7	3.4	13.7	
Oct.		:	ນຳນ	0.7.	7.0	
	••	••	••	••	••	••
Season		1892-93	1893-94	1894-95	1895-96	

The same

Table 40, continued

Monthly discharge, in acre feet, of SHEEF CREET in NET Sec. 19, T.2 N., R.2 W., S.B.M.

		••	••	••	••	,
	Tota1		357	1380	1	
	Sept.		0	1.0	;	And different and the second second
	July Aug.			3.00		THE BUILDING AND THE PARTY OF
	July		P3 ,	15.0	;	
	June		19.6	44.3	9.6	
ompany.	May		37.3	109	25.0	
owhead C	Apr.		72.4	246	40.9	
From Arr	Mar.		104	4.68	53.9	
records	Ian. Feb. Mar. Apr. May		39.4	208	20.00	
A11	Jan.		35.3	172	23.3	
	Nov. Dec.		26.5	113	18.1	
	Nov.			1.8	11.1	
	Oct.		5.0	0.2	2.8	
		••	••	••	**	
	Season : Oct.		1893-94	1894-95	96-4631	
	**	•••	••	**	**	**

T.2 M., R.3 M., S.B.M. Monthly disc'arge, in acre feet, of TUNNEL C in NWL Sec. 8,

1		••	••	••	••
	Total		62.5	0.8	
	June July Aug. Sept. Total		0	0	
	Aug.		0	0	
	July		0	0	
7.	June		1.0	0	
All records from Arrowhead Company.	May		4.8	0	
rowhead	Apr.		9.4 4.8	0	
from Ar	Mar.		8.8 14.7	0.8	
records	Feb. Mar. Apr. May		80	0	
A11	Jan.		7.9	0	
	Dec.		15.9	0	
	Nov.		0	0	
	Oct.		0	0	
		••	••	••	••
	Season : Oct.		1894-95	1895-96	

	A 8 8 5 5 5 V
25 1	To B
	100 6
	144 143
2 11 2	1515
- 10	10年 1982 1
a a constant of the constant o	
	252 757
15 11 2	1207 1 =
11 =	
	11122
LMA	1144

Table 40, continued

		"	1"	••	• •	•	• •	• •		•	• •	• •	• •		• ••	••	• • •	* **	1"	• • •		• •	• •		• •	
	ırvev.	Total		1	46700	118000	19700	38900	52400	60200	18100	11100	65000	45600	80000	22100	17500	3840	35300	21100			3090	32100	7960	-
	th East Fork. Geological Survev	Sept.		0	1.7	2.3	C	2,5	2.2	4.7	ω α	3.1	3.4	· •	2.6	1,4	0	0	0,8	Ö	;	C) C	0	0	
	with Ea . Geolo			0	3.4	0.9	اسا • ت تن	C2	3.7	6.4	3.8	20	က ထ	5.9	3.9	2.1	1.1	0	2.6	2.7	;	C	0	0	0	
	r · U.S.) ».		8.7	219	42.9		4.8	6.1	21,2	6.0	5.3	12.8	10.3	11.0	5.4	4.6	2.0	0.9	14.3	ì	C	0	0	0	(
	leet, of WEST FORK OF MOJAVE KIVEK above junction with East Fork. Iny except seasons marked with * which are fr · U.S. Geological Su	June		555	2750	1430	48.3	235	8.3	487	77.7	29.3	752	860	260	461	80.2	7.1	554	1130	1	114	0	57.7	4.8	c
	HIVER Sh * wh	May		4470	4880	4150	1300	1560	351	2160	1620	358	3030	909	1690	1770	460	122	2510	0039	;	3780	235	611	526	(
4 6 6 6	MOJAVE ked wit	Apr.		3500	7540	12800	1650	5290	1890	5010	6890	1580	3790	3210	4370	3600	1390	821	8340	1410	1	1080	1550	1650	1240	ח ר
	Seasons mar	Mar.		34200	29200	52300	3690	6750	2120	32300	8990	3780	7560	6480	13400	5510	14600	1800	17200	6590	1	4180	45.0	5980	3450	210
	t, or was:	Feb.		6670	1220	15800	7930	17800	3600	13000	77.0	5140	36300	22200	14100	8120	348	910	5810	1730	1	123	1160	20400	1340	787
	in acre leet ead Company e	Jan.		240	525	23100	4.930	7220	31800	7170	246	210	13500	6300	46100	1820	3.2	118	235	3570	1	1	97.2	1440	1400	3480
	ın ead	Dec.		1.2	2.6	8120	98.7	4.8	12500	3.2	134	2.7	3.0	461	40.0	731	2 %	9.09	817	129	ł	1	3.6	2000	0	329
1	from Ar	Nov		!	2.3	4.4	6.7	2.5	125	3.4	5,1	3,5	3,1	2.7	19.0	105	2.5	1.6	2.0	2.5	;	i	0	0.4	0	C
11.7	records from Arrowh	Oct.		1	0	2.1	4.9	2.0	3.0	3.5		3.0	2.2	2.8	7.6	S. 53	03 03	1.7	0.4	1.3	1	ť	0	0	0	0
-			••	••	••	••	••	••	••	••	••	••		••	••	••	••		••	••	••	••		40	••	••
	A11	Season	1	1904-05	1905-06	1906-07	1907-08	1908-09	1909-10	1910-11	1911-12	1912-13	1913-14	1914-15	1915-16	1916-17	10,7-18	1918-19	1919-20	1920-21	1921-29	*1929-30	*1930-31	*1931-32	*1932-33	*1933-34
		!		••	••		••					••					••	!		••		*	*	*	*	*

STREET, STREET,

Table 42

MISCELLANEOUS DISCHARGE MEASUREMENTS

By courtesy of F. C. Finkle

Da	ate	: : Stream		Discharge secft.
Mar. 2	7, 1905	: Mojave River	: South line of Rancho Verde, : south line of Sec. 36, : T.5 N., R.4 W., S.B.M.	168 : 168
Nov. 2	1, 1906	:Mojave River	:At Rancho Verde Upper Diver- : sion, in Sec. 25, T.5 N., : R.4 W., S.B.M.	11.1
Nov. 20	6, 1904	:Nojave River	:Upper Narrows (Victorville)	24.0
		:Mojave River	:Upper Narrows (Victorville)	: 1090
Nov. 2	1, 1906	:Mojave River	:Upper Narrows (Victorville)	39.0
		:Mojave River	:Lower Narrows	41.0
Mar. 13	3, 1905	:Mojave River	:Lower Narrows	a 15900
		:Mojave River	:Lower Narrows	234
Nov. 2.	1, 1906	:Mojave River	:Lower Narrows	49.7
Mar. 13	3, 1908	:Mojave River	:Point of Rocks gaging station: below Helendale	111
Mar. 1	3. 1905	:Mojave River	: (b 3200
		:Mojave River	Point of lava mountains,	278
Nov. 2	2, 1906	:Mojave River	i mile west of Barstow	3.0
Mar. 2	5, 1905	:Mojave River	:Below diversion of Mineola : Cut, opposite Yermo	235
Mar. 13	3. 1905	:Mojave River	:(Last bridge & Union Pacific	b 1840
		:Mojave River	:(R.R., 40 miles below :(Daggett	
Nov. 20	0, 1906	:Grass Valley Croek	:Above Coles Diversion Dam	0.6
			:Arrowhead gaging station	2.3
		:	:ঠ mile above junction with : West Fork	165
		:	:Arrowhead gaging station :	7.8
			:Arrowhead gaging station :	0
Mar. 1	э, тө⊖ө	: west fork mojave kiver	:300-500 feet below Arrowhead : gaging station :	219900
Mar. 28	3, 1905	:West Fork Mojave River	:Arrowhead gaging station	96.7
Nov. 20	0, 1906	:West Fork Mojave River	:Arrowhead gaging station :	0.4
Dec. 2	1, 1906	:West Fork Mojave River	: 200 feet above Arrowhead : gaging station :	27.2
		:	:	

	7		
-			
1011			-1,1,1
	11,1-12-11		
	_ 1 11 11 11 11 11		
	- 111 1		
	1 1 1 1 1 1 1		
	10111		- 2.
			766 1 7 100
			000 11 -50
			10 1 A 1900
			- 1 1
			- 11 II
	A STATE OF THE REAL PROPERTY.		
	-1.00		
			-1,0,00
	-1-1 - 34,47.5 1		
	A Second of		
	. — Consumo Sinsi / — An	11000	2 . 1 (4)
		·	F-1. F1.45
	-		
	-11-1		
	The same of the same of		A
100,25			
-			
	Company and the same of		

Table 42, continued

MISCELLANEOUS DISCHARGE MEASUREMENTS

		:		:Discharge
Do	te	: Stream	: Locality	: secft.
		:	:	;
Nov. 27	, 1904	:Hesperia Ditch	:Near waste gat in Sec. 7,	: 2.5
		:	: T.3 N., R.3 W., S.B.M.	:
Mar. 28	3, 1905	:Hesperia Ditch	:Opposite forks of Mojave	: 1.9
		:	: River in Sec. 18, T.3 N.,	:
		:	: R.3 W., S.B.M.	:
Nov. 20), 1906	:Hesperia Ditch	:Near waste gate in Sec. 7,	: 2.7
		:	: T.3 N., R.3 W., S.B.M.	:
		:	;	:
Nov. 21	., 1906	:Rancho Verde Diversion	n:Flume from Slough on west	: 1.3
			: side of Rancho Verde at	:
			: bridge in Sec. 14, T.5 N., : R.4 W., S.B.M.	
		•	. Rot no, Sedemo	•
Nov. 22	1906	· Cvanide Plant Pumpino	At culvert in dam at Cyanide	. 0.8
110 / 4 22	, 1000	: Diversion from	· · · · · · · · · · · · · · · · · · ·	:
		: Mojave River		:
Nov. 22	2, 1906	:Inflow to Majave		: 0.1
		: River	: Plant entering river.	:
		:	:	:
Mar. 25	, 1905	:Mineola Cut Diversion	:Opposite Yermo	: 2.5
		: from Mojave River	:	:
		:	:	:

a Mean of three sections to high water marks calculated by Kutter's Formula.

b Calculated from high water marks by Kutter's Formula.
c Mean of six sections to high water marks calculated by Kutter's Formula.

Later Street Street

COMMENT OF THE PARTY.

100000	244		-
57	Tarrie British	0.10 24112	BULLOW HOL
10-11			1,1,-
11 1			0.015
			F
940			
-			
		17-12-20-13	

Table 43

Records of Water Levels at Wells

The wells for which water level records are presented are in or near the area influenced by the Mojave River. Unless otherwise noted the measurements were made by the Division of Water Resources or by the United States Geological Survey.

U-1

Olive, formerly West

Location and description: Southeast corner of NW, of NE, Sec. 13, T.3 N., R.4 W.S.B.B. M, on top of bluff at west side of road from West Fork saddle to bottom of McInnis crossing.

Use: Domestic.

Reference Point: Top of 2" x 12" board cover on well at ground level. Plevation of reference point: 3012.5.

THE RESERVE AND ADDRESS.			:	Dist. F.P. to	-:-		and the state of t	The server of	:	Dist. P.P. to
	Da	te	:	water surface	:	Date			:	Water surface
			:		:				:	
May	15,	1322	:	*69.8	:	Mar.	4,	1931	:	79.0
Jan.	11,	1923	:	*68.6	:	May	1,	1931	:	78.0
Sept.	27,	1923	:	*71.9	:	Nov.	13,	1031	:	88.7
Oct.	18,	1923	:	*69.7	:	Jan.	7,	1932	:	81.9
Dec.	6,	1929	:	84.9	:	Feb.	20,	1932	:	80.1
Mar.	5,	1930	:	80.5	:	Mar.	18,	1932	:	79.3
Apr.	1,	1.930	:	79.3	:	June	9.	1932	:	77.9
Apr.	21.	1930	:	78.7	:	/ug.	9.	1932	:	78.8
nec.	11.	1930	:	81.0	:	Nov.	3.	1932	:	84.8
Jan.		1831	:	79.8	:	Dec.	,	1933		89.7

* Measurement from W. P. Rowe.

U-2

A. M. Page

Location and Description: Middle of south line SE, Sec. 12, T. 3 N, F.4 W., S. B.R. M., near orange colored houses between ed e of bluff and road to Lake Arrowhead.

Use: Domestic and Irrigation.

Reference Point: Concrete floor level at average ground elevation. Plevation of reference point: 3012.1.

	Dε	te	•	st. F.P. t ter surfac		Γ	ate			F.P. to surface	
Dec. Jan. Mar. May July	27, 4, 1,	1931 1931	: : : : : : : : : : : : : : : : : : : :	92.8 67.8 86.6 85.6 87.1	:	Nov. Jan. Feb. Mar. /ug.	7, 20, 18,	1932 1932 1232	:	94.0 £9.9 87.1 86.0 £4.8	



U-3

Martin McInnis.

Location and Description: Near northwest corner of SW_{4}^{1} , Sec. 7, T.3 N., R.3 W., S.B.B.& M., on east side of Mojave River at Upper or McInnis crossing, 12 feet west of ditch.

Use: Domestic.

Reference Point: Top of 12 inch spiral wrap casing level with average ground.

Elevation of reference point: 2953.1

	Do. 4 -		Dist. R.P. to		D-	+-		Dist. R.P. to
Date		: water surface		: Date			<u>:</u>	water surface
Feb.	,	:	*7;5		0		:	9.4
Jan. Mar.		:	29.7 12.0	:		-	:	17.4 26.77
Mar. Mar.		:	11.2 9.6	:		•	:	30. dry 12.2
Apr.	14, 1930	:	7.3 8.2	:	Feb. 19 Mar. 18	, 1932	:	7.4 7.4
Apr. Apr.	30, 1930	:	7.6	:	Apr. 19	, 1932	:	7.2
Jan. Feb.		:	19.3 13.4	:	July 7 Nov. 3	•	:	8.2 24.8
Feb.	20, 1931	:	11.9	:			:	

^{*} Mojave River Commission Report.

U-4

Location and Description: Near center of SE_4^1 , Sec. 12, T.3 N., R.4 W., S.B.8.8 M. On west side of Mojave River just above McInnis crossing.

Use: Stock windmill.

Reference Point: Top of 2" x 12" cover on concrete pit 36 inches in diameter.

Elevation of reference point: 2955.4

Date		ist. R.P. to ater surface]	Date			Dist. R.P. to water surface
Dec. 6,1929 Mar. 8, 1930	: :	25.9 dry 8.4		May				8.4 20.8
Apr. 1, 1930 Apr. 12, 1930	:	8.3 8.1		Oct. Jan.	•			27. dry 8.8
Apr. 21, 1930 Dec. 11, 1930	:	8.5 15.1		Feb. Mar.	_			7.6 7.8
Jan. 27, 1931 Feb. 20, 1931	:	14.3 8.6	:	June Aug.	9,	1932	:	7.5 14.9
Mar. 4, 1931	:	8.7	:	Nov.	3,	1932	:	25. dry

The later of the l

				1						
	1.1									
9-2-	:				••	-				
5.74	;		i.	•			100			
•			**		• (etc. 10			
• •		1000			7200					
	:				9.75		27 42	m		
					5.0					
160					9 9					

The State of the S

25)) ·		

[1-4A

William P. Lang

Location and Description: Fear south line of SE2, Sec. 1, T.3 N., F.4 V., S. 7.8.8 M. West of U-4 and near county road.

Use: Irrigation.

Peference Point: Top of 2 inch curb at southwest corner 2 feet above ground.

Elevation of reference point: 2942.1.

	Date	. ,	F.P. to surface	•		Date)		Dist. R.F. to water surface
Feb.	7, 1932 20, 1932 18, 1932	:	17.2 12.4 14.3	:	June Aug. Nov.	4,	1932	:	16.4 21.3 48.7

U-5

Location and Description: Near center of east line of SW, Sec. 1, T.3 N., R.4 W., S. V.H.A M., at foot of hill near Hendrick's north line.

Use: Test well. Reference Point:

Elevation of reference point: 2929.1

	: Dist. F.P. to		: Dist F.F. to
Date	: water surface	. Date	: water surface
- ,	: * 27.2 : * 12.1	Jan. 27, 1931	: 26.2 dry :

* Arrowhead Feservoir and Fower Co. records. Lowest and highest observations (Mar. 1909 - Feb. 1920). P.V.U.S.L. Testwell No. 1.



U-6

M. Spranger

Location and Description: Near center of east line of SW2 /Sec. 6, T.3 N., F.3 N., S.R.P.& M. Past side of Mojare River at hendgate of Laughlin Pitch.

Feference Point: Top of 12 inch casing. Plevation of reference point: 2929.3.

and design the second second	Nate		F.P. to surface	-:- -:-		Date			Dist. R.P. to water surface
Apr. Dec. Dec. Apr. Apr. Apr. Apr. Apr. Apr. Eeb.	21, 1930 30, 1930	: *	6.5 28.3 27.0 3.0 2.9 3.0 2.9 27. dry 3.9	:	Aug.	20, 1, 4, 8, 15, 19, 15,	1931 1931 1931 1932 1932 1932	:	3.5 3.4 26.7 27. dry 4.5 3.0 2.8 2.8

^{*} Arrowhead Reservoir and Power Co. records. Highest and lowest observations (Feb. 1905 - Apr. 1930). Formerly Old Welsh Place.

U-7

Booth and Argus

Location and Description: Year center of east line of NE of NV . Sec. 1, T.3 N., R.4 W.. S.R.P.& M. Old pumping plant in hole on east side of road to Labe Arrowhead, above concrete house at bend in road. Feference Point: Hole in suction for vacuum gage 5.0 feet below average ground.

Flevation of reference point: 2921.2.

	Date	-	Dist. F.P. to water surface			Date			Dist. F.P. to water surface
Jan. Mar. Tar.	16, 1930 17, 1930 22, 1930 14, 1930	:	28.3 28.0	:	Jan. Mar. May July	4,	1931 1931 1931 1931	:	18.2 19.0 19.1 14.5



U-7 A

Location and Description: In NVI, Sec. 1, T.3 P., R.4 V., S.V.B.& V. Windmill on hill at house on west side of road.

Use: Domestic.

Reference Point: Fdge of sutomobile hood around casing level with top of iron foundation legs of windmill, 1.6 feet above ground. Elevation of reference point: 2948.8.

	Date		Pist. F.P. to water surface	•		ist F.D. to ater surface
Jan. May Jan.		:	58.4 50.7 57.0		Feb. 20, 1932 May 18, 1932	42.6 38.3

U-8

Laughlin

Location and Description: Near northwest corner of SE, Sec. 31, T.4 N., F.3 W., S.B.3.8 P.

Reference Point: Top of 14 inch casing with concrete plug 2 feet above average ground.

Elevation of reference point: 2019.5

	Date		Dist. F.D. to water surface	•	Date	-	Dist. F.P. to water surface
Jan.	3, 1909	:	* 44.3 * 14.5 43.2 41.2	:	Mar. 3, 1931 May 1, 1931 July 28, 1931 Jan. 15, 1932	:	3 7. C 34.9

^{*} Lowest and highest observations (Dec. 1904 - Mar. 1914) from records of Arrowhead Feservoir Co.

- 1 • . 1. 1 • . 171 . 7 . × . - 11-

U-16

N. F. Marsh

Location and Description: Near center of south line of \mathbb{NW}_{4}^{1} of \mathbb{SE}_{4}^{1} , Sec. 20, T.4 N., R.3 W., S.B.B.& M. In pump house north of Hesperin - Bear Valley Road.

Use: Irrigation and domestic.

Reference Point: Outer edge of $1\frac{1}{2}$ inch water line at union.

Elevation of reference point: 2971.0

	Date		ist. R.P. to vater surface		•	Date			Dist. R. P. to water surface
	28, 1931	: : :	122.2 123.8	:	Mer. May July Sept.	5, 15,	1932 1932	:	121.5 118.1 115.1 116.2
Feb.	19, 1932 18, 1932	:	124.6	:	Mar. Dec.	3,	1933	:	120.1 121.4

U-17

W. O. Wade

Location and Description: In southwest corner of NE_4^1 of NE_6^2 , Sec. 21, T.4 N., R.3 W., S.B.B.& M.

Use: Not used.

Reference Point: Top of curb at ground level.

Elevation of reference point: 3100.5

	Da	te			R.P. to surface	:		Date		:	Dist. R.P. to water surface
Mar.	1.	1917	:	*	242.0	:	Mar.	25.	1932	:	256.8
		1923	-		247.6		Apr.	,			255.6
Jan.	31,	1930	:		255.7	:	June	2,	1932	:	254.1
Dec.	17,	1930	:		255.0	:	July	20,	1932	:	253.0
Mar.	10,	1931	:		255.7	:	Sept.	13,	1932	:	253.0
May	11.	1931	:		256.6	:	Mar.	2,	1933	:	254.6
Aug.	4,	1931	:		257.2	:	Dec.	21,	1933	:	255.4
Jan.	20,	1932	:		258.0	:	May	17,	1934	:	256.5

^{*} Mojave River Commission Report.

^{**} Measurement from W. P. Rowe.

			31	n pn n	
	•				, contra
rea era	- (= 5	110
7,013	•				9.1
-44 0 V		200		Post Sin	. 1

and the second	· · · · · · · · · · · · · · · · · · ·		- pro-unit		
	almit.	- The sta		,	
	1 -11 - 20			All of	-7-
4					
		7			
The same		à		4 4 1	. 1
		7.00			
9,750	4 100 3 300	0 1			
	I AME AND ADDRESS.	, ,			
,	1 4 7 7	Cumi			

AND REAL PROPERTY AND REAL PROPERTY.

M. Rudelson

Location and Description: In southeast corner of Sec. 10, T.4 N., R.3 W., S. B. & M.

Use: Irrigation and Domestic.

Reference Point: Top of concrete pump base at hole in tin at southeast corner 1.4 feet above floor.

Elevation of reference point: 3092.1

	Date	•	Dist. R.P. to water surface	Date			Dist. R.P. to water surface
Jan. Dec. Jan. Mar.	25, 1930 17, 1930 27, 1931 10, 1931	:	251.7 251.4	Aùg. 4, Jan. 20, Mar. 30,	1932	:	252.5 252.4 252.6

U-18 A

Location and Description: In northeast corner of SE_4^1 of SE_6^1 , Sec. 10, T.4 N., R.3 W., S.B.B.& M. One quarter mile northeast of U-18. Use: Not used.

Reference point: Top of 12 inch casing 1.0 foot above ground.

Elevation of reference point: 3078.8

	Date		R.P. to surface		Dε	ate			Dist. R.P. to water surface
Aug. Jan.	26, 1932	:	238.6 238.0 239.0 239.2	:	June July 2 Mar.	28,	1932	:	239.1 239.2 238.5

U-19

E. D. S. Pope

Location and Description: Near southwest corner of $NW_{\frac{1}{4}}^{\frac{1}{2}}$ of $SW_{\frac{1}{4}}^{\frac{1}{2}}$, Sec. 1, $\overline{1.4}$ N., $\overline{R.3}$ W., $\overline{S.8.8.8}$: M.

Reference Point: Top of concrete slab, 0.4 feet below ground. Elevation of reference point: 3044.0

	Dat	е		st. R.P. to ter surface			Date			Dist. R.P. to water surface
Tow	71	1020	:	202 7	:	B.F. and	70	1029	:	203.7
Jan.			:	202.7	-			1932		
Dec.	17,	1930	:	202.4	:	Apr.	29,	1932	:	203.2
Mar.	11,	1931	:	202.8	:	June	2,	1932	:	202.6
May	13,	1931	:	203.5	:	July	28,	1932	:	202.4
Aug.	4,	1931	:	204.2	:	Mar.	2,	1933	:	202.4
Jan.	26,	1932	:	204.2	:				:	

H. E. Walsh

Location and Description: Near southwest corner of Sec. 6, T. 4 N., R.2 W., S. B. & M.

Use: Not used.

Reference Point: Top concrete floor of pump house.

Elevation of reference point: 3133.2

	Date		ist. R. P. t nter surface			Date			Dist. R.P. to water surface
		:		:				:	
Feb.	13, 1923	:	*283.5	:	Lug.	4,	1931	:	289.4
Jan.	31, 1930	:	287.1	:	Jan.	26,	1932	:	289.4
Dec.	17. 1930	:	287.7	:	Apr.	29.	1932	:	289.4
Mar.	3, 1931	:	289.0	:	July	28.	1932	:	289.5
May		:	289.0	:	.,			:	

^{*} Measurement from W. P. Rowe.

U-21

A. B. Sheridan

Location and Description: In southwest corner of Sec. 5, T.4 N., R.2 W., S. B. B. & M.

Use: Not used.

Reference Point: Top of 12" casing 2.5 feet above ground.

Elevation of reference point: 3085.5

	Date	e		Dist. R.P. to water surface	:		Date			Dist. R.P. to water surface
			:		:				:	
Feb.	13,	1923	:	* 232.8	:	Aug.	4.,	1931	:	236.7
Jan.	31,	1930	:	235.7	:	Jan.	26,	1932	:	237.1
Dec.	17.	1930	:	236.3	:	Apr.	29,	1932	:	237.2
Mar.	3.	1931	:	236.5	:	July	28.	1932	:	237.2
May	-		:	236.6	:	Mar.	2,	1933	:	237.2
+ Nfm. m		L		W D Down						

^{*} Measurement from W. P. Rowe.

U-22

A. L. Martin

Location and Description: Near south line of SE_{4}^{1} of NE_{4}^{1} , Sec. 5, T.4 N., R.2 W., S.B.B.8 M.

Use: Not used.

Reference Point: Top of casing at ground level.

Elevation of reference point: 3043.4

	Date		ist. R.P. to ater surface	-		Date		-	Dist. R.P. to water surface
Dec. Mar.	31, 1930 17, 1930 3, 1931	:	181.9 181.8	:	Jan. Apr. July	29, 28,	1932 1932	:	182.8 182.4 182.2
May Aug.	13, 1931 4, 1931	:	181.9 182.0	:	Feb.	17,	1933	:	182.4

April 1 Line

(-l-.)

1 1

AND RESIDENCE OF THE PARTY OF T

The second secon

and the second second

26.00.00		0 40			nub de	
	الاستنانا		DOLLAR	-	115	
14500	.1		1.03			
1950	1 = 1=		. •			
1	1-5-5	7				. 1
		-	• •		5	

U-23

C. W. McLester

Location and Description: Near center of south line of $NE_{\ell}^{\frac{1}{2}}$, Sec. 19, T.4 N., R.3 W., S.B.B.& N. Reference Point: Top of 10 inch casing under clamps and galvanized

iron, 0.5 feet below concrete curb at average ground.

Elevation of reference point: 2890.0

	Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
m-h	26 1017	* 22.7	: 	38.2
Feb. Jan.	26, 1917		: Jan. 15, 1932 : Feb. 19, 1932	•
Feb.	12, 1931		: Apr. 19, 1932	
Feb.	20, 1931		: June 2, 1932	
May	1, 1931	: 35.9	: Sept. 13, 1932	: 27.6
July	28, 1931	: 37.0	: Nov. 3, 1932	: 30.0

^{*} Mojave River Commission Report.

U-25

M. Hughes

Location and Description: In northeast corner of SW4, Sec. 17, T.4 N., R.3 W., S.B.B.& M.

Reference Point: Bottom of clamp across top of concrete curb at ground level.

Elevation of reference point: 2926.4

	Date		Dist. R.P. to water surface			Date			Dist. R.P. to water surface
Jan. Mar.	27, 1931 10, 1931	:	85.2 85.6	:	July Jan. June	15,	1932	:	93.9 88.5 81.6

^{*} Mojave River Commission Report.



Location and Description: Near northwest corner of SW2, Sec. 17, T.4 N., R.3 W., S.B.B. M., along west side of road from Forks to Narrows.

Use: Test well.

Reference Point: Top of 2 inch coupling on well under plug 0.4 feet above ground.

Elevation of reference point: 2865.6

^{*} Lowest and highest observations (Jan. 1905 - Dec. 1920) from records of Arrowhead Peservoir and Power Co. Test well No. 8.

** Measurement from W. P. Rowe.

U-27

Location and Description: Near northwest corner of NE_4^2 of SW_4^2 , Sec. 18, T.4 N., R.3 W., S.B.B.& M., 300 feet south and 20 feet east of Evens southeast fence corner.

Use: Test well.

Reference Point: Top of 2 inch courling, 0.3 feet above ground. Elevation of reference point: 2869.2

	Date	•	R.P. to : surface :		Dat	e	-	Dist. R.P. to water surface
		•	:	_			:	
Jan.	28, 1905	: * 28	3.4	July	28,	1931	:	28.0
May	13, 1911	: * 7	7.0:	Oct.	8,	1931	:	29.2
Jan.	18, 1930	: 27	.8 :	Feb.	19,	1932	:	10.5
Apr.	3, 1930	: 15	: 3	Mer.	25,	1932	:	7.7
Jan.	28, 1931	: 26	3.1 :	Sept	13,	1932	:	18.7
Feb.	12, 1931	: 26	3.5 :	Nov.	3,	1932	:	21.0
Fcb.	20, 1931	: 26	S.7 :	Dec.	21.	1933	:	27.3
May	1, 1931	: 25	5.8	May	17,	1934	:	26.2

^{*} Lowest and highest observations (Jan. 1905 - Dec. 1930) from records of Arrowhead Reserveir and Power Co. Test well No. 9.

The state of the s

	-		114		
100 100 100 100 100 100 100 100 100 100			1 1		

7 -11

,			

	Table In	
1 -1 . 1 - 1		
7 7 7 1	7.0	1.4
		100,1

C. O. Evans

Location and Description: Near southeast corner of SW2 of MV2, Sec. 18, T.4 N., E.3 W., S.R.& M., east side of reservoir.

Use: Irrigation.

Reference Point: Hole in nump base for air line 1.0 foot above ground.

Elevation of reference point: 2867.6

		: Dist. R.P : water sur		Date		Dist. R.b. to water surface		
Feb.	12, 1931 20, 1931	: 29.5 : 29.2 : 29.3 : 30.3	: Jan. : Fob. : Mar. : May	8, 1931 15, 1932 19, 1932 25, 1932 5, 1932 13, 1932	:	31.8 31.5 27.0 22.6 21.8 25.0		

U-28 A

Location and Description: Near center of south line of $NW_2^{\frac{1}{2}}$, Sec. 18, T.4 N., F.3 W., S.B.B.& M. 5 foot concrete pit with windmill south of reservoir.

Use: Domestic.

Reference Point: At ground.

Elevation of reference point: 2867.1

	Date			R.P. to surface	:		Date			Dist. R.P. to water surface
Jan. Jan.	18, 1 28, 1	931 :	: 2	26.2	:		15,		:	26.7 27.2
Feb. Feb. May July	12, 1 20, 1 1, 1 28, 1	931 :	* 2	24.8 25.0 28.5 27.0	:	Feb. Mar. May	,	1932 1932 1932	:	13.0 7.6 7.0

* Windmill pumping.

-					
		-01-		-	-

			05.0	in.	1	-	
					- 27		

			•			-
						1776
		5,75				-047
-		. Tell		7		1000
9.0				-1	4	

Actual District

U-29

Zeiger

Location and Description: Near southwest corner of NW, of NW, Sec. 17, T.4 N., R.3 W., S.B.S.& N.

Use: Domestic.

Reference Point: Top of ragged 14 inch casing 2.7 feet above top of casing joint at ground level.

Elevation of reference point: 2864.2

	Date		Dist. R.P. to water surface			Date			Dist. R.P. to water surface
Feb.	25, 1917	:	* 23.1	:	Mon	24	1022	:	28.9
					Mar.		1932		
Dec.			28.6		Apr.	-	1932		27.2
Feb.	17, 1931		29.2		June	-			25.1
Feb.	20, 1931		29.2	:	July	20,	1932	:	25.7
May	1, 1931	:	29.9	:	Sept.	13,	1932	:	25.4
July	28, 1931	:	31.2	:	Nov.	3,	1932	:	26.1
Jan.	15, 1932	:	31.5	:	May	17,	1934	:	29.6
Feb.	19, 1932	:	31.1	:				:	

^{*} Mojave River Commission Report.

U-30

Location and Description: Near center of east line of SW_2^1 of SE_7^1 , Sec. 18, T.4 N., R.3 W., S.B.B.& M.

Reference Point:


Elevation of reference point: 2870.6

	Date		st. E.P. to ter surface			Date	•	Dist. F.P. to water surface
May	1, 1931	:	24. dry	:	May	5, 1932	:	23.5

U-31

Location and Description: In center of east line of SE_4^1 of SW_4^1 , Sec. 5, T.4 N., R.3 W., S.F.B.& M.
Reference Point: Top of iron clamp on timbers across casing in pit 3.2 feet below concrete at ground level.
Elevation of reference Point: 2999.5

	Date		st. F.P. to ter surface	•		nate			Dist. R.P. to water surface
Jan. Mar. May Aug.	27, 1931 6, 1931 7, 1931 4, 1931	:	168.9 169.0 169.3 170.0	:	Mar. June July	2,	1932	:	169.6 168.3 169.0

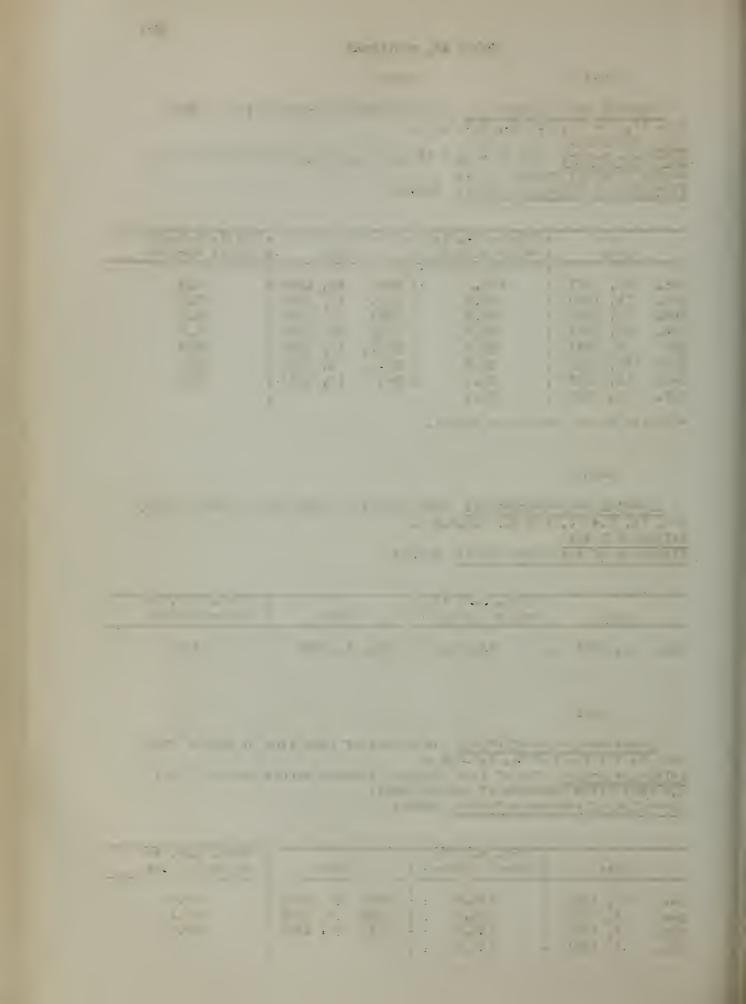

U-32

Marianna Panch

Location and Description: In southwest corner of Sec. 9, T. 4 N., R.3 V., S.3.B.& M.

Use: Irrigation:

Reference Point: Top of concrete curb on east at average ground level. Elevation of reference point: 3034.5

	Date	: Dist. R.P. to : water surface		: Dist.P.D. to : water surface
Mar.	1, 1917	: * 186.2	: : Jan. 27, 1931 : July 28, 1931	

* Mojave River Commission Report.

U-33

Old Hunt Place

Location and Description: In southeast corner of SW_4^1 , Sec. 10, T.4 N., R.3 W., S.B.B.& M.

Use: Domestic.

Reference Point: Edge of opening over "M" in Pomona on north side at air line 0.5 feet above concrete pump base at ground level. Elevation of reference point: 3061.1

	Date	-	Dist. R.P. to water surface	:		Date		-	Dist. R.P. to water surface
Jan. Mar.	27, 1931 10, 1931				- 0	•	1931 1931		221.5 221.8

U-34

C. G. Lewis

Location and Description: In southwest corner of $NW_{\frac{1}{4}}^{\frac{1}{4}}$ of $SE_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 7, T.4 N., F.3 W., S.P.B.& M.


Use: Irrigation.

Reference Point: Top of old wood curb 0.15 feet below new pump hase at ground level.

Elevation of reference point: 2857.4

	Date		st. R.P. to ter surface			Date	e	:	Dist. F.P. to water surface
May Jan. Jan. Feb. Feb. May July Oct.	20, 1931	: : :	*11.1 24.0 23.5 23.6 23.7 24.4 25.5 25.9	: : : : :	Mar. May July	19, 25, 13, 20,	1932 1932 1932 1932 1932	:	25.8 24.5 21.7 18.8 19.4 21.2 24.1

^{*} Mojave River Commission Report.

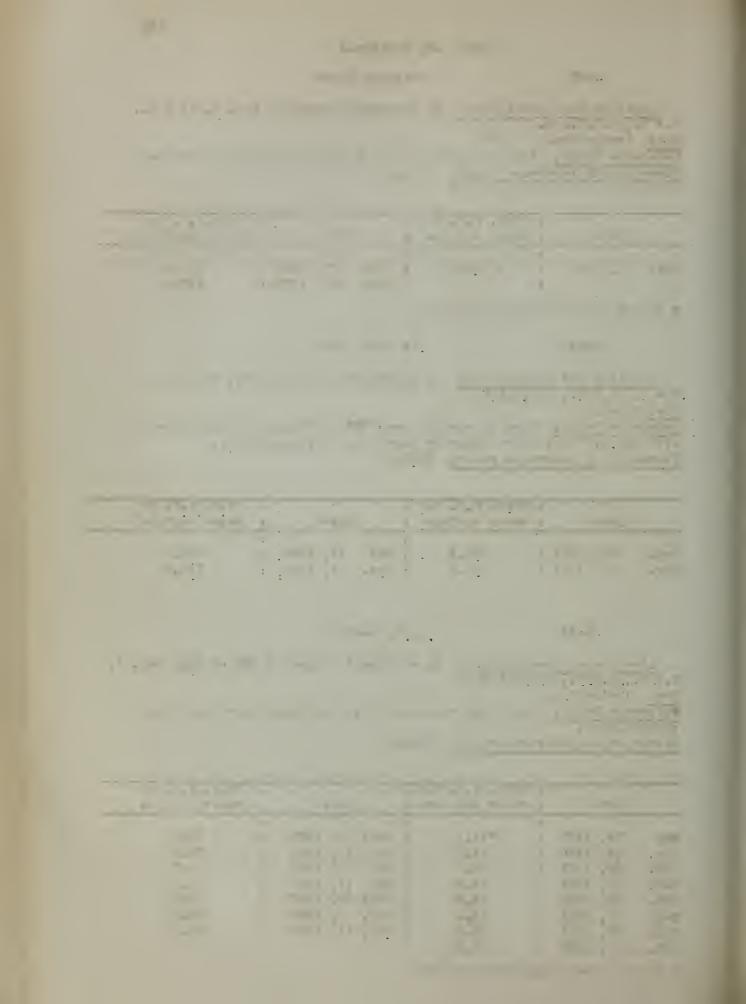

Carden

Location and Description: Near center of west line of Sec. 7, T.4 M., R.3 W., S. 7.3 & M.

Reference point: Too of concrete curb on west side at ground level, under discharge.

Elevation of reference point: 2853.6

	Date		ist. F.P. to ater surface			Date	9		Dist. P.P. to water surface
		:		:				:	
Jan.	30, 1931	:	22.8	:	Nov.	17,	1931	:	24.7
Feb.	14, 1931	:	22.7	:	Feb.	19,	1932	:	21.0
Feb.	20, 1931	:	22.7	:	Mar.	25,	1932	:	18.7
May	7, 1931	:	23.8	:	May	5,	1932	:	15.9

U-36

Location and Description: Near center of north line of NE3, Sec. 12, T.4 N., R.4 W., S.2.8.8 M.

Use: Test well. Feference Point:

Elevation of reference point: 2847.4

	Pate			R.P. to surface			Dat	e	:	Dist. R.P. to water surface
Jan.	28, 1905	:	*	23.2	:	Apr.	5,	1907	:	* 11.4

* Lowest and highest observations (Jan. 1905 - April 1910) from records of Arrowhead Reservoir and Power Co. Test well No. 3, replaced by Test well No. 3 A in April, 1910.


U-37

Location and Description: Near northwest corner of SE_2^1 of SE_2^1 , Sec.1, T.4 N., F.4 W., S.B.8.8 M.

Use: Irrigation.

Feference Point: Edge of opening in pump head 0.95 feet above base of pump and 2.5 feet above average ground level. Elevation of reference point: 2843.3

	Date		Dist. P.P. to water surface	-		Date			Dist. F.F. to water surface
Jan.	23. 1930	:	18.6	:	Jan.	15.	1932	:	19.7
Jan.	28, 1931		19.1	:	Feb.	19,	1932	:	16.6
Feb.	,	:	19.1	:	Mar.	,	1932		15.0
Feb.	20, 1931	:	19.1	:	Nov.	3,	1932	:	17.3
Nov.	18, 1931	:	20.2	:	Dec.	21,	1933	:	19.1

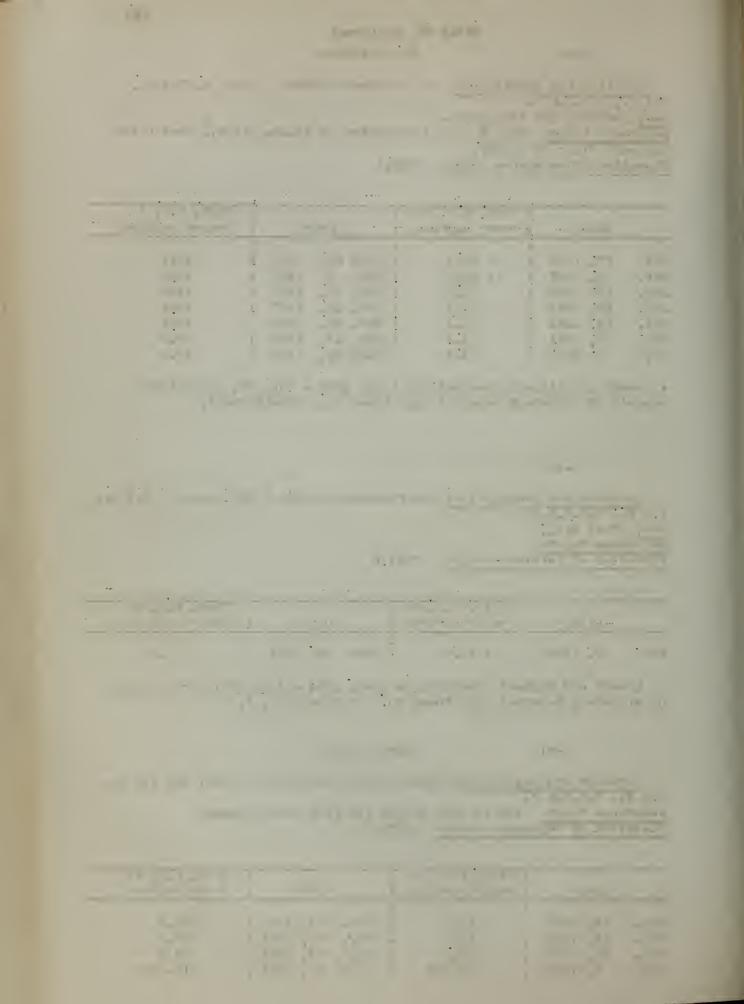

U-42

Location and Description: Near center of north line of NE, Sec. 1, T.4 N., R.4 W., S.B.B.& M.

Use: Test well.

Reference Point: Top of well.

Elevation of reference point: 2822.8

	Nate		ist. R.P. to rater surface	•		Date				R.P. to surface	
Jan.	2, 1905	:	* 11.8	:	Jan.	31,	1916	:	*	6.4	

* Lowest and highest observations (Dec. 1904 - Dec. 1920) from records of Arrowhead Feservoir and Power Co. Test well No. 6

U-43

A. W. Phillips

Location and Description: Near northeast corner of $NW_{4}^{\frac{1}{4}}$ of $NW_{4}^{\frac{1}{4}}$, Sec. 6, T.4 N., R.3 W., S.3.B.& M.


Use: Domestic.

Reference Point: Crack in windmill foundation 0.5 feet above concrete block at casing level and 1.5 feet above ground. Elevation of reference point: 2873.0

	Date		Dist. R.P. to water surface			Date	\	:		R.P. t	
v	24, 1917 25, 1930 26, 1931 17, 1931 7, 1931 28, 1931	: : :	56.3 56.2 56.1 56.8	: : :	Feb. May July Sept. Oct. Nov.	27, 20, 13, 8,	1932 1932 1932 1932	: : : : : : : : : : : : : : : : : : : :	* *	56.9 56.3 56.2 56.3 56.2 55.8	
Nov.	18, 1931				Dec.		1933			56.3	
	7, 1932 ve River C		57.3 ssion Report.	:	May	17,	1934	:	* *	57.6	

^{*} Mojave River Commission Report.

** Windmill pumping.

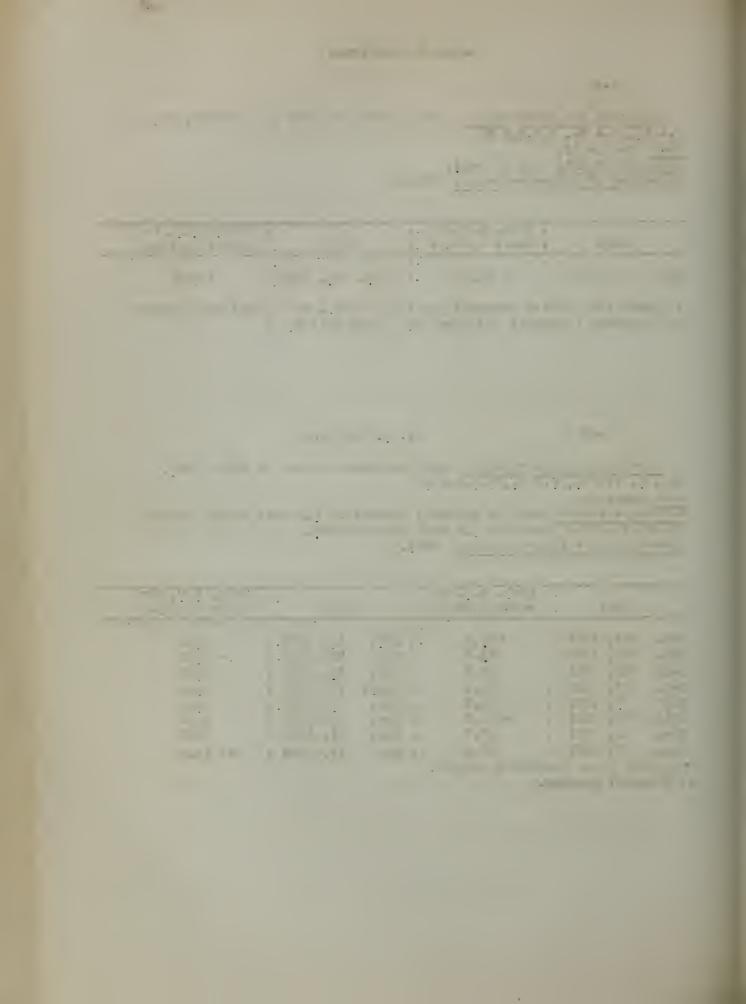

A. J. Lintner

Location and Description: Near northeast corner NW7 of NE7, Sec. 6, T.4 N., R.3 W., S.B.B.& M.

Use: Domestic.

Elevation of reference point: 2872.4

	Date	9		ist. F.P. to ater surface	-]	Date			Dist. R.P. to water surface
Jax.	26	1931	:	54.2	:	Feb.	19	1932	:	55.2
Feb.	•	1931		54.2	-	Mar.	•			54.4
May	7,	1931	:	55.2	:	May	27,	1932	:	54.1
Aug.	4,	1931	:	56.6	:	Sept.	13,	1932	:	54.5
Nov.	18,	1931	:	55.7	:	Nov.	3,	1932	:	53.8
Jan.	7,	1932	:	55.4	:	May	17,	1934	:	55.5

U-45

Ihmsen

Location and Description: Near southeast corner $NE_{4}^{\frac{1}{2}}$ of $SW_{2}^{\frac{1}{2}}$, Sec. 32, T.5 N., R.3 W., S.B.B.& M.

Use: Domestic and irrigation.

Reference Point: Top of coupling on \(\frac{1}{4} \) inch air line, level with lower floor which is 1.0 foot below main floor level.

Elevation of reference point: 2995.7

	Date		Dist. R.P. to water surface	-	· · · · · · · · · · · · · · · · · · ·	20	R.P. to surface
Ť	0.00	:	3.00.0	:	:		
Jan.	27, 1931	:	169.9	:	:		

U-46

Conwell

Location and Lescription: Near southeast corner of $NE_{\zeta}^{\frac{1}{2}}$ of $SE_{4}^{\frac{1}{2}}$. Sec. 33, T.5 N., R.3 W., S.B.B.& M.

Use: Domestic.

Reference Point: Top of edge of opening in pump head over "M" in Pomona 0.31 feet above top of casing which is 0.6 feet above ground. Elevation of reference point: 2986.5

	Date	: Dist. R.P. to : water surface	*	: Dist. R.P. to : water surface
Jan.	26, 1931	: 150.2	: Aug. 4, 1931	
Mar.	4, 1931	: 150.2	: Jan. 7, 1932	
May	12, 1931	: 151.4	: Mar. 24, 1932	



U-47

Pacific Farm Lands Co., formerly E. P. Deweys.

Location and Description: Near southeast corner of NW_4^1 of NW_4^1 , Sec. 31, T.5 N., F.3 W., S.B.R.& M.

Use: Domestic and irrigation.

Reference Point: Top of hole in pump base on north side 0.33 feet above

floor level and 1.33 feet above ground level.

Elevation of reference point: 2855.7

	Date			R.P. to surface			Date	Э		Dist. R.P. to water surface
		:		0.0	:		0.0	7.080	:	70 C
Jan.	17, 19	05 :	*	27.3	:	Dec.		1930		30.6
Feb.	10, 19	05 :	*	27.0	:	Jan.	30,	1931	:	30.6
Feb.	22, 19	05:	*	26.7	:	Mar.	12,	1931	:	30.3
Mar.	2, 19	05 :	*	26.4	:	May	7,	1931	:	31.3
Mar.	18, 19	05 :	*	26.8	:	July	28,	1931	:	32.2
Apr.	8, 19	05 :	*	26.0	:	Jan.	15,	1932	:	32.0
Feb.	24, 19		**	24.8	:	Mar.	24,	1932	:	29.6
Feb.	1, 19			29.9	:	July	20,	1932	:	29.9

^{*} From Arrowhead Reservoir and Power Co. records corrected for change in reference point.

U-48


Location and Description: Near southwest corner of $SE_4^{\frac{1}{2}}$ of $SW_2^{\frac{1}{2}}$, Sec. 30, T.5 N., R.3 W., S.B.B. M. Reference Point: Northeast corner at top of concrete floor around pit 0.2 feet above ground.

Elevation of reference point: 2850.6

	Date	-	Dist. R.P. to water surface	_		Date	Э	_	Dist. P.P. to water surface
		:		:				:	
Feb.	24, 1917	:	* 55.3	:	Jan.	7,	1932	:	49.5
Feb.	1, 1930	:	49.0	:	Mar.	24,	1932	:	49.0
Dec.	20, 1930	:	49.2	:	June	2,	1932	:	49.2
Mar.	12, 1931	:	48.8	:	July	20,	1932	:	49.4

^{*} Mojave River Commission Report.

^{**} Mojave River Commission Report.

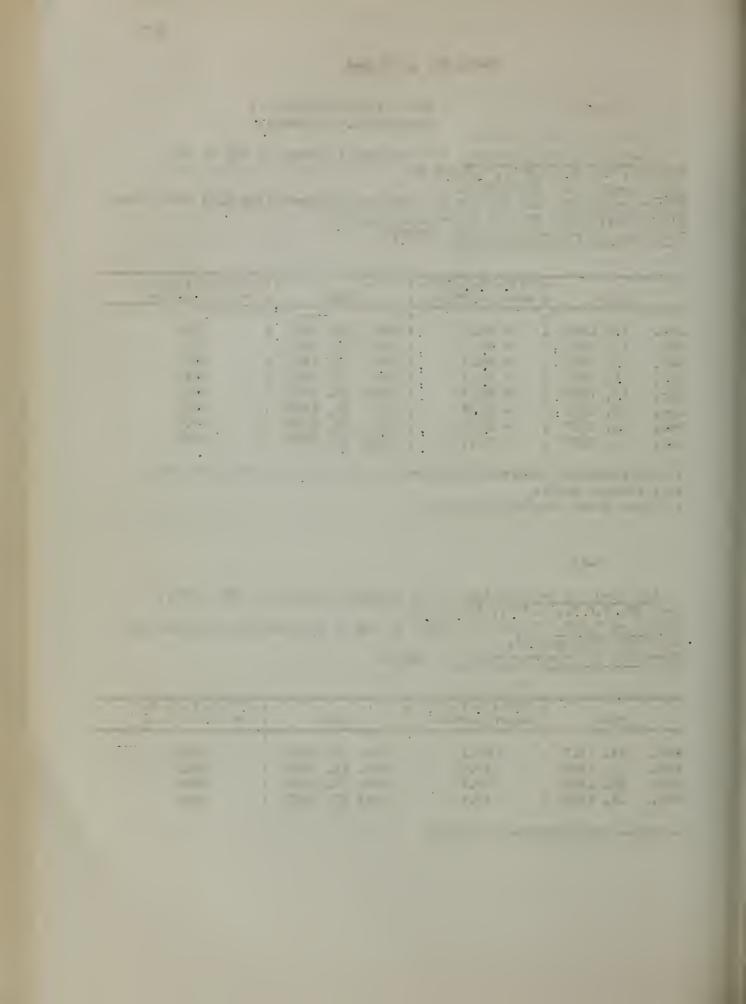

U-49

Formerly Foster's Well

Location and Description: Near center of south line of $NE_c^{\frac{1}{2}}$ of $NE_4^{\frac{1}{4}}$, Sec. 25, T.5 N., R.4 W., S.B.B.& N.

Use: Domestic and Irrigation.

Reference Point: Top of 2" x 6" plank at north edge of pit 1.25 fect above average ground, to and including /pril 8, 1905; then 12" x 12" stringer on north side of pit.

Elevation of reference point: 2838.5 to and including April 8, 1905, then 2837.5

	Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Feb.	17, 1905 10, 1905 23, 1905 2, 1905 18, 1905	: * 50.0 : * 50.6 : * 50.2	: Apr. 8, 1905 : May 26, 1922 : Jan. 28, 1930 : Jan. 30, 1931 : Mov. 18, 1931	* 48.0 : 50.6 : 50.6

- * From Arrowhead Reservoir and Power Co. records.
- ** Measurement from W. P. Rowe.


U-50

Clarke Shaw

Location and Description: Fear center of east line of NE $\frac{1}{4}$ of NW $\frac{1}{4}$, Sec. 24, T.5 N., R.4 V., S.5.B. N. Reference Point: Ton 16 inch casing 0.3 feat above ground. Elevation of reference point: 2816.7

	Date		Dist. R.P. to water surface			Date			Dist. K.P. to water surface
Feb. Dec.	17, 1917 1, 1930 20, 1930	:	53.3 53.4	:	Jan. Mar. May	22, 27,	1932 1932	:	53.4
May July	7, 1931 28, 1931				Nov.	2,	1932	:	53.5

^{*} Mojave River Commission Report.

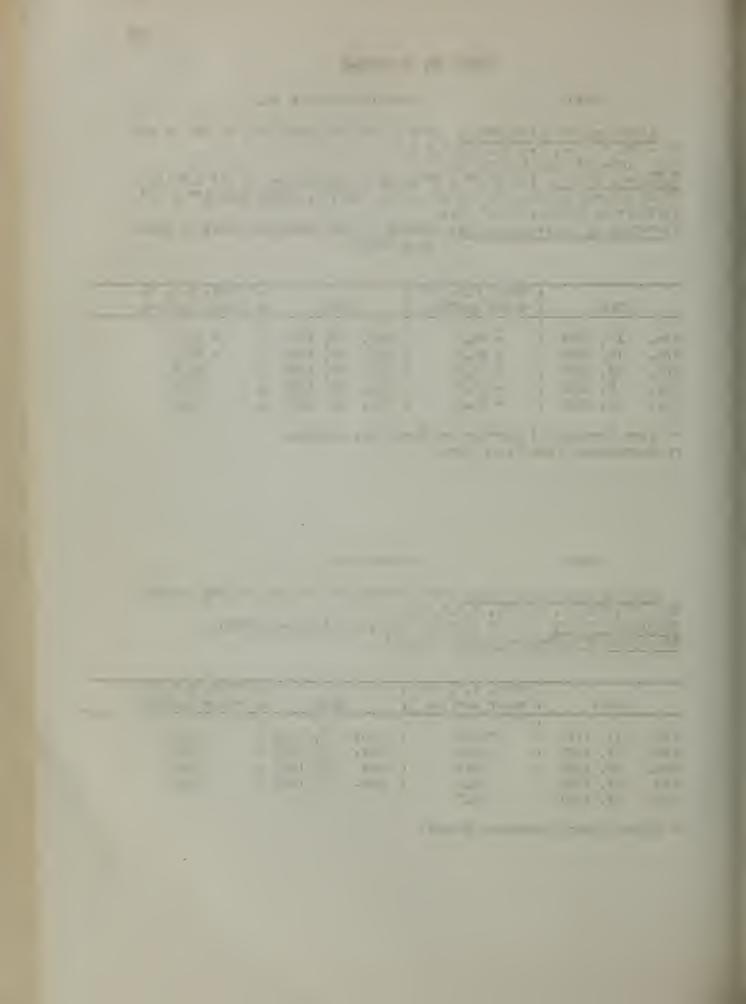

U-51

R. O. Sperry

Location and Description: In northeast corner of SE_3^1 , Sec. 26, T.5 N., P.3 W., S.B.B.& M.

Use: Not used.

Reference Point: Top of 2" x 12" cover on pit 0.2 feet above ground. Elevation of reference point: 2938.1

	Da	te	-	Dist. R.P. to water surface	-		Date	e		Dist. R.P. to water surface
Mar.	2,	1917	:	* 97.8	:	May	14,	1931	:	99.9
Feb.	13,	1923	:	** 98.2	:	Aug.	3,	1931	:	100.0
Jan.	31,	1930	:	99.5	:	Apr.	29,	1932	:	100.2
Jar.	30,	1931	:	99.9	:	Feb.	17,	1933	:	100.6

- * Mojave River Commission Report.
- ** Measurement from W. F. Rowe.

U-52

Location and Description: Near center of west line of $NW_4^{\frac{1}{4}}$, Sec. 24, T.5 N., R.3 W., 20 feet north of old dug well and 40 feet north of rubble masonry reservoir.

Use: Not used.

Reference Point: Top of un-riveted 12 inch casing 1.3 feet above ground. Elevation of reference point: 2920.2


	Date	: Dist. k.P. to : water surface	•		Dist. R.P. to water surface
	30, 1931		: Apr. 29,		82.6
May Aug.	14, 1931 3, 1931		: Feb. 17,	1933 :	82 . 8

U-52 A

Location and Description: Near center of west line of $SE_4^{\frac{1}{2}}$, Sec. 14, T.5 N., R.3 W., S.B.B.& M. $\frac{1}{2}$ mile northwest of U-52. Feference Point: Top of 4" x 4" on east side under two 2" x 10" timbers. Elevation of reference point: 2915.7

	Date	: Dist. F.P. to : water surface	• • • • • • • • • • • • • • • • • • • •
Mar. Jan. May	3, 1917 30, 1931 14, 1931	: 78.9	: Aug. 3, 1931 : 79.1 : Apr. 29, 1932 : 79.2

^{*} Mojave River Commission Report.

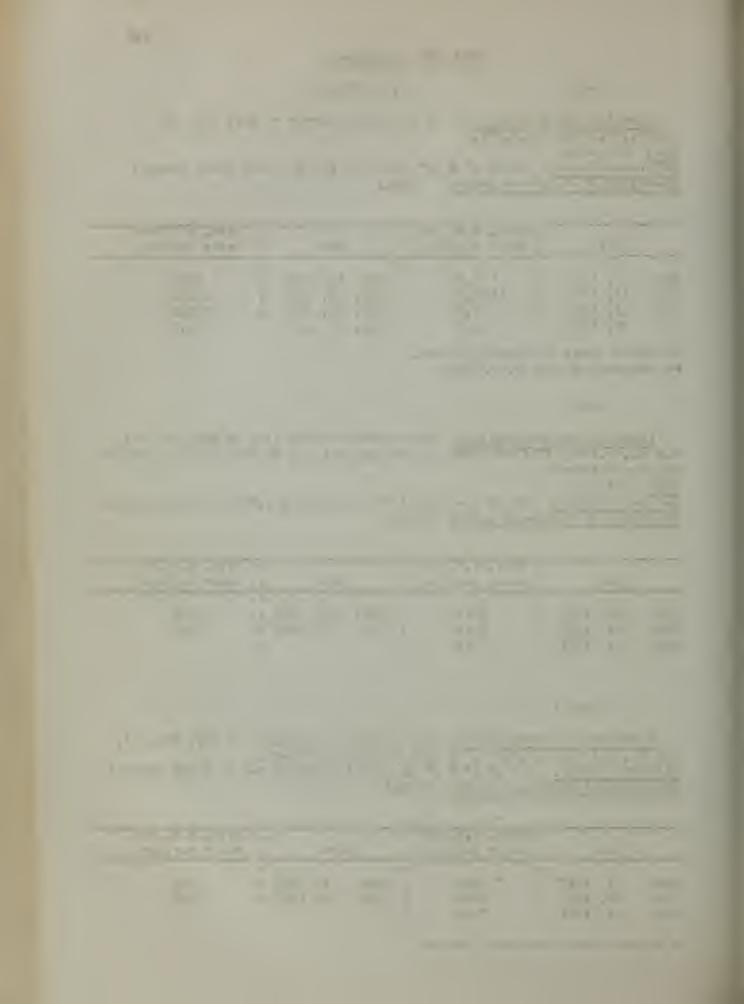

U-53

Location and Description: Near northwest corner of $SW_{\overline{q}}^{\frac{1}{2}}$ of $SE_{\overline{q}}^{\frac{1}{2}}$, Sec. 22, T.5 N., R.3 W., S.B.B.& M. Reference Point: Top of wood curb on north side 0.3 feet above ground. Elevation of reference point: 2938.3

	Date		Dist. R.P. to water surface			Date		Dist. R.P. to water surface
Mar.	2, 1917	:	*101.9	:	Mav	14, 1931	:	103.7
	13, 1923					3, 1931		103.8
Jan.	31, 1930	:	103.4	:	Apr.	29, 1932	:	104.1
Jan.	30, 1931	:	103.6	:			:	

- * Mojave River Commission Report.
- ** Measurement from W. P. Rowe.

U-54

F. A. Fletcher

Location and Description: In northeast corner of $SE_4^{\frac{1}{4}}$, Sec. 9, T.5 N., R.3 W., S.B.B.& M.

Use: Not used.

Reference Point: Top of 7 inch casing 0.5 feet above ground. Elevation of reference point: 2909.2

	Date	-	Dist. R.P. to water surface		Date		Dist. R.P. to water surface
Dec.	28, 1917 31, 1930 17, 1930 30, 1931	:	* 77.9 76.2 76.3 76.3	:	May 14, 1931 Aug. 3, 1931 Apr. 29, 1932	:	76.4 76.5 76.7

* Mojave River Commission Report.

U-55

Location and Description: Near center of west line of SE_4^1 , Sec. 9, T.5 N., R.3 W., S.B.B.& M. Reference Point: Top 12" x 12" timber across pit 1.0 foot above ground. Elevation of reference point: 2919.1

	Date	-	Dist. R.P. to water surface	-	Date		Dist. R.P. to water surface
Jan. Dec.	5, 1917 31, 1930 17, 1930 30, 1931	:	88 .8 88 . 9	:	May 14, 1931 Aug. 3, 1931 Apr. 29, 1932 Feb. 17, 1933	:	89.0 89.0 89.1 89.2

^{*} Mojave River Commission Report.

Location and Description: Near center of $SW_{\frac{1}{4}}^{\frac{1}{4}}$ of $SW_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 8, T.5 N., R.3 W., S.B.B.& M.

Reference Point: Top of old concrete base south of well and also level with top of old pump base, 1.8 feet above ground and 6.48 feet above top of dummy head in pit.

Elevation of reference point: 2925.7

	Date	•	Dist. R.P. to water surface	•	· ·	 R.P. to surface
		:		:	:	
Jan.	20, 1931	:	106.1	:	:	

U-57

Location and Description: In NW2, Sec. 18, T.5 N., R.3 W., S.B.B.& M. In old pumphouse.

Reference Point: Top of broken concrete pipe 1.0 foot above ground and 7.25 feet above top of steel casing.

Elevation of reference point: 2910.4

	Date	: Dist. R.P. to : water surface		: Dist. F.P. to : water surface	
Feb. Feb. Jan. Jan. May	13, 1923 25, 1930	: * 98.0 : ** 104.2 : 106.7 : 106.7 : 107.5	: Aug. 3, 1931 : Apr. 29, 1932 : July 28, 1932 : Mar. 2, 1933	106.7 106.6	

- * Mojave River Commission Report.
- ** Measurement from W. P. Rowe.

U-58


Location and Description: Near center of Sec. 18, T.5 N., R.3 W., S.B.B.& M., 300 feet north of old wood four leg windmill tower with mill and galvanized iron tank.

Reference Point: Top of wood curb on west 0.1 feet above ground. Elevation of reference point: 2938.0

	Date				R.P. to			Date			Dist. R.P. to water surface
			:			:				:	_
Feb.	27,	1917	:	*	138.0	:	May	15,	1931	:	134.2
Feb.	13,	1923	:	**	133.6	:	Aug.	3,	1931	:	134.2
Jan.	25,	1930	:		133.9	:	Apr.	29,	1932	:	134.2
Jan.	30,	1931	:		134.2	:	July	28,	1932	:	134.3

^{*} Mojave River Commission Report.

^{**} Measurement from W. P. Rowe.

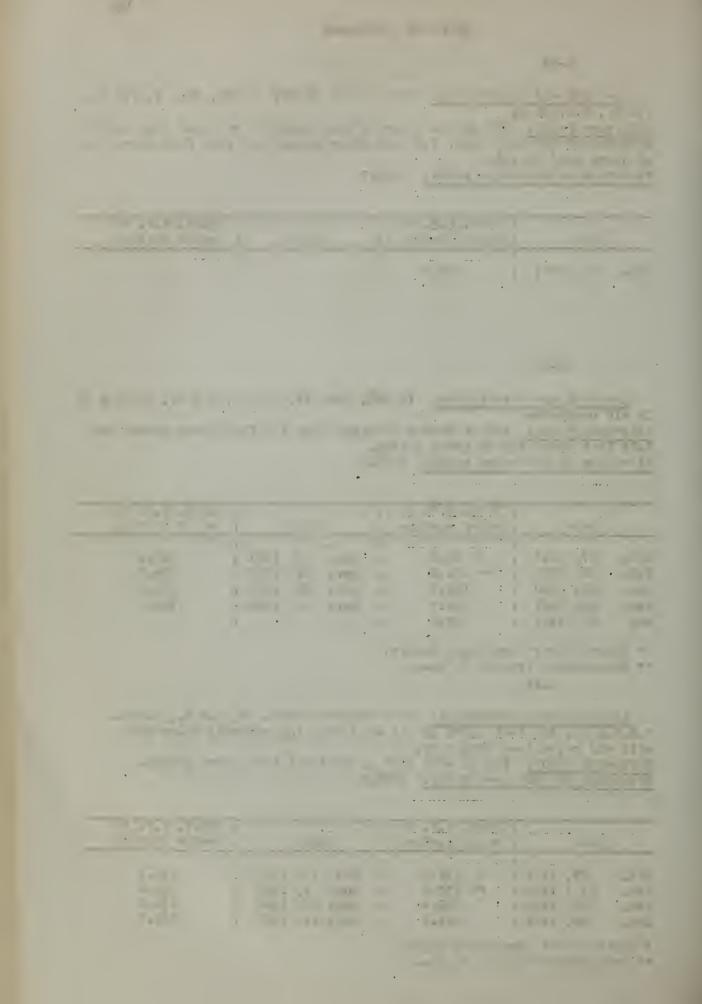

Lee Saul

Location and Description: 1000 feet northwest of St corner of Sec. 11 T.5 N., R.4 W., S.B.B.& M.

Use: Domestic.

Reference Point: Top of 8 inch O.D. casing 2.6 feet above ground. Elevation of reference point: 2788.3

	Date	_	Dist. R.P. to water surface		D	ute		Dist. R.P. to water surface
		:		:			:	
Jan.	30, 1	931 :	56.4	:	Nov.	12,	1931:	55.9
Feb.	14, 1	931:	55.8	:	Mar.	22,	1932:	55.3
May	14, 1	931 :	55.8	:	June	15.	1932:	55.2
July	28, 1	931 :	56.1	:		,	:	

U-59 A

Location and Description: Approximately 400 feet east of U-59.

Reference Point: Hole in pump base 0.1 feet above concrete base, 0.4 feet above ground.

Elevation of reference point: 2791.0

	Date		ist. R.P. to vater surface		D	ate			Dist. R.P. to water surface
Jan. May July	30, 1931 22, 1931 28, 1931	:	29.7 31.3 29.8	:	Nov. Mar. June	22,	1932	:	28.9 27.9 27.6

U-61

Location and Description: In SW_4^1 , Sec. 10, T.5 N., R.4 W., S.B.B.& M. Windmill on Hill in Victorville.


Use: Domestic.

Reference Point: Top of well cover 2.15 feet above concrete floor at ground level.

Elevation of reference point: 2767.6

	Date	ist. R.P. to water surface		De	ıte	Dist. R.P. to water surface
Dec.	20, 1930 15, 1931	45.6 45.7	-	Nov. June	12,1931 15,1932	46.0 * 45.7

^{*} Windmill pumping.

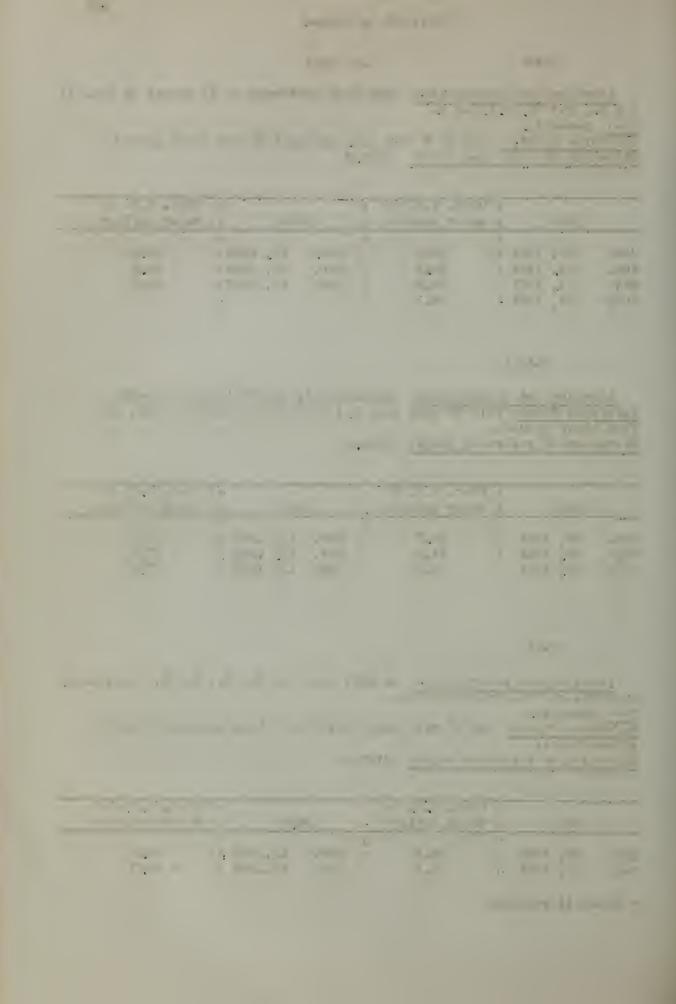

U-62

Verde Ranch

Location and Description: Near center north line of NW_4^1 , Sec. 15, T.5 N., R.4 W., S.B.B.& M. Near dairy and bunk houses.

Use: Domestic

Reference Point: Ground surface.

Elevation of reference point: 2765.0

	Date	 R.P. to surface			Date		Dist. R.P. to water surface
Apr. Feb.	12, 1917 19, 1930		:	Мау	15,	1931 :	Flowing

* Mojave River Commission Report.

U-63

Location and Description: Near center of south line of SE¹/₄, Sec. 16, T.5 N., R.4 W., S.B.B.& M.

Reference Point: Top of casing at concrete pump base 0.7 fcet above ground.

Elevation of reference point: 2848.9

	Date	: Dist. P.P. to : water surface	: Dat		Dist. R.P. to water surface
Feb. Feb.	24, 1917 1, 1930 19, 1930	: 33.1	Dec. 2 May 1	0, 1930: 5, 1931:	33.1 33. dry

* Mojave River Commission Report.

U-64

E. Wagner


Location and Description: In northwest corner of NE_{4}^{1} of NW_{4}^{1} , Sec. 27, T.5 N., R.4 V., S.B.B. & M.

Use: Domestic.

Reference Point: Top of 6" x 10" timber across unlined pit 1.0 foot above ground.

Elevation of reference point: 2860.0

	Date		Dist. R.P. to water surface			Date		:	Dist. R.P. to water surface
	10 1070	:	CA 2	:	NT	17	1021	:	67 2
Feb.	19, 1930				Nov.				63.2
Jan.	26, 1931	:	62.8	:	Feb.	20,	1932	:	63.2
May	25, 1931	:	65.6	:	Dec.	20,	1933	:	63.3
Aug.	4, 1931	:	66.4	:				:	

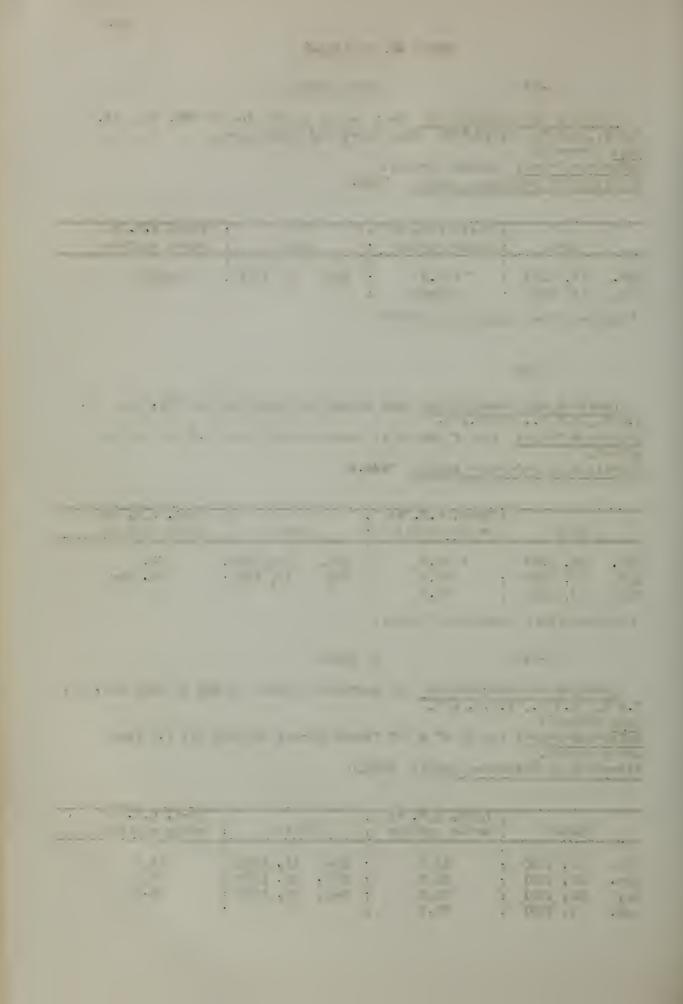

U-65

Location and Description: Near center of east line of SV_2^1 , Sec. 26, T.5 N., R.4 W., S.B.B.& M., in draw above Rig Cottonwood - Bee Panch. Use: Domestic.

Reference Point: Top of west curb at ground level. Hole at pipe inlet. Elevation of reference point: 2806.4

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Apr. 3, 1930 Jan. 28, 1931	: : 17.5 : 17.3	: May 15, 1932 : Nov. 12, 1932	

U-66

Verde Ranch

Location and Description: Near center of SE_4^1 , Sec. 26, T.5 N., R.4 W., S.B.3.8 M. West side of road down cottonwood lane through ranch, northwest of U-67.

Reference Point: Top of 10 inch casing 3.0 feet above ground. Elevation of reference point: 2792.9

Date	: Dist. R.P. to : water surface	•	Đ	ate		Dist. R.P. to water surface
1, 1930 28, 1931	: 5.6 : 5.3		May Nov.	-		5.7 6.2


U-67

Verde Ranch

Location and Description: In center of $SE_{\frac{1}{4}}$, Sec. 26, T.5 N., R.4 W., S.B.B.& M., South of U-66.

Reference Point:
Elevation of reference point: 2792.1

 Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
28, 1931 15, 1931	: Flowing : Flowing	: : Nov. 12, 1931	: Flowing

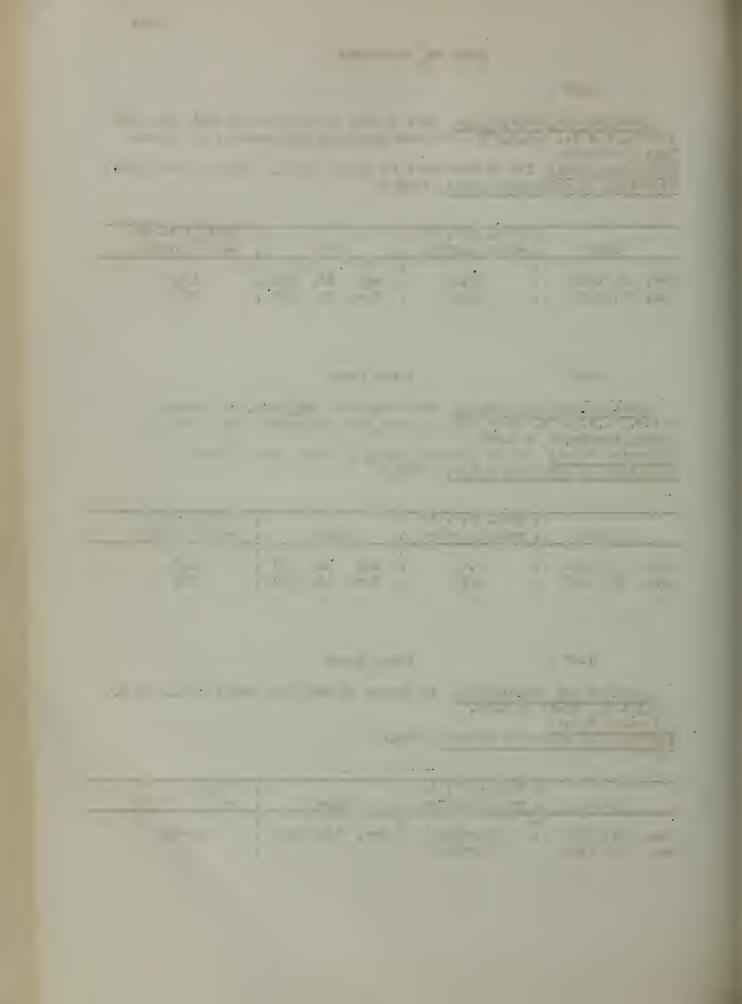

U-68

Sorenson

Location and Description: Near northwest corner of NE₄ of NE₄, Sec. 35, T.5 N., R.4 W., S.3.8.8 M.

Reference Point: One-quarter inch fittings on wood cap 2.0 feet above ground level.

Elevation of reference point: 2804.3

	Date		Dist. R.P. to water surface		Date		Dist. R.P. to water surface
Apr. Feb.	12, 1917 19, 1930		*Flowing +10.		May 15, 193 Nov. 12, 193		_
Jan.	28, 1931	:	Flowing	:		:	

^{*} Mojave River Commission Report.

U-69

Location and Description: Near northeast corner of NE¹/₄ of NE¹/₄, Sec. 35, T.5 N., R.4 W., S.B.B.& M. Second uppermost flowing well on ditch east of well at milk house and east of road.

Reference Point: Top of wood plug in well one-quarter inch bushing 1.0 feet above ground.

Elevation of reference point: 2802.9

	Date	Dist. R.P. to water surface		Date		Dist. R.P. to water surface
-	19, 1930 28, 1931		:	Nov. 12, 1931	:	Flowing

U-70

Location and Description: Near center of NE $\frac{1}{4}$ of NE $\frac{1}{4}$, Sec. 35, T.5 N., R.4 W., S.B.8.8 M. Uppermost flowing well on ditch. Water flows out of old six inch discharge of pump. Not capped. Reference Point: Center line of 6 inch discharge flange on old pump, $\overline{2.0}$ feet above ground. Elevation of reference point: 2806.0

	Date	•	Dist. R.P. to water surface	_	D	ate		•	Dist. R.P. to water surface
Feb.	19, 1930	:	+7.5	:	Jan.	28,	1931	:	+5.8

1 - 1

17-4

U-71

Location and Description: Near center east side of Sec. 35, T.5 N., R.4 W., S.B.B. & M. Pumping plant east of road.

Use: Irrigation.

Reference Point: Top of 4" x 6" at floor level in southwest corner of pit, 0.5 feet above ground.

Elevation of reference point: 2813.9

	Date		ist. R.P. to ater surface	:	Date	•	Dist. R.P. to water surface
Apr.	12, 1917	:	* 4.0	:	Apr. 3, 1930	:	9.6
Feb.	1, 1930	:	9.7	:	Jan. 28, 1931	:	9.5

* Mojave River Commission Report.

U-72

Location and Description: Near southwest corner of Sec. 36, T.5 N., R.4 W., S.B.B.& M.

Use: Irrigation.

Reference Point: Top 2 inch wood curb on west side of pit 0.2 feet above ground.

Elevation of reference point: 2824.8

	Date		Dist. R.P. to water surface			Date		:	Dist. R.P. to water surface
		:		:				:	
Apr.	12, 1917	:	* 4.0	:	Nov.	12,	1931	:	8.0
Feb.	1, 1930	:	6.3	:	Jan.	7,	1932	:	7.4
Apr.	3, 1930	:	6.6	:	Feb.	24,	1932	:	5.8
Jan.	28, 1931	:	8.4	:	Apr.	29,	1932	:	6.0
Feb.	14, 1931	:	8.4	:	Sept.	13,	1932	:	7.8
Feb.	20, 1931	:	8.3	:	May	24,	1933	:	5.3
May	2, 1931	:	9.4	:	Dec.	21,	1933	:	6.2
Aug.	4, 1931	:	10.6	:	May	17,	1934	:	6.9
Oct.	8, 1931	:	8.5	:				:	

^{*} Mojave River Commission Report.



Location and Description: Near northwest corner of Sec. 1, T.4 N., R.4 W., S.B.E.& M. In Mojave River bottom just above Rancho Verde. Use: Test well.

Reference Point: Top of well.

Elevation of reference point: 2825.3

		_	Dist. R to	:		:	Dist. R.P. to
	Date	:	water surface	:	Date	:	water surface
		:		:		:	
Jan.	2, 1905	:	* 15.9	:	Apr. 1, 1920	:	* 10.3

* Lowest and highest observations (Dec. 1904 - Dec. 1, 1920) from records of Arrowheed Reservoir and Power Co. Test well No. 5.

U-74

Paul Shroeder

Location and Description: Near center of south line of $SW_c^{\frac{1}{2}}$ of $SW_c^{\frac{1}{2}}$, Sec. 35, T.5 N., R.4 W., S.B.B.& M. At curve in road on hill from Verde Ranch to railroad, alongside road under box. Reference Point:

Elevation of reference point: 2931.7

	Date	_	Dist. R.P. to water surface	•	Date	Dist. R.P. to water surface
Feb.	19, 1930 26, 1931		112.5 112.7		Sept. 13, 193 Mar. 24, 193	113.8
May Apr.	12, 1931 29, 1932	:	112.9		Dec. 21, 193	113.2

U-75

Location and Description: Near center north line of $NE_{\zeta}^{\frac{1}{2}}$ of $NW_{\frac{1}{4}}^{\frac{1}{2}}$, Sec. 12, T.4 N., R.4 W., S.B.& M. At mouth of draw, 30 feet east of road.

Use: Test well.

Reference Point: Top of well.

Elevation of reference point: 2840.0

	Date	: Dist. R.P. to : water surface		: Dist. P.P. to : water surface
May Jan.	29, 1916 26, 1931	: * 18.2 : * 9.3 : 15.6 dry : 15.4	: May 22, 1931 : Oct. 8, 1931 ; Jan. 7, 1932 : Apr. 29, 1932	: Dry

^{*} Lowest and highest observations (Dec. 1904-Dec. 1920) from records of Arrowhead Reservoir and Power Co. Test well No. 4

U-75 A

Location and Description: 600 feet west of U-75.

<u>Use:</u> Test well.

<u>Reference Point:</u> Top of pipe 1.5 feet above ground.

<u>Flevation of reference point:</u>

 Date		oist. R.P. to vater surface	Date	•	Dist. R.P. to water surface
26, 1931 12, 1931	:	13.7	Oct. 8, 1931 Jan. 7, 1932	:	12.7 12.3
22, 1931	:	13.2	Apr. 29, 1932	:	11.3

U-76

Location and Description: Near center of south line of $NW_4^{\frac{1}{2}}$ of $NE_{\frac{1}{4}}^{\frac{1}{2}}$. Sec. 13, T.4 N., R.4 W., S.B.8.8 M. Domestic well on power line at edge of wash east of house at Cottonwoods.

Use: Domestic.

Feference Point: Top of concrete pump base of plunger pump. Elevation of reference point: 2862.4

	Date		R.P.to surface	-	Date	-	R.P. to er surface
Jan. Mar. May	26, 1931 12, 1931 22, 1931	:	25.5	: Jan.	8, 1931 7, 1932 29, 1932		27.5 27.2 20.5

U-77

Location and Description: In NE_{4}^{1} of SE_{4}^{1} , Sec. 13, T.4 N., R.4 W., S.B.B.& M. 23 feet north of fifth power pole below transformer pole at end incl.

Use: Probably A.L. & W. Co. test well.

Reference Point: Top of 2 inch pipe under cap, 1.0 foot above ground. Elevation of reference point: 2868.9

	Date		st. R.P. to ter surface	:	D	ate		-	Dist. R.P. to water surface
Jan.	25, 1930	:	21.3 dry	:	Jan.	26,	1931	:	21.3 dry

		100	

		1777	
	-1		
148			1000
		31	

	*		27 17 1
		1 4 4 7	

7776	-,-				-		-
-			-			3.5	
	4 0						.0-7
,		2 (1)	900 1	1,000			

			100	
		12,	 	
			1-1-1-1	

	1 777 - 117 -	
100		

U-78

Lacey

Location and Description: Near center of $SE_4^{\frac{1}{4}}$ of $SE_4^{\frac{1}{4}}$, Sec. 13, T.4 N., R.4 W., S.B.B.& M.

Use: Irrigation.

Reference Point: Top of one-quarter inch pipe for air line 0.83 feet above top of concrete pump base which is 0.4 feet above ground. Elevation of reference point: 2871.9

	Date		er surface	•		Date	•	Dist R.P. to water surface
Jan.	26, 1931	:	29.9	:	Jan.	7, 1932	:	32.4

U-79

Location and Description: Near center of $SE_{4}^{\frac{1}{2}}$, Sec. 19, T.4 N., R.3 W., S.B.B.& M.

Reference Point:
Elevation of reference point: 2891.2

	Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Mar.	6, 1917	: *12.6	: : Jan. 28, 1931	: 26.0 dry

^{*} Mojave River Commission Report.

secretaries and second

	1
201000	14

	15-0
	100000000000000000000000000000000000000

41-1-11	1 1000	-	-
	-		

M-1

Berger Service Station.

Location and Description: In center of $NW_{\frac{1}{4}}^{\frac{1}{4}}$ of $SW_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 29, T.6 N., R.4 W., S.B.8 M. Casing in dug pit in rear of service station.

Use: Domestic.

Reference Point: Top of railroad tie curb at ground level.

Elevation of reference point:

	Da	te		ist. R.P. to			Date			Dist. P.P. to water surface
Sent.	4	1930	:	8.7	:	Nov.	12	1031	:	8.6
	-			٤.2		Jan.	•			8.6
Apr.	3,	1931			:	Feb.	23,	1932	:	7.1
May	20,	1931	:	8.6	:	June	1,	1932	:	8.5
Aug.	5,	1931	:	8.2	:	Sept.	7,	1932	:	8.0
Oct.	2,	1931		8.7	:				:	

M-2

Adelanto Mutual Water Co.

Location and Description: Near center of east line SW1, Sec. 30, T.6 N., P.4 w., S.E.R.& M. 100 feet north of Booster Plant.

Use: Not used.

Reference Point: Top of 16 inch casing 3.0 feet above top of wood curb of pit at ground level.

Elevation of reference point:

Date	: Dist. P.P. to : water surface	•	Dist R.P. to water surface
Dec. 12, 1930 pr. 3, 1931 May 15, 1931	: 12.8 : 11.6 : 11.9 : a 11.5	: Oct. 2, 1931 : Nov. 12, 1931 : Mar. 4, 1932 : June 1, 1932 : Nov. 15, 1932 :	11.7 10.0 11.2

a - Pumping nearby.

-				
				-0 4
		111		

10.11		77.75	1
141	-		- ,
			MEET IN
79			- 257 2

	 	• •
71 400	F-11	
2	66	101 10 101
3 2		100

M-3

John Bennette

Location and Description: In $SW_{\frac{1}{4}}$ of $NE_{\frac{1}{4}}$, Sec. 19, T.6 N., R.4 W., S.B.B.& M. Near water the south of cottages.

Use: Domestic

Reference Point: Top of 1 inch well curb at ladder 2.5 feet above

ground.

Elevation of reference point:

	Dai	te			R.P. to			ate				P.P. to surface	
Sept. Dec. May Aug. Nov.	12, 20, 5,	1930 1931 1931	:	а	18.3 18.9 19.4	:	Jan. Feb. June Sept. Jan.	23, 1, 7,	1932 1932 1932	:	ณ ล	19.0 20.8 22.4 19.8 18.6	

a - Windmill pumping slowly.

M-4

Arrowhead Lake Company

Location and Description: Near southwest corner of Sec. 7, T.6 N., R.4 W., S.B.B.& M. In rear of two story house near water tank. Use: Domestic.
Reference Point: Top of board cover at pump base 1.3 feet above ground.

Reference Point: Top of board cover at pump base 1.3 feet above ground. Elevation of reference roint:

Da	te		Dist. R.P. to water surface			ate			Dist. R.P. to water surface
Sept. 4, Mar. 31, May 20, Aug. 5, Oct. 2,	1931 1931 1931	:	21.0 21.4 22.0	: :	Nov. Jan. Feb. June Sept.	14, 23, 1,	1932 1932 1932	:	21.2 20.8 20.4 21.4 22.4

The second secon THE RESERVE AND THE RESERVE AND ADDRESS OF THE PARTY ADDRESS OF THE P 1.2 HH1 ----. 10 10 111 SUE I = , . . The state of the s

17 July 12 Tarre. 21 1-1

M-5

W. C. and A. R. Buckbee

Location and Description: Near southwest corner of NW_4^1 , Sec. 6, T.6 N., R.4 W., S.B.B.& M.

Use: Domestic.

Reference Point: Top of 7 inch casing under wor clamp, 0.6 feet

above ground.

Elevation of reference point:

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Apr. 3, 1931	: 20.5 : 19.2 : 19.2 : 19.8 : 19.6	: Nov. 12, 1931 : Jan. 14, 1932 : Feb. 23, 1932 : June 1, 1932 : Sept. 7, 1932	: 18.2 : 19.1 : a 21.0

a - Windmill pumping slowly.

M-6

Location and Descript n: In $NE_{\frac{1}{4}}$ of $SE_{\frac{1}{4}}$, Sec. 25, T.7 N., R.5 W., S.B.B.& M.

Use: Not used.

Reference Point: Top of 36 inch iron casing in dug pit 13.5 feet below top of 2" x 12" cover at ground level.

Elevation of reference point:

Dat	е		st. R.P. to ter surface			Date			Dist. k.P. to water surface
Lug. 5,	1931	:	5.7 4.0 4.7 6.1 5.3	:	Nov. Jan. Fcb. June Sept.	14, 23, 1,	1932 1932 1932	: :	4.9 3.9 3.5 4.3 5.9

- de la constanta de la consta

THE TALL NAME AND ADDRESS OF THE PARTY OF TH

	 15 JI 1 15		_
		TO SE	475

of bred factor in the	
	1/ N N N N N N N N N N N N N N N N N N N

			us-
754	*	- 10	
76.	1 1 1 1 1		100
47.4			100
0.0	THE R. P. LEWIS CO., LANSING, MICH.	9 7 7	1 77 ,00

M-7

Location and Description: In northeast corner $NW_{\frac{1}{4}}$, Sec. 30, T.7 N., R.4 W., S.B.8.8 M.

Use: Not used.

Reference Point: Top of casing under dummy head of Luetwiler Pump, 0.6 feet above ground.

Elevation of reference point: 2562.1

	: Dist. R.P. to Date : water surface				Date		:	: Dist. R.P. to : water surface		
Sept.	4.	1930	:	57.6	:	Oct.	2.	1931	:	57.8
Oct.			:			Nov.				57.6
Dec.			:	57.4	:	Dec.	23,	1931	:	57.5
Feb.	6,	1931	:	57.2	:	Jan.	27,	1932	:	57.4
Mar.	20,	1931	:	57.3	:	Feb.	23,	1932	:	57.3
Apr.	24,	1931	:	57.3	:	Mar.	23,	1932	:	57.4
May	21,	1931	:	57.3	:	Apr.	21,	1932	:	57.4
July	29.	1931	:	57.9	:	June	1,	1932	:	57.6
Sept.			:	57.8		Dec.		1932		57.7

M-8

Location and Description: In southwest corner SE_4^1 of SW_4^1 , Sec. 19, T.7 N., R.4 W., S.B.B.& M.

Use: Irrigation.

Reference Point: Top of 10" x 12" stringer across pit 1.0 foot above ground.

Elevation of reference point: 2534.8

	Dai	te		Dist. R.P. to water surface		D	ate			Dist R.P. to water surface
Sept.	-		:	35.7 35.4		Oct.	_			35 .7 35 . 6
Dec.	13,	1930	:			Dec.	23,	1931 1932	:	35.6 35.8
Mar.	20,	1931 1931	:	35.4 35.3	:	Feb.	23,	1932 1932	:	35.7 35.7
	21,	1931 1931	•	35.4 35.7	•	Apr.	21,	1932	:	35.6 35.8
Sept.	-	1931	:	35.6	:	Aug.		1932		36.1

741

AND THE RESIDENCE OF THE PARTY
CONTRACTOR OF THE PARTY OF THE

_ O III - O III I O III I O III

-1-1-1	*		. =			-
- 13-11-11				-	-760	
	1					
					- 10	
36.00				9-	10	
						1
				0.0	100 30	,
720	I THE T					
	ATTENDED	4957 11				
	I THE OWNER OF	2011				
	1.716				Del A	
	LUCI					

M-9

Nofferman Bros.

Location and Description: In southwest corner of Sec. 19, T.7 N., R.4 W., S.B.B.& M.

Reference Point: Top of ring at hole for oil line in pump 0.8 feet above bottom of pump base at ground.

Elevation of reference point: 2515.9

	Data		Dist. R.P. to			Dot			Dist. R.P. to
	Date	:	water surface	<u>:</u>		Date	е	<u>:</u>	water surface
		:		:				:	
Dec.	12, 1930	:	27.3	:	Dec.	23,	1931	:	26.1
Feb.	13, 1931	:	26.0	:	Jan.	27,	1932	:	25.1
Mar.	20, 1931	:	31.4	:	Feb.	23.	7 72	:	25.0
Nov.	12, 1931			:		ĺ		:	

M-10

Nofferman Bros.

Location and Description: In southeast corner of Sec. 24, T.7 N., R.5 W., S.B.B.& M.
Reference Point: Top of 2" x 4" at pump base 0.2 feet above ground and 0.5 feet from top of casing on slant.
Elevation of reference point: 2513.5

	Da te	: Dist. R.P. to : water surface			: Dist. R.P. to : water surface
-	12, 1930 13, 1931	•	:	Mar. 20, 1931	28.8

M-11

Location and Description: Near center of south line of $SE_4^{\frac{1}{4}}$ of $SE_4^{\frac{1}{4}}$, Sec. 24, T. 7 N., R.5 W., S.B.B.& M. West edge of field near bank. Use: Not used.

Reference Plant: Top of concrete cover 0.6 feet above ground and 5.5 feet above top of casing in pit.

Elevation of reference point: 2509.2

Date	: Dist. R.P. to : water surface	· ·	Dist. R.P. to water surface
July 29, 1931	: a 18.1 a 17.9 b 14.5 c 14.7 13.6 14.3 17.9 17.5	: Oct. 2, 1931 : Dec. 23, 1931 : Jen. 27, 1932 : Feb. 23, 1932 : Apr. 21, 1932 : July 7, 1932 : Aug. 9, 1932 : Sept. 2, 1932 :	13.7 13.2 12.9 14.4 16.1 17.1

- TAT AND A -- THE REAL PROPERTY AND ADDRESS OF THE PROPERTY AND ADDRESS OF THE PROPERTY ADDRESS OF THE PROPERTY ADDRESS OF THE PROP

1000 0					-
2000	1	Jan 10	30000		
100				1 0 1 .	A ayes
	0 - 1			1 2 1	11 -1
72.0	1			1 11-1	
	1			, ,	

 	-	- 17.00	-	_
the state of the s		-		
		5,000		
				28.0

THE PARTY OF THE P the second of th

The said to

-			
120	1 00000		100 10 -200
		1,011	
100		1501	1 17 - 4
1500	1 10 10 10		ę –
			1 7 1 2

M - 12

Location and Description: In southwest corner of $SE_4^{\frac{1}{4}}$ of $SE_4^{\frac{1}{4}}$, Sec. 24, T.7 N., R.5 W., S.B.B.& M. East well of three wells.

Use:: Not used.

Reference Point: Top of concrete curb on south side of trench with three wells.

Elevation of reference point: 2507.4

	D	n te		Dist. R.P. to water surface			Date	e		Dist. R.P. to water surface
o 1.	_	1070	:	30.0	:	37	e	1071	:	6.9
Sept.			:	10.0				1931		
Oct.	4,	1930	:	7.8	:	Dec.	23,	1931	:	6.5
Dec.	12,	1930	:	6.9	:	Jan.	27,	1932	:	6.3
Feb.	6,	1931	:	6.6	:	Feb.	23,	1932	:	5.4
Mar.	20,	1931	:	6.6	:	Mar.	23,	1932	:	5.6
Apr.	24,	1931	:	7.0	:	Apr.	21,	1932	:	6.0
May	21,	1931	:	7.2	:	May	25,	1932	:	6.5
July	29,	1931	:	9.0	:	July	7,	1932	:	7.2
Sept.	2,	1931	:	7.6	:	Lug.	9,	1932	:	7.8
Oct.	2,	1931	:	7.2	:	Sept.	7,	1932	:	8.0

M-12 A

Location and Description: In southwest corner of $SE_{4}^{\frac{1}{4}}$ of $SE_{4}^{\frac{1}{4}}$, Sec. 24, T.7 N., R.5 W., S.B.B.& M. Middle well of three wells.

Use: Not used.

Reference Point:

Elevation of reference part: 2507.4

	Da	te		Dist. R.P. to water surface			Date	e		Dist. R.P. to water surface
Sept.	4.	1930	:	10.0	:	Nov.	5.	1057	:	6.9
Oct.	•		:	7.7			_ *	1901		6.6
Dec.	12,	1930	:	6.8	:	Jan.	27,	1932	:	6.4
Feb.	6,	1931	:	6.6	:	Feb.	23,	1932	:	5.4
Mar.	20,	1931	:	6.7	:	Mar.	23,	1932	:	5.6
Apr.	24,	1931	:	7.0	:	Apr.	21,	1932	:	6.1
May	21,	1931	:	7.2	:	May	25,	1932	:	6.5
July	29,	1931	:	9.0	:	July	7,	1932	:	7.1
Sept.	2,	1931	:	7.6	:	Aug.	9,	1932	:	7.8
Oct.	2.	1931	:	. 7.2	:	Sept	. 7.	1932	:	8.0

() (10.740)		1-01114-	Sect Tisk
			De Colonia de Care

				Access
1110 000000				
		-	See an an	
			4 1	

120		i=	15

1 -00	

4.5540

Jul		(2)	.2011/12/2015	- L-211100 420
	AUGUST THE REAL PROPERTY.			100 700 000
				Albert Street Committee

	-		

M-12 B

Location and Description: In southwest corner of $SE_{\frac{1}{4}}^{\frac{1}{2}}$ of $SE_{\frac{1}{4}}^{\frac{1}{2}}$, Sec. 24, T.7 N., R.5 W., S.B.B.& M. West well of three wells.

Use: Not used. Reference Point:

Elevation of reference point: 2507.3

	Date		R.P. to : surface :		Date			Dist. R.P. to water surface
		:	:				:	
Sept.	4, 1930	: 9	.7 :	Nov.	5,	1931	:	6.6
oct.	4, 1930	: 7	·.4 :	Dec.	23,	1931	:	6.3
Dec.	12, 1930	: 6	.6	Jan.	27,	1932	:	6.2
eb.	6, 1931	: 6	3.3 :	Feb.	23,	1932	:	5.3
lar.	20, 1931	: 6	.4 :	Mar.	23.	1932	:	5.4
pr.	24, 1931	: 6		pr.				5.8
ay	21, 1931	: 7		May	_			6.3
uly	29, 1931	: 8		July				6.8
Sept.	2, 1931	: 7	.3 :		_	1932		7.5
et.	2, 1931	: 6	.9 :			1932		7.7

M - 13

Rowley

Location are Description: Near southwest corner of NF $\frac{1}{4}$, Sec. 19, T.7 N., R.4 W., G.B.B.& M. 500 feet north of substation on power line and 200 feet east of Highway.

Use: Irrigation.

Reference Point: Top of casing at ground.

Elevation of reference point:

	Date	: Dist. R.P. to : water surface	Dat		: Dist. R.P. to : water surface
		: * 63.9 : * 63.7	May 2		
Sept.	5, 1930	: 69.4 : 69.2	Aug.	-	

^{*} Measurement from W. P. Rowe.

1 11-12

.025		704	001141 Inc
			1-14
	= -14 11 1	7.0	F-1-21
*7	1 100		1

5,000 1 1200

M-14

E. J. Krause

Location and Description: In south est corner of SE_4^1 , Sec. 7, T.7 N., R.4 W., S.B.B.& M.

Reference Point: Top of railroad tie sill at ground level.

Elevation of reference point:

Do	ite		ist, R.P. to ater surface		Date	•	Dist. R.P. to water surface
Winter Mar. 30,	1925 1931	:	* 18. 21.8	:	Aug. 5, 1931 Jan. 13, 1932	:	22 . 8 22 . 0

* Measurement from W. P. Rowe.

M-15

Location and Description: In southeast corner of Sec. 31, T.8 N. R.4 W., S.B.B.& M.

Use: Not used.

Reference Point: Top of concrete curb under two railroad ties which is 10.71 feet above top of 14 inch casing in pit. Elevation of reference point:

	Date			Dist. R.P. to water surface		D	ate			Dist. R.P. to water surface
Sept.	5.	1930	:	16.9	:	Jan.	7.	1932	:	14.8
Dec.		1930				Feb.	,		-	14.4
Mar.	20,	1931	:	14.5	:		23,	1932	:	14.4
May	20,	1931	:	14.8	:	June	23,	1932	:	15.0
Aug.	4,	1931	:	15.9	:	Sept.	7,	1932	:	16.1
Oct.	2,	1931	:	16.0	:	Jan.	10.	1934	:	15.0
Nov.	5,	1931	:	15.4						

M-16

Helendale Store

Location and Description: Near northeast corner of SE¹/₄ of NW¹/₂, Sec. 32, T.8 N., R.4 W., S.B.B.& M.

Use: Domestic.

Reference Point: Top edge of 1" x 4" board around concrete collar and 0.2 feet below top of concrete at ground. Elevation of reference point:

	Date			Dist. R.P. to water surface		D	ate			Dist. R.P. to water surface	-
			:		:				:		
Sept.	5,	1930	:	30.2	:	Jan.	13.	1932	:	25.2	
Mar.	30,	1931	:	29.5		Mar.				25.1	
May	30,	19: 1	:	29.4		June				a 34.5	
Aug.	5,	1931	:	29.7	:		·		:		

a - Pumping.

and the second second at all the little and a set the little and a A 1 1 1 1 1 100 the second secon 1114 1--112 1.11 ---Winds. ----A THE RESERVE TO A PROPERTY OF THE PARTY OF 1917 1

F. H. Merrell

Location and Description: In $\mathbb{NV}^1_{\mathcal{C}}$ of \mathbb{SE}^1_4 , Sec. 31, T.8 N., R.4 W., S.B.B.& M. At edge of trees on road easterly from barn. Head of ditch is west of here and alongside M-17 A. Use: Not used.

Reference Point: Top of 14 inch casing in dug pit approximately 4 feet below average ground.

Elevation of reference point:

	Date		: Dist. R.P. to Date : water surface :								
-	10, 1930		2.2	:	Oct.	2, 1931	:	2.0			
	13, 1930 19, 1931				Nov. Jan.	5, 1931 7, 1932		0.6 0.3			
May Aug.	20, 1931 5, 1931		0.8 2.2			8, 1932 26, 1932		0.0 0.4			

M-17 A

Location and Description: In $NW_4^{\frac{1}{2}}$ of $SE_4^{\frac{1}{4}}$, Sec. 31, T.8 N., R.4 W., S.B.B.& M. 150 feet west of M-17 and 6 feet cast of ditch.

Use: Not used.

Reference Point: Top flange on suction pipe of abandoned pump. Elevation of reference point:

	Date		: Dist. R.P. to : water surface		-	-				Dist. R.P. to water surface
			:		:				:	
Sept.	10,	1930	:	3.3	:	Oct.	2,	1931	:	3.0
ec.	13,	1930	:	1.5	:	Nov.	5,	1931	:	1.6
Mar.	19,	1931	:	1.2	:	Jan.	7,	1932	:	1.2
May	20,	1931	:	1.8	:	Mar.	8,	1932	:	1.1
Aug.			:			May				1.6

		1.1	
	77.		F1 20 20
1- 5		1	

11-3-5			
	1 3 20		4800
		*	

M-18

F. H. Merrell

Location and Description: Near middle of south line of $SE_4^{\frac{1}{4}}$ of $NW_4^{\frac{1}{4}}$, Sec. 31, T.8 . R.4 W., S.B.B.& M. Near Athel tree at house in clearing. Tank near by.

Use: Not used.

Reference Point: Top of 24 inch casing 0.9 feet above ground.

Elevation of reference point:

	Dai	te		ist. R.P. to			Date	9		Dist. R.P. to water surface
Sept.	10.	1930	:	18.4	:	Oct.	2.	1931	:	18.3
Dec.	13,	1930	:		:	Nov.	5,	1931	:	18.0
Mar.			:	17.0		Jan.	-			17.1
•	_	1931	:	17.1		Mar.				17.2 Mud
Aug.	5,	1931	:	18.1	:	May	26,	1932	:	17.0 Mud

M-19

F. H. Merrell

Location and Description: In center and near west line of NW of $NW_{\overline{4}}$, Sec. 31, T.8 N., R.4 W., S.B.B.& M. At ranch house.

Use: Domestic and Irrigation.

Reference Point: Top of 8 inch circular concrete curb 1.0 foot above ground.

Elevation of reference point:

	Date			st. R.P. to		Date	e	Dist. k.P. to water surface		
			:		;				:	
Sept.	10,	1930	:	45.0	:	Jan.	7,	1932	:	44.6
Dec.	13,	1930	:	45.0	:	. 2.	4,	1932	:	44.3
Mar.	19,		:	44.5	:	May	26,	1932	:	44.1
May	20.	1931	:	44.8	:	July	6,	1932	:	44.4
			:	44.9	:	Dec.	8,	1932	:	44.€
Nov.		1931	:	44.9						

A STATE OF THE PERSON NAMED IN COLUMN 2 IS NOT THE OWNER.

2000					
1,0			1,11		
-077	1.4.				
Lan Land		:			
2				272 50	

1-11-2-17-1

4. 10/2 10 1 1000 -1 1 1 1 1

M-20

Location and Description: Near southeast corner of SE_4^1 of SW_4^1 , Sec. 19, T.8 N., R.4 W., S.B.B.& M.

Use: Not used.

Reference Point: Top of 3" x 4" block at base of Bulldozer Pump and resting on one inch board on 4" x 6" timber, 0.7 feet above average ground.

Elevation of reference point:

Da	ate		st. R.P. to ter surface		Da	te			Dist. R.P. to water surface
•	, 1930	:	52.0 52.2 51.9 51.8 51.7	:	Jan. Mar. May July	4, 26,	1932 1932	:	51.9 51.6 51.3 51.2

M-21

Location and Description: In southeast corner of SW_4^1 of SE_4^1 , Sec. 19, T.8 N., F.4 W., S.B.B.& M.

Reference Point: Top of 6.0 foot concrete curb 1.0 foot below average ground.

Elevation of reference point:

Date	: Dist. R.P. to : water surface	•	: Dist. R.P. to : water surface
Sept. 12, 1930 Dec. 13, 1930 Mar. 27, 1931	: 17.3 : 17.2 : 16.5	May 20, 1931 Lug. 5, 1931	

M - 22


Lord

Location and Description: In center and near south line of SW_{4}^{1} of SW_{4}^{1} , Sec. 20, T.8 N., R.4 W., S.B.B.& M.

Use: Domestic and Irrigation.

Reference Point: Top of concrete curb on north side of pit and approximately 9.0 feet below ground.
Elevation of reference point:

	Date		Dist. R.P. to water surface			Date		-	Dist. R.P. to water surface
		:		:				:	
Dec.	13, 1930	:	3.0	:	Jan.	13,	1932	:	2.5
Mar.	26, 1931	:	2.5	:	Mar.	8,	1932	:	2.0
Oct.	2. 1931	•	3.4	:	May	26,	1932	:	2.1
Nov.	5. 1931	·	3.2	:	Jan.	10,	1934	:	2.5

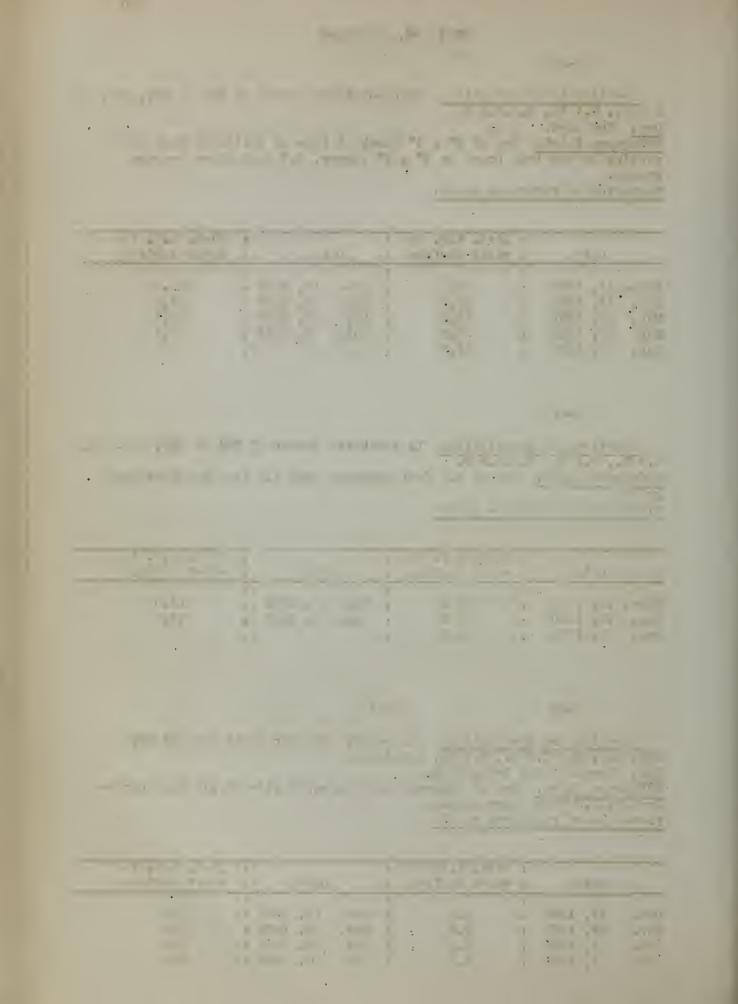

M - 23

Warren Smithson

Location and Description: In southwest corner of SE_{4}^{1} , Sec. 20, T.8 N., R.4 W., S.B.B.& M.
Reference Point: Top of wood cover on pit 2.05 feet below top of concrete block curb.
Elevation of reference point:

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Nov. 5, 1931	: 3,5 : 2.0 : 0.8 : 0.9	: Mar. 8, 1932 : May 26, 1932 : July 6, 1932	: 3.1

M-24

Helendale Orchards

Location and Description: In center and near south line of $SE_{4}^{\frac{1}{2}}$ of $NE_{4}^{\frac{1}{2}}$, Sec. 30, T.8 N., R.4 W., S.B.B.& M.

Use: Irrigation.

Reference Point: Top of concrete pit at floor level of dugout pump station.

Elevation of reference point:

	Da	te		st. R.P. to		Dat	ce		Dist. R.P. to water surface
	3.0	3000	:	3 5	:	27 [1071	:	1.6
Sept.	-		:	1.7		Nov. 5			0.5
Dec. Mar.			:			Mar.			0.0
May			:	0.1		May 26	•		+0.4

100000000000000000000000000000000000000			
	= 7 4		

5-1 5-1 0-1 1-1 1-1		9	

M-25

Jas. Leonard

Location and Description: In southwest corner of SW_4^1 , Sec. 10, T.8 N., R.4 W., S.B.B.% M.

Use: Domestic.

Reference Point: Top of 8" x 8" timber at ground level on east side, 3 feet above concrete curb.

Elevation of reference point:

	Date		ist. R.P. to ater surface	-	Date			Dist. R.P. to water surface
Sept.	10, 1930	:	13.8	:	Nov. 5,	1931	:	15.0
	18, 1930				Jan. 13,			15.0
Mar.	26, 1931	:	12.4	:	Mar. 8,	1932	:	12.5
May	20, 1931	:	11.8	:	May 26,	1932	:	11.4
Aug.	5, 1931	:	13.2	:	Dec. 8,	1932	:	14.2

M-26

Location and Description: Near southwest corner of SE, Sec. 2, T.8 N., R.4 V., S.B.B.& M. North of road and power line. Railroad ties covered with rocks over pit.

Use: Not used:

Reference Point: Top of concrete curb on south side 0.5 feet above ground.

Elevation of reference point:

	Date		Dist. R.P. to water surface	-	ת	ate			Dist. P.P. to water surface
Sept.	16, 1930	:	26.0	:	Jan.	13.	1932	:	24.4
	1, 1931				Mar.	•			23.9
May	20, 1931	:	24.3	:	May	25,	1932	:	24.2
Aug.	5, 1931	:	25.7	:	Jan.	10,	1934	:	25.4

Acceptance in Factor

	T	-			- v	-1-	
	1-			-		-	
					r		
	1	100	100			0.0	
		-			PERM		
581					140		

1

12		1 - 1 - 1	

M - 27

Location and Description: In center and near west line of NW_4^1 of SE_4^1 , Sec. 15, T.8 N., R.4 W., S.B.B.& M. At edge of river wesh, 30 feet north of bank.

Use: Not used.

Reference Point: Top of 6 foot concrete curb on north side and 2.0 feet above average ground.

Elevation of reference point:

	Date		Dist. R.P. to water surface			Da.te	е		Dist. R.P. to water surface
Sept.	19, 1930	:	12.8	:	Nov.	5	1931	:	13.3
-	•		9.2	-	Jan.	,		-	•
Mar.	26, 1931	:	8.0	:	Mar.	8,	1932	:	7.6
May	20, 1931	:	8.9	:	May	26,	1932	:	8.0
Aug.	5, 1931	:	11.8	:	July	6,	1932	:	9.2
Oct.	2, 1931	:	13.1	:	Nov.	15,	1932	:	9.6

M-28

Cornell

Location and Description: Near southeast corner of SW_c^1 of SE_c^1 , Sec. 15, T.8 N., R.4 W., S.B.R.& M. Under two cottonwoods 30 feet north of house.

Use: Domestic.

Reference Point: Three notches on east side of redwood curb 0.3 feet above ground.

Elevation of reference point:

	Dat	е		ist. R.D. to ater surface	•		Date			Dist. R.P. to water surface
May	17.	1922	:	* 11.1	:	Aug.	5,	1931	:	13.9
Sept.	•		:	15.0		Nov.				16.6
Apr.	1,	1931	:	10.2	:	Jan.	13,	1932	:	11.9
May	20,	1931	:	11.0	:	Mar.	17,	1932	:	10.9

^{*} Measurement from W. P. Rowe.

-0-21

M-29

R. Shillinglaw

Location and Description: In center and near west line of $NW_4^{\frac{1}{4}}$ of $NE_4^{\frac{1}{4}}$, Sec. 14, T.8 N., R.4 W., S.B.B.& M. In clump of willows 600 feet north of pumping plant at house.

Use: Not used.

Reference Point: Three notches on south side of 2" x 12" curb at ground level.

Elevation of reference point:

	Da:	te			er surfac		D	ate		•	Pist. P.P. to water surface
		70	:			:				:	_
Jan.					7.8	:	Oct.	7,	1931	:	10.9
Sept.	11,	1930	:	a	10.6	:	Nov.	17,	1931	:	10.8
Apr.	3,	1931	:		7.4	:	Jan.	13,	1932	:	7.8
May	20,	1931	:		7.4	:	Mar.	17,	1932	:	6.1
Aug.	5,	1931	:	a	10.4	:	May	18,	1932	:	7.6

a - Pumping plant 600 feet south operating.

M - 30

J. A. Decrow

Location and Description: In southwest corner of SE2, Sec. 12, T.8 N., R.4 W., S.B.8 M.

Reference Point:

Elevation of reference point:

	D	ate		Dist. R.P. to water surface	-		Date	menter est auto quito servic		Dist. R.P. to water surface
			:		:				:	
Apr.	3,	1931	:	9.0	:	Jan.	13,	1932	:	9.7
May	20,	1931	:	9.5	:	Mar.	17,	1932	:	8.6
Aug.	5,	1931	:	10.5	;	May	18.	1932	:	8.4
_		1931	:	12.0		~		1932		9.9
Nov.			:	10.6	:		,		:	

CONTROL OF THE

	1. 10 10	
-		
	,	

M-31

Conger

Location and Description: In $SE_4^{\frac{1}{4}}$ of $SE_4^{\frac{1}{4}}$, Sec. 23, T.8 N., R.4 W., S.B.B.& M. West of water tank northeast of concrete house. Use: Not used.

Reference Point: Top of iron clamp on railroad tie blocks over casing 0.6 feet above ground.

Elevation of reference point.

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Sept. 12, 1930 Apr. 2, 1931	: : 134.8 : 134.5	: .: June 23, 1932 .:	: 134.7

M - 32

Conrad

Location and Description: Near southwest corner of $NW_{\frac{1}{4}}^{\frac{1}{2}}$ of SW $\frac{1}{2}$, Sec. 24, T.8 N., R.4 W., S.B.B.& M. Near shacks northeast of Conger. Use: Not used.

Reference Point: Top of 8 inch casing 0.2 feet above ground. Elevation of reference point:

Date		Dist. R.P. to water surface	:	D	ate		_	Dist. R.P. to water surface
Sept. 18, 1930	:	136.0	:	/pr.	2,	1931	:	136.0

M-33

Dr. M. H. Kutch

Location and Description: Near center of west line of NW_{4}^{1} , Sec. 31, T.8 N., R.3 W. S.B.B.& M. On east side of road south from Wild 4 miles. Use: Domestic.

Reference Point: Top of 4 inch wood clamp 0.3 feet above ground. Elevation of reference point:

	Date		Dist. R.P. to water surface			Date	9		Dist. R.P. to water surface
Oct.	4, 1930	:	127.7	:	Apr.	9,	1931	:	127.5

-11-17-17

1,275-50-6

- 100

0 0-

M-33 A

Location and Description: Near southwest corner of NW_2^1 of SW_2^1 , Sec.31, T.8 N., R.3 W., S.B.B.& M. 50 feet northeast of M-33 B and three feet southwest of a dry well.

Reference Point: Top of 10 inch battered casing, 0.5 feet above ground. Elevation of reference point:

•	Date		Dist. R.P. to water surface		Date	•	Dist. R.P. to water surface
	4, 1930 9, 1931	:	159.0 158.9	:	Mar. 17, 1932	:	158.8

M-33 B

Location and Description: In $SW_{\tau}^{\frac{1}{2}}$ and 0.3 miles north of the southwest corner of Sec. 31, T.8 N., R.3 W., S.B.8 M. 50 feet southwest of M-33 A.

Reference Point: Top of 10 inch casing, 0.2 feet above ground. Elevation of reference point:

Date		st. R.P. to ter surface		Datc		Dist. R.P. to water surface
 4, 1930 9, 1931	:	159.6 159.3	:	Mar. 17,	1932	159,2

M - 34

Whestphalea

Location and Description: In southeast corner SW_4^1 of SW_4^1 , Sec. 30, T.8 N., R.3 W., S.B.B.& M. In Vista Valley.

Use: Domestic.

Reference Point: Top of 30 inch corrugated iron casing of dug well approximately 1.0 foot above ground.

Elevation of reference point:

Date	: Dist. R : water s			Fist. R.P. to water surface
12, 1930 2, 1931	•	: 05.8 : Jure 05.4 :	23, 1932	205.2

· War and a little	 11=1=		
10-2-20	. 5-7		100

-				_
		to the sales and		
				-
			as the same	100

77.5

1 1	•	1,21	LI FOR
			1000

- 17.000			-		
	A	3 - 7 - 7-1) 	-	
			-	<	
					-

1-1-

1			- 1 - 1	
			 100	
			THE	11000

	4	 ~~~		-
2 1 2				
			, ,	

M - 35

Miller

Location and Description: Near center of east line of S^{n_1} of SE_4 , Sec. 18, T.8 N., R.3 W., S.B.P.& M. In clearing at foot of rock hill. Use: Domestic.

Reference Point: Top of 1 inch wood cover of pit at ground level. Elevation of reference point:

Date	•	Dist. R.P. to water surface		Date		Dist. R.P. to water surface
18, 1930 2, 1931			:	June 23, 1932	:	150.5

M - 36

Arthur Brisbane

Location and Description: Near center of north line of NE of NW, Sec. 18, T.8 N., R.5 W., S.3.B.& M.

Reference Point: Top of wood cover on pit at ground level, 1.0 foot below top of concrete curb.

Elevation of reference point:

	Date		ist. R.P. to ater surface	•	Date	•	t. R.P. to er surface	
*	04 3070	:	F. C. O.	:		**************************************		
Jan.	24, 1930	:	56.8	:		:		

M - 37

Location and Description: Near northwest corner of $SE_2^{\frac{1}{2}}$ of $NE_4^{\frac{1}{2}}$, Sec. 7, T.8 N., R.3 W., S.4.3.& M. Near water tank south of mud and railroad tie shack on bank of river.

Use: Domestic.

Reference Point: Top of 4 foot rock curbed pit at ground level. Elevation of reference Point:

Date		Dist. R.P. to water surface		Date			Dist. R.P. to water surface
11, 1930			-	Nov. 23,	,	-	12.7
 .,	:	11.8	:	Jan. 14, Mar. 17, May 18.	1932	:	11.6 9.8 11.2

TIL

Della de para será

-00

100 m				
			*1	1-0

2 4 1 4		′ -		
	Ł		•	
		12		
	1	1	•	•

		241		
			: !!!!=	
,				
		×		

		•

		*	

Carta Carta		+57	

-			
-			
		•	

M - 38

Everett Swing

Location and Description: In southeast corner of $NW_{4}^{\frac{1}{4}}$ of $SW_{4}^{\frac{1}{4}}$, Sec. 4, T.8 N., P.3 W., S.B.B. & M. North of railroad at gates. Athel and mesquite hedge near by.

Use: Not used.

Reference Point: Top of timber across pit, over 6 inch iron casing in bottom, at ground level.

Flevation of reference point:

Date		Dist. R.P. to water surface			Date		-	Dist. R.P. to water surface
	:		:				:	
Jan. 24, 19	30 :	15.3	:	Nov.	23,	1931	:	15.7
Sept. 11, 19	30 :	15.4	:	Jan.	14,	1932	:	15.1
Apr. 2, 19			:	Mar.	17.	1932	:	13.4
May 21, 19		13.8		May				13.3
Aug. 5, 19				Mar.				13.4

M - 39

Location and Description: In NW_4^1 of NN_6^1 , Sec. 3, T.8 N., R.3 W., S.B.B.& M. Up wash from store at Hodge. Near low dirt bank. Use: Not used.

Peference Point: Top of 1 inch board cover of pit at ground level. Elevation of reference point: 2300.9

Date	: Dist. R.P. to : water surface			Dist. P.P. to water surface
24, 1930 11, 1930		:	May 20, 1931	39.5

March 19 pt 1986

and Pearly 1994

		-	200	
100			-	
127			•	-
				100
102	11 1012 20	1 .	4	

. 100		: 20 m 24

M-40

L. S. Emerson

Location and Description: In $SW_{\overline{q}}^{1}$ of $SW_{\overline{q}}^{1}$, Sec. 34, T.9 N., R.3 W., S.B.B.& M. Pumping plant at south edge of highway. Use: Irrigation.

Reference Point: Three notches in timber at ground level in northwest corner of pit.

Elevation of reference point: 2273.4

	Date		Dist. R.P. to water surface			Date		:	Dist. R.P. to water surface
Jan.	15, 191	; a	* 16.1	:	Doo	2.2	1027	:	זק ז
	14, 192				Dec. Feb.				17.1 12.6
	24, 193		16.5		Feb.	,		-	12.9
Sept.	11, 193	0:	15.5		Mar.				12.0
ec.	12, 193	0 :	16.7	:	Apr.	6,	1932	:	11.9
eb.	13, 193	1 :	14.7	:	May	18,	1932	:	12.0
lar.	17, 193	1:	13.5	:	Sept.	23,	1932	:	14.8
lay	6, 193	1 :	13.9	:	Nov.	15.	1932	:	15.5
lug.	5, 193	1 :	15.6	:	Mar.	2,	1933	:	12.5
ot.	7, 193	1 :	16.9		Dec.	•			16.8
low.	17, 193	1:	17.3	:				:	

^{*} Measurement from W.S.P. 578, page 435, well 79.

M-41

Location and Description: In SE_{4}^{1} of NW_{5}^{1} , Sec. 34, T.9 N., R.3 W., S.B.B.& M. On north side of highway and east of old red iron shed east of Hodge. Sign on shack "Nafick House." West of road to Hinkley. Use: Not used.

Reference Point: Base of pump at top of concrete block at ground level. Elevation of reference point: 2302.1

	Dat	te		st. R.P. to ter surface	•		Dat	е	_	Dist. R.P. to water surface
Jan.	17	1930	:	50.2	:	Δ11σ	5	1931	:	47.5
	•	1930						1931		
Apr.			:	45.5	:	Jan.	7,	1932	:	49.4
Sept.	-		:	47.4	:	Feb.	23,	1932	:	46.1
Mar.	17,	1931	:	46.0	:	Apr.	6,	1932	:	44.9
Мауг	6,	1931	:	45.9	:	May	18,	1932	:	44.6

^{**} Measurement from W. P. Rowe.

177,100		u su su	
		1012	511
	52 21	7- 1	= 100
	1921	100	
		271	. 1111

The state of the s

449

77777	-		1000		10	- Address at a
	:		, 15	1	- 1997	
	11 -7 07		9	×		
	1		10.1		1 (5)	
	18 10 10 10	1710.1			1 112	
100	THE PARTY OF	C SHALL S			(-1.)	2100

M-41 A

Nellie Storey

Location and Description: In $SE_{\frac{1}{4}}$ of $SE_{\frac{1}{4}}$, Sec. 34, T.9 N., R.3 W., S.B.& M. 3/4 mile southeast of M-41. Reference Point: Top of concrete at ground level. Elevation of reference point: 2381.4

Date		R.P. to surface	:		Date	9		R.º. to surface	
19, 1930	-			T ₀	•	1932		126.7	
19, 1931 23, 1932	-	126.5 126.8	: 14	«ar.	22,	1933	:	126.1	

M-41 B

Location and Description: In $\mathbb{N}\mathbb{W}_{4}^{1}$ of $\mathbb{N}\mathbb{W}_{4}^{1}$, Sec. 11, T.8 N., R.3 W., S.B.8. M. $1\frac{1}{4}$ mile south of M-41 A and farther up same draw. Bed rock point ends 50 feet southwest of well.

Reference Point: Top tie on west, 0.35 feet above concrete of shaft at ground.

Elevation of reference point:

Date	: Dist. R.P. to : water surface	·	: Dist. R.P. to : water surface
Sept. 19, 1930 Apr. 19, 1931	: : 124.1 : 124.6	: Apr. 7, 1932 : Mar. 22, 1933	: : 124.4 : 124.4

M-42

Emile Egraud

Location and Description: In NE¹/_c of NE¹/_c, Sec. 27, T.9 N., R.3 W., S.B.B.& M. Bird farm on old Stephens Ranch, 300 feet north of house. Use: Domestic.

Reference Point: Top of concrete pit, 1.0 foot above ground. Elevation of reference pit: 2235.7

	Da:	te		ist. R.P. to ater surface		D	ate			Dist. R.P. to water surface
			:		:				:	
Jan.	24,	1930	:	26.2	:	Oct.	7,	1931	:	26.6
Mar.	17,	1931	:	25.1	:	Jan.	7,	1932	:	28.7
May	20,	1931	:	23.2	:	Mar.	17,	1932	:	a 16.2
Aug.	13,	1931	:	24.6						

a - Pumping 40 feet south.

NAMES AND ADDRESS.

= IV-0.

AND RELIGIOUS AND ADDRESS OF THE PARTY OF TH		markets only it as about 1.
	10-11-11	
17		
	7-2	port of the second of the second

).	1 1 2 2 2 2 2	
		Land to the same a	
		6.00	
Girta			THE AT 123

2350

-	1			*		4
		- 1				
						- 14
			1300	-	-3-7	

	1 2 - 1	TATIO.	T WALLSTON
357	1 FIFT 4363 1		1 -1 -1 110

		-	-0.	٠	23.17
	Vers . 1				19
					111-03

Total I	1813	1000	1	212	- 04

M-42 A

Location and Description: 3/8 mile north of M-42.

Reference Point: Top of curb.

Elevation of reference point: 2232.6

***************************************	Date		st. R.P. to ter surface	-	Date	•	Dist. R.P. to water surface
May	20, 1931	:	23.1	:		:	

M - 43

Sweeten

Location and Description: Near northeast corner of $NW_{\frac{1}{4}}^{\frac{1}{2}}$ of $NE_{\frac{1}{4}}^{\frac{1}{2}}$, Sec.19, T.9 N., R.2 W., S.B.B.& M. Near Southern Sierras Power Co. power line and west of aviation field.

Use: Domestic.

Reference Point: Top of 2" x 12" plank pump base 1.2 feet above ground. Planks rest on concrete foundation 1.0 foot high. Elevation of reference point: 2256.0

	Date	• -	st. R.P. to cer surface	•	D	ate			Dist. R.P. to water surface
Sept.	11, 1930	:	65.8	:	Mar.	17,	1932	:	67.2
May	27, 1931		66.5	:	Sept.	22,	1932	:	66.0
Aug.	19, 1931	:	66.8	:				:	

M - 44

J. E. Sickner

Location and Description: In southwest corner of SW_{4}^{1} of NW_{2}^{1} , Sec. 19, T.9 N., R.2 W., S.B.B.& M.

Reference Point: Top of round concrete cement pit curb at ground level.

Elevation of reference point:

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface.
Jan. 14, 1930	: 1.038	: : Jan. 17, 1930	: Dry :

. . 1 -11 -195 THE RESERVE . 1

M-45

Location and Description: In SW_4^1 of SW_6^1 , Sec. 13, T.9 N., R.3 W., S.B.B.& M. North of house near south edge of railroad. New concrete block house with reservoir and swimming pool.

Use: Irrigation.

Reference Point: Top of concrete pit on south side 1.0 foot above ground level.

Elevation of reference point: 2226.5

	Date		st. R.P. to ter surface	-	D	ate			Dist. R.P. to water surface
Jan.	24, 1930	:	37.2	:	Aug.	19,	1931	:	39.6
May	27, 1931	:	39.3	:	Apr.	6,	1932	:	38.3

M-46

Lenwood Mutual Water Company

Location and Description: In southeast corner of $NE_{\frac{1}{4}}$, Sec. 18, T.9 N., R.2 W., S.B.B.& M.

Use: Irrigation.

Reference Point: $1\frac{1}{2}$ inch pipe under pump 1.4 feet above floor level. Elevation of reference point: 2248.3

	Date		Dist. R.P. to water surface	-]	Date			Dist. R.P. to water surface
Jan.	17, 1930	:	64.0	:	Mar.	23	1032	:	67.2
	11, 1930		66.5		Mar. May				66.7
•	27, 1931		67.8	:	Sept.	22,	1932	:	65.8
Nov.	23, 1931	:	67.9	:				:	

M-47

Location and Description: In $SW_{\frac{1}{4}}$ of $SW_{\frac{1}{4}}$, Sec. 8, T.9 N., R.2 W., S.B.E.& M. Northeast of Lenwood near rock ridge. Peference Poirt: Top of 12" x 12" across pit at ground level. Elevation of reference point:

	Date		ist. R.P. to ater surface		·	Dist. R.P. to water surface
Jan. Jan.	14, 1923 17, 1930	•	* 45.0 Dry	:	Sept. 11, 1930	Dry

^{*} Measurement from W. P. Rowe.

 	Column

5.00	1.00	.=.

500	255	1213	•

and the state of		
	11111 3 30	

		 			=
 					-
1		 400	٠.	407	100
	•				

M-47 A

Location and Description: In $NE_4^{\frac{1}{4}}$ of $NE_4^{\frac{1}{4}}$, Sec. 18, T.9 N., R.2 W., S.B.B.& M. 300 feet north of railroad crossing at Lenwood.

Use: Not used.

Reference Point: Ground level. Elevation of reference point:

	Date	_	Dist. R.P. to water surface	:		 P.P. to surface
Sept.	11, 1930	:	49. Dry	:	:	

M-48

Location and Description: In $SE_4^{\frac{1}{2}}$ of $SE_4^{\frac{1}{2}}$, Sec. 6, T.9 N., R.2 W., S.B.B.& M. Well is north of west end of rock hog back.

Use: Not used.

Reference Point: Top railroad tie at ground level on east side of 7' x 7' wood pit with well in bottom. Elevation of reference point: 2183.8

Date	: Dist. R.P. to : water surface	•	: Dist. R.P. to : water surface
Sept. 11, 1930 Aug. 19, 1931	: : 17.7 : 19.1	: Nov. 23, 1931 : Mar. 17, 1932	

M-49

Fogelsang

Location and Description: In northwest corner of SE_4^1 of SW_4^1 , Sec. 1., T.9 N., R.2 W., S.B.B.2 M. Well is east of well at group of cabirs on south side of highway west of Barstow Hill.

Reference Point: Elevation of reference point:

Date	• • • • • • • • • • • • • • • • • • • •	ist. R.P. to ater surface	:		Date	****		Dist. R.P. to water surface
Jan. 14, 1923	:	* 59.5	:	Jan.	17,	1930	:	60.3

^{*} Measurement from W. P. Rowe.

341.

1-1-21-6-6

1 Th-1

A STATE OF THE PARTY OF THE PAR	THE STATE STATE

1000000		 	· · · ·
		1-41 .0	

	1 - 11	Lining	
		-dile si	

	_	***		~	* 25 000	61 TV 676 1	10 p
			1		- ,		
				-,72			111
100	. 1	17		6,41	٠.	()	100

are las

· - 500 ()	0 - W	

	-			1 6		
					-	
1400		 :	,	:	1.11	

M-50

Location and Description: In SW_{1}^{1} of SW_{4}^{1} , Sec. 27, T.9 N., R.3 W., S.R.B.& M. On west fence line and north of road (Hodge to Hinkley). On ranch nearest gauging station.

Use: Irrigation.

Reference Point: Top of concrete block pit on south side at ladder; 1.0 foot above average ground.

Elevation of reference point:

	Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Mar.	24, 1930 17, 1931 20, 1931	: 18.4 : 14.8 : 17.7	: Aug. 13, 1931 : Feb. 4, 1932 : Feb. 23, 1932	: 16.2

M-51

J. Slagill

Location and Description: In NE_4^2 of NE_4^2 , Sec. 28, T.9 N., R.3 W. S.B. 3.& M. At edge of river.

Use: Domestic

Reference Point: Top of 1 inch cover of pit at ground level. Casing in bottom of pit.

Elevation of reference point:

Date	: Dist. R.P. to : water surface		Dist. R.P. to water surface
	17.0 : 6.7 : 4.6 : 20.2 : 22.2 : 22.5	Jan. 7, 1932: Feb. 4, 1932: Mar. 4, 1932: Jan. 10, 1933: Feb. 9, 1934:	14.5 3.4 11.4

Commission of the contract of

				-
- 2000		alitis resp.	_ 1200 11	1100
5-0	•	-0.00	9-11	1007 , 12
Auto a	: 111 1.		Tell (
6.77	2 1100 0	47	1.11	

\$10 - 10 a 60

THE RESERVE THE PARTY OF THE PARTY OF THE PARTY OF THE PARTY.

Transport of	1	
9.2	i hai ir com i	1111111 -57
Set	1 150 1	

M-52

Location and Description: In $SE_4^{\frac{1}{4}}$ of $SW_4^{\frac{1}{4}}$, Sec. 10, T.9 N., R.3 W., S.B.B.& M. On hill.

Use: Not used.

Reference Point: Small hole punched in west side of casing, 0.5 feet above ground.

Elevation of reference point: 2292.2

	Date		ist. R.P. to ater surface			Date			R.P. to surface	
Feb.	4, 1930 25, 1931 6, 1931 10, 1932	:	90.8 91.4 91.4 91.7	:	Mar. July Dec. Feb.	26, 22,	1932 1932	:	91.7 91.7 91.5 91.1	

M-52 A

Location and Description: In $SW_{\frac{1}{4}}$ of $SW_{\frac{1}{4}}$, Sec. 32, T.10 N., R.3 W., S.B.& M. Two miles north and two miles west of M-52. Reference Point: Top of bearing 2.8 feet above ground. Elevation of reference point: 2259.4

	Date	: Dist. R.P. to : water surface	-	Date		Dist. R.P. to water surface
Feb.	25, 1931	: 83.8	:	Mar. 10, 1932	:	84.2
Aug.	11, 1931	: 84.0	:		:	

M-52 B

Location and Description: Near center of north line of NW_2^1 , Sec. 32, T.10 N., R.3 W., S.B.B.& M. Reference Point: Top of 2" x 12" curb at ground leve. Elevation of reference point: 2219.2

	Date	•	ist. R.P. to ater surface			Date)	-	Dist. R.P. to water surface
	25, 1931	:	54.7		July	-			55.2
_	11, 1931 10, 1032	:	54.8 55.1		Dec. Feb.	-			55 .4 55 .7
Mar.	29, 1932	:	55.1	:				:	

And the state of t

In the same to the same of the

tile out on the Parket

7 4 1	entern B	or dal als	milita ndi			
1(1)/40, 40, -	1			:		in planta r
1,20			100			1000
722			40			
6.70			1.0		1775.3 ,79	*EW/
•				٠		1

4 30-1

-	Mary .		00074	e Till to the time	 -dia	
160			7.	18		
			¢ and	17 17		•

1 7000

77				Cr. Chang
		- 1500.0	de la	
				E194 .08
Parti	1		-6	- 11 VIII 13E
7,000		2,11		ı. ı
				1 15 170

M-52 C

Location and Description: Near center of west line of SW4, Sec. 29, T.10 N., R.3 W., S.B.B.& M.

Reference Point: Top of 7 inch casing, 0.3 feet above concrete.

Elevation of reference point: 2209.7

Date		Dist. R.P. to water surface		Dε	te				R.P. to surface	
Feb. 25, 1931	:	51.2	:	Mar. 1	.0,	1932	:	a	51.7	

a - Pumping slowly.

M-52 D

Location and Description: Near center of north line of Sec. 28, T.10 N., R.3 W., S.B.B & M.

Reference Point: Top of 1 inch plank cover 0.1 foot above ground.

Elevation of reference point: 2161.1

	Date		ist. R.P. to ater surface	:	Date	•	Dist. R.P. to water surface
Feb.	25, 1931	:	15.7	:		:	

M-52 E

Location and Description: In SE_{4}^{1} , Sec. 8, T.9 N., R.3 W., S.B.B.& M. Reference Point: Top of 1.2 inch casing 2.0 feet above ground. Elevation of reference point:

Date	: Dist. R.P. to : water surface	•	Dist. R.P. to water surface
25, 1931 11, 1931	: 118.9 : 119.2	: Mar. 10, 1932 :	119.4

4.00

The 1 (100 to 100 to 10

.

9.44

11-53

Location and Description: In northeast corner of Sec. 10, T.9 N., R.3 W., S.B.B.& M. On edge of slope to river.
Use: Not used.

Reference Point: Top of 6 inch casing at ground level, 3 ties bolted together at southeast corner of house.

Elevation of reference point: 2256.0

	Da	te		st. R.P. to ter surface]	Date			Dist. R.P. to water surface
Dec.	19,		:	77.9 79.0 79.3	:	Mar.	29,	1932 1932 1932	:	80.8 80.4 78.4
Aug.	6,	1931	:	79.9	:	Dec.	22,	1932	:	77.3

:

80.8

M-53 A

1932

Feb.

4,

Location and Description: In northwest corner of $SW_{a}^{\frac{1}{2}}$, Sec. 11, T.9 N., R.3 W., S.B.B.& M. At foot of hill.

Use: Not used.

Reference Point: Top of 1" x 12" board on north upright 1.0 foot above wood cover and 2.0 feet above ground.
Elevation of reference point:

	Date		Dist. R.P. to water surface		D	ate		_	Dist. R.P. to water surface
Dec. Mar. Feb.	19, 1930 17, 1931 4, 1932 4, 1932	:	26.9 28.2	:	Mar. July Dec.	26,	1932	:	24.8 21.5 22.0

Section of the latter

No.

	X -10	of the same

0.73-5

			5 545	Zhu	T
:	:	•			11 100

M - 54

Location and Description: Near center of $NE_{\frac{1}{4}}$ of $SE_{\frac{1}{4}}$, Sec. 3, T.9 N., R.3 W., S.B.B.& M. On east side of road.

Use: Not used.

Reference Point: Top of 12 inch casing 2.4 feet above ground.

Elevation of reference point: 2242.9

	Date		ist. R.P. to		Date		Dist. R.P. to water surface
Dec. Mar.	19, 1930	:	66.8 67.3 67.5 67.9	:	Mar. 4, 1932 Mar. 29, 1932 July 26, 1932	:	68.9 68.7 67.6

M-54 A

Location and Description: In southwest corner of $NW_{4}^{\frac{1}{4}}$ of $SW_{4}^{\frac{1}{4}}$, Sec. 35, T.10 N., R.3 W., 3/4 mile south of M-70 A. Reference Point: Top of wood curb on north side at ground. Elevation of reference point: 2212.0

	Date			Dist. R.P. to water surface			Date			Dist. R.P. to water surface
Sept.	19,	1930	:	52.0	:	Mar.	29,	1932	:	53.4
Dec.	19,	1930	:	51.1	:	Apr.	21,	1932	:	54.1
Aug.	6,	1931	:	54.0	:	July	26,	1932	:	55.4
Mar.	4,	1932	:	52.8	:	Dec.	22,	1932	:	54.4

M - 55

Location and Description: In southwest corner of Sec. 27, T.10 N., R.3 W., S.B.& M. On north side of Highway. Service station on corner. Use: Irrigation and domestic.

Reference Point: Top of 2" x 12" boards across pit, 1.1 feet below door sill which is 0.6 feet above ground.

Elevation of reference point: 2196.0

	Date		st. R.P. to		D	ate		-	Dist. R.P. to water surface
Mar.	4, 1930 17, 1931 11, 1931	:	40.1 41.8 42.6	:	Nov. Mar. Mar.	16,	1932	:	43.2 43.4 43.1

100					
		0			
				.0	7

0.000

-12111			
	,	• •	
	y	. 14	
		1	2 - 1 1-1 1-
	THE ME THE	1	1 LJ. 190
•	THE RESERVE	1	1 .

1000		1	
*			
			1 011.3 200
100	1 100 2 200 -100	2	the state of the state of
1,271			

M - 56

Osborn

Location and Description: In southeast corner of Sec. 10, T.9 N., R.3 W., S.B.B.& M.
Use: Not used.

Reference Point: Top of 2 inch wood curb on east side at ground level. Elevation of reference point: 2209.2

	Date		Dist. R.P. to water surface			Date			Dist. R.P. to water surface
Sept.	11, 1930	:	20.5	:	Feb.	4,	1932	:	22.8
Dec.	19, 1930	:	21.0	:	Mar.	4,	1932	:	18.4
Mar.	17, 1931	:	21.6	:	Mar.	29,	1932	:	17.8
Aug.	5, 1931	:	22.2	:	July	26,	1932	:	13.1

M-56 A

Bullock

Location and Description: In southwest corner of NW_4^1 of NW_4^2 , Sec.14, T.9 N., R.3 W., S.B.B.& M. At pumping plant on east side of road. Reference Point: Top of 2 inch well cover at ground. Elevation of reference point:

	Date		st. R.P. to ter surface			Dato		Dist. R.P. to water surface
Dec.	19, 1930	:	23.8	:	Mar.	29, 1932	;	16.0
	17, 1931	:	24.4	:	July	26, 1932	:	13.0
Aug. Feb.	5, 1931 4, 1932		24.9 25.0			5, 1932 22, 1932		14.2 16.0
Mar.	4, 1932		17.3			10, 1934		19.7

M - 57

Location and Description: Near northwest corner of $NW_{4}^{\frac{1}{4}}$ of $SW_{2}^{\frac{1}{4}}$, Sec. 14, T.9 N., R.3 W., S.B.B.& M. Tall corrugated iron tank at well. Use: Not used.

Reference Point: Top of concrete block pit on south side at ground level. Elevation of reference point:

	Date		Dist. R.P. to water surface			Date			Dist. P.P. to water surface
		:		:				:	
Sept.	11, 1930	:	21.5	:	Feb.	4,	1932	:	24.0
Dec.	19, 1930	:	23.1	:	Mar.	4,	1932	:	11.6
Mar.	17, 1931	:	23.8	:	Mar.	29,	1932	:	9.6
Aug.	5, 1931	:	24.4	:	July	26,	1932	:	12.0

	1.000	
		1 7 10 -10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1

period \$ 1000

		- 1		-		
						1
Lat			999			
740	-100	1 1	500		i , i	12

. . .

17714 100	1 4 400 1		Property and the second			
		-	matter a	- >		
			4.70			
19600		-3-1			•	0.0
			9,07	-	-3.40	13.7

M-57 A

Location and Description: In northeast corner of $SE_4^{\frac{1}{4}}$ of $SE_4^{\frac{1}{4}}$, Sec. 15, T.9 N., R.3 W., S.B.8 M. On west side of road at edge of river. Reference Point: Top of 12 inch casing near 30 inch casing, 3.0 feet below ground.

Elevation of reference point: 2217.9

	Date		ist. R.P. to ater surface		Date		: Dist. R.P. to : water surface
Dec.	19, 193	: 30 :	17.9	:	Mar. 4.	1932	3.8
	17, 193		18.5		Mar. 29,		
Aug.	5, 193	31 :	19.1	:	July 26,	1932	: 6.2
Feb.	4, 193	32 :	18.4	:			:

M-58

George Tyler

Location and Description: In southwest corner of SW_{4}^{1} , Sec. 33, T.11 N., R.3 W., S.B.B.& M.

Use: Irrigation.

Reference Point: Top of 30 inch concrete pipe casing northeast of house, 0.3 feet above ground.

Elevation of reference point: 2067.3

D	ate	: water	surface	:	D	ate			Dist. R.P. to water surface
May 31	•	:	10.1		Mar.				10.3
Feb. 25 Apr. 27	•	•	10.2 10.4	:	Dec.	22,	1932	:	Plugged

M-59

Location and Description: Near center of north line of SW_{4}^{1} of SW_{4}^{1} , Sec. 5, T.10 N., R.3 W., S.B.B.& M. Flowing well between two roads on south side of Harper Lake just west of square concrete trough. Feference Point:

Elevation of reference point:

	Date		Dist. R.P. to water surface	_	I	Onte			Dist. R.P. to water surface
47	31, 1930 10, 1932	:	Flowing Flowing	:	Мау	4,	1932	:	Flowing

100				=	
	7		1		13

and the				
		· [- (2)	100

1 - 1 y 1 - 1 - 1 - 1

	2.0	
	•	
7 1	-4	011

M-60

Location and Description: Near center of north line of NW of NE of

Reference Point:

Elevation of Reference point:

	Date		Dist. R.P. to water surface	:	Date		Dist. R.P. to we ter surface
May	31, 1930	:	Flowing	:	May 4, 1932	:	Flowing
Mar.	10, 1932	:	Flowing	:		: .	

M-61

Location and Description: Near northwest corner of $NE_4^{\frac{1}{4}}$ of $SE_4^{\frac{1}{4}}$, Sec. 30, T.11 N., R.3 W., S.B.B.& M. Flowing well on Blacks Ranch.

Reference Point:

Elevation of reference point:

	Date		st. R.P. to ser surface	Date	•	Dist. R.P. to water surface
Nov. May Aug.	1919 1922 27, 1931	: *	Flowing Flowing Flowing	Mar. 10, 19 Dec. 22, 19		9

^{*} Measurement from W. P. Rowe.

M-62

Location and Description: In northwest corner of NE_4^1 of SE_4^1 , Sec. 30, T.11 N., R.3 W., S.B.B.& M. Small well in yard near cook shack. Reference Point: Top of 5 inch galvanized iron casing 1.6 feet above ground.

Elevation of reference point:

	Date		Dist. R.P. to water surface			Date	 -	Dist. R.P. to water surface
•	31, 1	:	3.5	-	Mar.	•		4.0
	25, 1 27, 1	:	3.3 5.8		Dec. Feb.			4.7 4.6

- 1 - 2 100

·)=1-----

M - 64

Location and Description: In northeast corner of SE_{ζ}^{1} , Sec. 28, T.11 N., R.3 W., S.B.B.& M.

Reference Point: Top of 12 inch casing with 6 inch inside string 1.2 feet above ground.

Elevation of reference point: 2080.6

Date	: Dist.:R.P. to : water surface		: Dist. R.P. to : water surface
Mar. 10, 1932	42.8 42.9 43.0 43.0	: July 6, 1932 : Dec. 22, 1932 : Feb. 9, 1934	: 43.2

M-64 A

Location and Description: Near the northeast corner of $SE_{\frac{1}{2}}$, Sec. 28, T.11 N., R.3 W., S.B.B.& M. 175 feet west of M-64. Use: Not used.

Reference Point: Top of 6 inch casing 1.3 feet above ground. Elevation of reference point: 2079.1

	Date		Dist. P.P. to water surface	-		Date		-	Dist. R.P. to water surface
Feb.	31, 1930 25, 1931 10, 1932	: :	41.4	:	Mor. July Feb.	6,	1932	:	41.6 41.6 42. Dry

M-65

S. F. Edwards

Location and Description: 600 feet north of southeast corner of Sec. 28, T.11 N., I.3 W., S.P.3.& M. On west side of road in cottonwoods. Galvanized iron trough and dirt reservoir.

Reference Point: Top of 2" x 10" board cover of pit at ground level. Elevation of reference point: 2073.5

1	Date		Dist. R.P. to water surface			Date		-	Dist. R.P. to water surface
Feb.	31, 1930 25, 1931 27, 1931	:	21.4	:	Mar. July Dec.	6,	1932	:	22.2 22.1 22.9

	 7 7 7	

		1707	
6	100	555	E # 10
7	***	33	

.11-8.0								
•	-				4.4	м		7/41
				111	27			-
				-			-	-

		9		1115	
1 1-1-7	_10	٠	1.11	•	. 1

7711.37			1.1.	-	_
	1=3	1 :5	120		

M-66

Location and Description: Near center of south line of $SE_2^{\frac{1}{2}}$ of $NW_4^{\frac{1}{2}}$, Sec. 34, T.11 N., R.3 W., S.B.B.& M. 0.6 mile north of south line of Sec. 34 in galvanized pump house with cottonwoods 300 feet east of read. Use: Not used.

Reference Point: Top of 12" x 12" timber across pit, 1.5 feet above curb top at ground level.

Elevation of reference point: 2086.9

	Da	te		Dist. R.P. to water surface	D	ate		Dist. P.P. to water surface
May			:	_	Mar.			29.9
Feb. Aug. Mar.	27,	1931	:	29.7	Dec. Feb.			30.0 30.2

M-67

Location and Description: Near southeast corner of NE., Sec. 4, T.10 N., R.3 W., S.B.B.& M. At northeast corner of abandoned reservoir. Use: Not used. Reference Point: Top of battered 12 inch casing 0.2 feet above ground.

Elevation of reference point: 2099.2

Dει	te		R.P. to surface		Date		Dist. R.P. to water surface
•		:	34.6 35.1	Feb.	-		35.4 32. clogged

^{*} Measurement from W.S.P.578, page 272, well 36.

James - Strategy

 	46.45

a malalil					
- 10 10 10			1		
				925	
100	-01			707	1 10-2
		. 1		9975	
					I the her when

	Billion Street

11 4 4 4 1		3 - [+]	0		
- 1 - 1 10					
			13		
			- 6		

M-68

Location and Description: In southeast corner of $SW_{4}^{\frac{1}{4}}$ of $SW_{4}^{\frac{1}{4}}$, Sec. 11, T.10 N., R.3 W., S.B.B.& M. Northeast of old shack. Use. Not used.

Reference Point: Top of 2" x 12" curb of octagon pit 0.2 feet above ground level on east.

Elevation of reference point: 2142.1

	Dat	te		Dist. R.P. to water surface		Da	te			Dist. R.P. to water surface
D/	77	3.070	:	25.0	:	70	20	1079	:	70 7
		1930				Mar.	•			32.3
	-	1931	:			July				32.4
May	27,	1931	:	31.9	:	Dec.	22,	1932	:	32.8
Aug.	11,	1931	:	32.0	:	Feb.	9,	1934	:	Caved in
Mar.	10,	1932	:	32,2	:				:	

M-69

R. B. Riley

Location and Description: Near northeast corner of SW_2^1 of W_2^1 , Sec. 24, $\overline{\text{T.10 N.}}$, R.3 W., S.B.B.& M. 1000 feet north of house at reservoir. Use: Irrigation. Reference Point: Top of pump base on casing 1.0 foot above ground in pump house.

Elevation of reference point: 2165.1

	Date	•	Dist. R.P. to water surface		D	nte		Dist. R.P. to water surface
U	31, 1930 27, 1931	:	a 51.0 33.2	-	Mar. July	,		33.2 34.6

a - Pumping.

THE STREET

*		,	•		
				1	

12 1- --

M-70

Location and Description: In southwest corner of SE_4^1 of SE_4^2 , Sec. 26, T.10 N., R.3 W., S.B.B.& M. Weir box on north side of highway. Reference Point: Top of wood curb on north side at ground level. Elevation of reference point: 2183.0

	: Dist. R.P. to Date : water surface					D	nite				R.P. to r surface
			:		:				:		
Apr.	4,	1930	:	28.2	:	Mar.	29,	1932	:		31.7
Doc.	19.	1930			:	Apr.	21,	1932	:		32.0
Mar.	19.	1931	:	29.7	:	May	10,	1932	:		32 .2
Aug.	6,	1931	:	30.0	:	July	6,	1932	:	a	32.9
Nov.			:	32.1		Jan.					33.8
			:			Jan.					33.6

a - Pumping nearby.

M-70 A

L. A. Finney

Location and Description: In southwest corner of Sec. 26, T.10 N., R.3 W., S.B.B.& M.

Use: Domestic windmill.

Reference Point: Top of 0.2 foot clamp on casing 1.5 feet above ground. Elevation of reference point: 2185.5

	Date			R.P. to			ate				R.P. to
		:			:				:		
Apr.	4, 1930	:	a	36.3	:	Nov.	17,	1931	:		33.9
Dec.	19, 1930	:	а	33.8	:	Mar.	4,	1932	:		33.6
Mar.	19, 1931	:		34.4	:	Mar.	29,	1932	:	a b	36.0
Aug.	6, 1931	:	a	37.4	:	Apr.	21,	1932	:		36.2

a - Pumping 200 feet south.

b - Windmill pumping.

				14
			- 1	
	•		e q	

	1-0

The state of the s

M-70 B

Location and Description: In NW2 of SW4, Sec. 26, T.10 N., R.3 W., S.R.B.& M. Old pumping plant north of residence.

Reference Point: Top of pump base at ground.

Elevation of reference point: 2177.2

	Date		st. R.P. to ter surface	•		Date		Dist. P.P. to water surface
		:	24.8 25.5		Mar.	-		25.1 27.8
Aug.	6, 1931	:	28.4 26.2		Mar. Apr.	,		27.6

25-71

A. H. Harris

Location and Description: Mear southwest corner of Sec. 23, T.10 N., R.3 V., S.B.P.1 North of rock hill and east of road.

Reference Point: Top of railroad tie at ground level on east side of curb. Elevation of reference point:

Date	: Dist. R.P. to : water surface	•	: Dist. F.P. to : water surface
Dec. 19, 1930 June 4, 1931	26.9 26.9 27.4 28.0	: Mar. 10, 1932 : Mar. 29, 1932 : Dec. 22, 1932	: 28.2

M-72

G. Podgett

Location and Description: Near northeast corner of SW1, Sec. 6, T.9 N., R.2 N., S.B.B.& M. At northeast corner of dirt reservoir. Reference Point: Top of 2" x 6" plank cover across pit 0.5 feet above ground.

Elevation of reference point: 2184.5

	Date	ist. R.P. to ater surface	•	De	te		Dist. F.P. to water surface
	17, 1930	15.5		l'ov.			18.6
Doc. Aug.	19, 1930 12, 1931	17.0 18.2		Mar. May	-		11.7 10.6



M-72 A

De Wolf

Location and Description: One-half mile south of Rucker pumping plant near river at north and of trees and in northwest corner of hay field and at southeast corner of reservoir.

Reference Point: Top of 12 inch casing in tie lagged pit to and including Mar. 20, 1929; then top of 2 inch cover on pit 12.56 feet alove 12 inch casing in pit.

Elevation of reference point:

	Pate	ist. R.P. to ater surface	D	nte	•	Dist. R.P. to water surface
~	25, 1925 20, 1929	* 5.5 * 7.6	Dec.	,		18.4 13.2
	surement fi	. P. Rowe.		,	i	

M - 73

Location and Description: In southeast corner of SW_4^1 of SW_4^1 , Sec. 31, T.10 N., R.2 W., S.R.B.& M.

Use: Irrigation.

Feference Point: Top of casing under pump at fir line 0.8 feet above ground. Elevation of reference point: 2183.8

Nate	: Dist. R.D. to : water surface	•	• •
 19, 1930 19, 1930	•	: Aug. 13, 1931 : 21. : Mar. 16, 1932 : 17.	_

11-74

J. D. Rich

Location and Description: In southeast corner of SW_2^1 of SW_2^1 , Sec. 30, T.10 F., R.2 W., S.3.B.& M.

Usc: Domestic

Reference Point: Top of wood clamp 0.47 feet above top of cement pipe casing which is 1.5 feet above ground.
Elevation of reference point: 2179.0

	Date	: Dist. R.P. to : water surface				Data			Dist. E.P. to water surface		
		:		:				:			
Apr.	4, 1930	:	20.1	:	Mar.	29,	1932	:	a 21.9		
Dec.	19, 1930	:	20.8	:	Apr.	21,	1932	:	€. 22.4		
Mar.	27, 1931	:	21.6	:	May	12,	1932	:	a 21.8		
Aug.	13, 1931	:	22.3	:	July	6,	1932	:	b 25.1		
Nov.	17, 1931	:	22.4	:	Jan.	11,	1933	:	20.6		
Mar.	4, 1932	:	21.4	:	Jan.	10,	1934	:	20.9		

a - Pumping nearby

b - Windmill pumping slowly

471.6 E-27-000 . . . ` . 14 37 5 .

M - 75

Mrs. Loftus

Location and Description. In northeast corner of SE_{i}^{1} of SW_{i}^{1} , Sec. 19, T.10 N., R.2 W., S.B.P.& M. New well on side hill north of school.

Use: Domestic.

Reference Point: Top of wood clamp 0.62' x 0.62' on casing which is at ground level.

Elevation of reference point: 2217.0

	Da te	: Dist. R.P. to : water surface		ist. R.P. to
-	,	: 63.2 : 63.6	: Mar. 10, 1932 : July 6, 1932 :	64.5 e 67.1
		: 63.9 : 64.2	Jrn. 11, 1933 :	64.9

a - Windmill pumping.

M - 76

School House

Location and Description: In southeast corner of Sec. 30, T.10 N., R. 2 W., S.B.B.& M.

Use: Domestic

Reference Point: Top of 4" x 4" wood clamp which is 0.33 feet above casing top and 2.33 feet above concrete slab.

Elevation of reference point: 2177.5

	Dete		R.P. to surface			Date		Dist. R.P. to water surface	
		:		:				:	
Apr.	4, 1930	:	18.0	:	Mar.	10,	1932	;	20.3
Dec.	19, 1930	:	19.0	:	Lpr.	21,	1932	:	20.0
May	21, 1931	:	19.4	:	May	12,	1932	:	19.8
Aug.	13, 1931	:	19.8	:	July	6,	1932	:	18.9
Nov.	17, 1931	:	20.2	:				:	

M-77

Location and Description: Near certer of north line of $NV_4^{\frac{1}{2}}$ of $NE_4^{\frac{1}{2}}$, Sec. 32, T.10 N., R.2 W., S.B.B.& M. Pit in old lake bed on south side of highway. Casing in bottom.

Reference Point: Top of wood curb on north side at ground level.

Elevation of reference point: 2171.1

	Da.te	•	ist. F.P. to		T)	e to			Dist. R.P. to water surface
Sept.	4, 1930 19, 1930 19, 1930	:	13.0 13.6 14.0	:	Ney Aug. July	13,	1931	:	16.5 16.7 14.8

Opt 1 1 to the second of the latest THE LO --10 .

M - 78

S. S. Hill

Location and Description: Near center of west line of NWL of NWL, Sec. 4, T.9 N., R.2 V., S.B.B. M.

Use: Irrigation.

Reference Point: Top of circular concrete pit.

Elevation of reference point:

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
Sept. 26, 1925 Dec. 18, 1928		: Mar. 16, 1932	: : a 16.5
* Measurement f	rom W. P. Rowe.		

a - Pumping.

M - 79

A. L. Sloan

Location and Description: In northwest cerner of Sec. 3, T.9 N., R.2 W., S.3.P.& M.

Use: Irrigation.

Reference Point: Underside of 2 inch timber under concrete sill on south wall 9.32 feet above top of casing.

Elevation of reference point: 2150.1

	Date		st. R.P. to ater surface	-		Date			Dist. F.P. to water surface
Dec.	4, 1930 19, 1930 20, 1931	: : :	12.7 13.5 13.7	:	Nov. Mar. May	16,	1932	:	14.2 11.4 11.0


N.-80

Location and Description: Near center of SW_4^2 of SE_4^1 , Sec. 35, T.10 N., R.2 W., S.B.B.& M. South of highway and north of railroad at tall vitrified tight staved pipe.

Use: Not used.

Reference Point: Top of 8" x 8" timber on east side of pit. Elevation of reference point:

	Date	• –	ist. R.P. to ater surface	•		Date		Dist. R.P. to water surface	
Apr. Dec. May Aug. Nov.	4, 1930 19, 1930 21, 1931 12, 1931 24, 1931	:	8.8 9.7 9.5 10.3 10.8	:	Mar. Mar. May Jan.	29, 12,	1932 1932	:	8.1 8.0 8.1 9.2

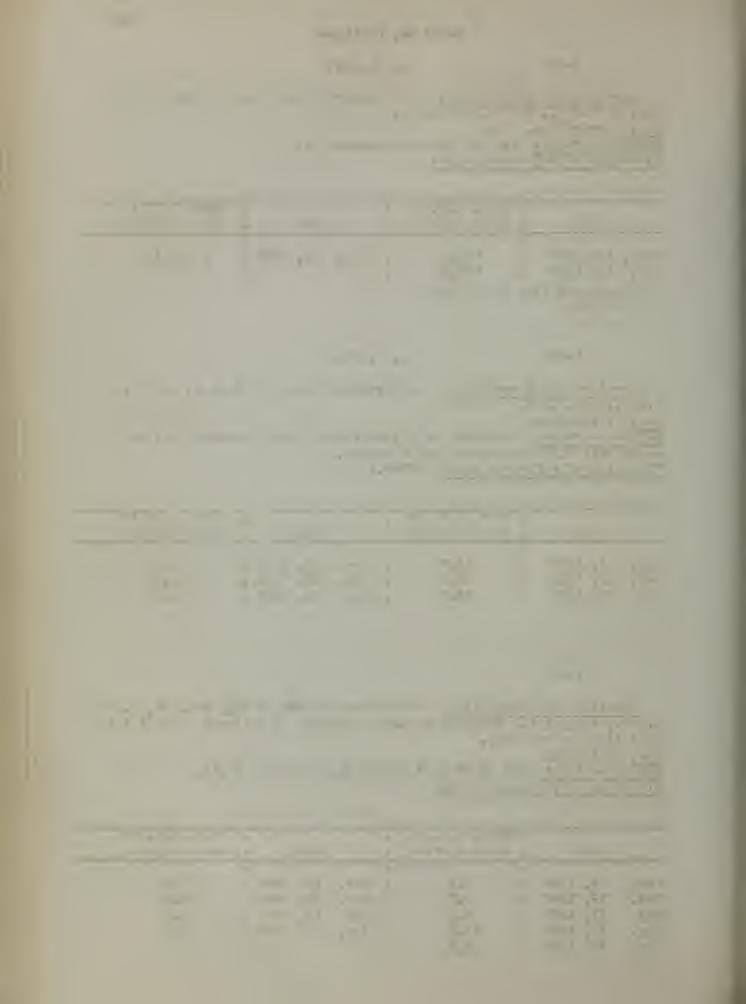

M-81

Location and Description: Near northeast corner of SE_4^1 of $S^{**}l_4^1$, Sec. 36, T.10 N., R.2 W., S.3.B.* M.

Use: Domestic.

Reference Point: Top of 2" x 4" door sill 0.5 feet above average ground. Elevation of reference point: 2110.6

Date	: Dist. R.P. to : water surface		Dist. R.P. to water surface
Apr. 4, 1930 Dec. 19, 1930 May 21, 1931 Aug. 15, 1931	9.1 9.7	: Oct. 7, 1931 : Nov. 24, 1931 : Mar. 16, 1932 : May 13, 1932 :	9.9 a 7. 6

a - Windmill pumping.

M-82

Water Co. in Barstow

Location and Description: Near center of west line of \mathbb{NV}_{2}^{1} of \mathbb{NE}_{4}^{1} , Sec. 6, T.9 N., R.1 W., S.B.B.& M. At old ice plant between tracks. Southwest of Standard Oil Co. station.

Uso: Not used.

Reference Point: Top of 18 inch casing 0.34 feet below base of pump at floor level of house.

Elevation of reference point: 2094.5

	Date		Pist. R.P. to water surface		Dŧ	a te		Dist. R.P. to weter surface	
Sept.	19, 1930	:	10.7	:	Apr.	27,	1932:	a	7.0
Dec.	19, 1930	:	a 9.4	:	May	10,	1932:	а	7.3
Ma.y	27, 1931	:	a 9.5	:	Aug.	8,	1932:		8.0
Aug.	13, 1931	:	10.5	:	Tov.	15,	1932:		8.4
Nov.	24, 1931	:	10.0	:	Jan.	23,	1934:	а	8.2
Mar.	17, 1932	:	a 7.5	:			:		

a - Pumping 300 feet northwest.

-000

- 2 11/4

the state of the s

M-83

M. E. Richardson

Location and Description: Near southeast corner of SV_4^1 of SE_4^1 , Sec. 30, T.10 N., R.1 W., S.B.B.& M. It big cottonwood.

Use: Domestic.

Reference Point: Top of concrete foundation for pump 1.1 feet above ground.

Elevation of reference point: 2152.5

-	Date		t. R.P. to er surface		Dato		Dist. R.P. to water surface
	4, 1930 19, 1930	:	72.1 73.3	May Aug.	•		73.6 74.2

M-84

Mrs. Gilham

Location and Description: In southeast corner of $NE_{4}^{\frac{1}{2}}$ of $NW_{4}^{\frac{1}{4}}$, Sec. 31, T.10 N., R.1 W., S.B.B.& M. In engire house at tank on west side of street. Use: Domestic and irrigation.

Reference Point: Hole in pump base 0.5 feet above top of concrete foundation.

Elevation of reference point: 2130.7

	Date			ist. R.P. to			Date			Dist. R.P. to water surface
Dec. May Aug.	19, 27, 13,	1930 1931 1931	:	49.6 50.1	:	Apr. May Aug. Nov.	10,	1932 1932	:	47.1 47.0 48.8 48.7

M-85

E. M. Hawes

Location and Description: In southeast corner of NE1, Sec. 31, T.10 N., R.1 W., S.B.B.& M. Across from old Chas. Mitchel house.

Use: Domestic.

Reference Point: Top of 2 inch clamp on cylinder at average ground level. Elevation of reference point: 2094.1

	Dato			: Dist. R.P. to : : water surface :								Dist. R.P. to water surface
			:				:		-		:	
Oct.	20,	1919	:	*	11.6		:	Mar.	17,	1932	:	9.0
Apr.	4,	1930	:		10.0		:	Apr.	27;	1932	:	8.4
Dec.	19,	1930	:	a	11.5		:	May	10,	1932	:	8.3
May	7,	1931	:		11.9		:	Aug.	8,	1932	:	10.6
Aug.	13,	1931	:		12.7		:	Nov.	15,	1932	:	10.4
Oct.	7,	1931	:		12.7		:	Jan.	23,	1934	:	10.2

^{*} Measurement from W.S.P.578, page 435, well 60.

a - Pumping 300 feet south.

-11 1 111 - 1 1 11 A THE PARTY OF PERSONS ASSESSED.

M-86

A.B.Jenson

Location and Description: In southwest corner of $\mathbb{N}^{\frac{1}{4}}$ of $SE_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 31, T.10 N., k.1 W., S.F.3.8 M. South of old road to Hinkley. Reference Point: Top of 2" x 12" across pit at ground level, and 5.0 feet above top of 12 inch casing. Elevation of reference point: 2097.3

	Date		st. R.P. to ter surface	D	ate			Dist. R.P. to water surface		
May Dec. May Aug.	30, 1930 19, 1930 27, 1931 13, 1931	: : : : : : : : : : : : : : : : : : : :	14.1 14.0	:	Mar. Apr. May Aug. Nov.	27, 10, 8,	1932 1932 1932	: :	10.1 9.7 9.8 12.4 12.2	

^{*} Measurement from W. P. Rowe.

M - 87

Compton

Location and Description: In SW_{4}^{1} of NE_{4}^{1} , Sec. 32, T.10 N., R.1 W., S.B.B.& M. This is old pumping plant near house. Red iron pump house. Reference Point: Top of 8" x 16" stringer across big pit at about average ground level. Elevation of reference point:

	Date		R.P. to surface	-		Ds te	and the second second second second			R.P. to	
Oct. May	13, 1927 11, 1927 30, 1930 21, 1931	*	11.3 14.3 15.0	:	Nov. Mar. May	23,	1932	:	æ	15.6 13.1 13.0	

^{*} Measurement from W. P. Rowe.

11-88

Sandoz

Location and Description: In NW4 of NW2, Sec. 33, T.10 N., R.1 W., S.B.B.& M. Old windmill north of highway.

Use: Not used.

Reference Point: Top of 4" x 4" wood clamp on 4" x 6" clamps 0.65 feet above top of 12 inch casing and 1.6 feet above ground.

Elevation of reference point:

	Date		st. R.P. to ter surface	-	D	ate	 -	Dist. R.P. to water surface
v	30, 1930 31, 1931	: :	30.3 30.8		Nov.			31.8 29.5

a - Pumping.



M-89

Location and Description: In NE¹ of NW¹, Sec. 4, T.9 N., R.1 W., S.B.B.& M. Well in field near concrete box.

Reference Point: Top of 8 inch screw casing in pit at old pumping plant 4.7 feet below average ground.

Elevation of reference point:

	Date		ist. R.P. to	:		Date			Dist. R.P. to water surface
May	30, 1930	:	5.2	:	Jan.	21,	1931	:	Filled

M-90

L. P. Haney

Location and Description: In NVE of NEE, Sec. 4, T.9 N., R.1 W., S.B.R.& M.

Use: Not used.

Reference Point: Top of 7 inch galvarized iron casing on well in duck pond, 1.3 feet above ground. Elevation of reference point:

	Date	: Dist. R.P. to : water surface	• • • • • • • • • • • • • • • • • • • •	
Oct.	11, 1927 6, 1928	•	: May 30, 1930 : 6. : Jan. 21, 1931 : 7.	Ī.

^{*} Measurement from W. P. Rowe.

M-91

R. Harlan

Location and Description: In $\mathbb{N}^{\frac{1}{4}}$ of $\mathbb{N}^{\frac{1}{4}}$, Sec. 10, T.9 N., R.1 W., S.B.B.& M. This is old pumping plant in the house south of large concrete reservoir.

Reference Point: Top of railroad tie curb on north 1.4 feet above ground and 6.25 feet above top of casing in pit.

Elevation of reference point:

	Date		Dist. R.P. to water surface			Date			Dist. R.P. to water surface
		:		:				:	
June	12, 1984	:	*11.4	:	Nov.	24,	1931	:	16.0
Sept.	12, 1925	:	*13.4	:	Mar.	23,	1932	:	8.8
Oct.	11, 1927	:	* 9.8	:	May	1,	1932	:	b 6.
Oct.	6, 1928	:	*12.9	:	May	26,	1932	:	7.1
May	30, 1930	:	a 28.0	:	Mov.	15,	1932	:	10.1
Jan.	21, 1931	:	14.9	:				:	

^{*} Measurement from W. P. Rowe.

a - Pumping

b - Measurement from owner.



M - 92

Gibbs

Location and Description: In $NE_{4}^{\frac{1}{4}}$ of $NE_{4}^{\frac{1}{4}}$, Sec. 10, T.9 N., R.1 W., S.B.B.& M. About 200 feet south of house.

Use: Irrigation.

Reference Point: Top of square wood curb in underground house for pump. 7.3 feet below cover on pit.

Elevation of reference point:

	Date		Dist. P.P. to water surface		D	ate			Dist. R.P. to water surface
		:		:				:	
Sept.	12, 1925	:	* 10.	:	Nov.	24,	1931	:	10.7
Oct.	11, 1927	:	* 4.7	:	Mar.	23,	1932	:	5.2
Oct.	6, 1928	:	* 7.8	:	May	26.	1932	:	3.2
	30, 1930		9.9	:	Nov.	15,	1932	:	5.1
Jan.	21, 1931	:	10.2	:				:	

^{*} Measurement from T. P. Rowe.

M-92 A

Location and Description: In $NE_4^{\frac{1}{4}}$ of $NE_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 10, T.9 N., R.1 W., S.B.8. M. 600 feet southwest of M-92 Reference Point: Top of 12 inch casing in tie curbed pit 4.6 feet below top.

Elevation of reference point:

	Date		st. R.P. to		ח	ate		•	Dist. R.P. to water surface
May	6, 1928 30, 1930 21, 1931	:	*8.5 10.2 10.1	:	Mar. May Nov.	26,	1932	:	5.2 3.7 5.4

^{*} Measurement from W. P. Rowe.

M - 93

Location and Description: In $NW_{\overline{a}}^{1}$ of $NW_{\overline{a}}^{1}$, Sec. 11, T.9 N., R.1 W., S.B.B.& M. This is the "Fish Pond", a well known watering place on the old overland road. There was always water here. Only one small dug hole with water. No fish.

Use: Domestic.

Reference Point: Top of two 6" x 6" timber bridge across fish pond. Elevation of reference point:

 Date		ist. R.P. to ater surface	-	Date		Dist. R.P. to water surface
30, 1930 21, 1931	:	8.7 8.6	:	Nov. 24, 1931	:	9.2

10-11-0-11

	100	

1 600

		35-5

10

	201	-92	

M - 94

Stone

Location and Description: Near center of $S_{\overline{z}}^{\frac{1}{2}}$ of $NE_{\overline{z}}^{\frac{1}{2}}$, Sec. 11, T.9 N., R.1 W., S.B.B.& M.

Reference Point: Top of 6" x 14" timber at windmill east of house, 0.5 feet above ground and 1.7 feet above top of casing.

Elevation of reference point:

Date	: Dist. R.P. to : water surface	•	: Dist. F.P. to : water surface
Sept. 12, 1925	: : * 21.3	: May 30, 1930	: 17.5 dry
Oct. 11, 1927	: * dry	:	:

* Measurement from W. P. Rowe.

M-96

C.A.Leak

Location and Description: In northeast corner of Sec. 8, T.9 N., R.1 W., S.B.B.& M. At hog farm on State Highway east of Barstow. Small concrete lined reservoir just west of well. Tank south of well.

Use: Domestic.

Reference Point: Top of casing level with top of concrete slab, 0.5 feet above ground.

Elevation of reference point:

	Date	: Dist. P.P. to : water surface	-	Pate		Dist. R.P. to water surface
May	24, 1922	* 98.5 ** 84.2 * 93.6	:	Aug. 13, 1931 Mar. 17, 1932 May 11, 1934	:	a 98.0 a 93.3 a 94.1

- * Measurement from W.S.P.578, page 435, well 66; and page 471, well 149. a Windmill pumping.
- ** Measurement from W. P. Rowe.

M-97

Greystone Auto Camp.

Location and Description: In $\mathbb{N}\mathbb{V}_{4}^{1}$ of $\mathbb{S}\mathbb{V}_{7}^{1}$, Sec. 10, T.9 N., R.1 W., S.B.B.& M.

Use: Domestic.

Reference Point: Top of wood planks 0.14 feet shove top of casing, and 0.8 feet above ground.

Elevation of reference point:

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
19, 1930 17, 1932	: 59.4 : a 52.3	: Apr. 26, 1932	: 51.2 :

a - Windmill pumping.

100000000000000000000000000000000000000			

	-	7.30	
			10/ 1/2

ACTOR OF THE PARTY

1111			

M-98

Location and Description: In $SW_{\frac{1}{4}}^{\frac{1}{2}}$ of Sec. 12, T.9 N., R.1 W., S.B.B.& M.

Reference Point: Top of 12 inch casing in box at Van Dyke ditch just below sand box gate.

Elevation of reference point: 1994.8

D	nte		Dist. R.P. to water surface		and the second second	Date			Dist. P.P. to water surface
Feb. 21 Mar. 7 Mar. 19 Apr. 16 Apr. 23	, 1930 , 1930 , 1930	:	11.0	:	May Jan. Aug. Nov. Feb.	21, 13, 23,	1931 1931 1931	:	12.7 13.8 15.1 15.1 7.3

M-99

Mamantain

Location and Description: In NE_{4}^{1} of NE_{4}^{1} of Sec. 13, T.9 N., R.1 W., S.B.B. W. Just north of Van Dyke ditch - 200 feet west of Range line and at end of pipe line to tank on sand hill.

Use: Not used.

Reference Point: Top of sill of curb of dug well with casing on south side at ground level.

Elevation of reference point: 1993.0

	Date			Dist. R.". to water surface	-		Date			Dist. R.P. to water surface
Sept. Feb. Oct.	16, 11,	1927 1927	:	* 13.3 * 8.9	:	Feb. May Jan.	30,	1930	:	22.8 23.3 Dry

^{*} Measurement from W. P. Rowe.

M-100

F. Byerse

Location and Description: In NW2 of NE2, Sec. 13, T.9 N., P.1 W., S.B.& M. Gas engine in galvarized iron pump house.

Reference Point: Top of 12 inch casing in pit 8.87 feet below bottom of tie cover which is 0.4 feet above ground.

Elevation of reference point: 1992.9

	D: te		ist. F.P. to ater surface		D	ate)			Dist. P.P. to water surface
	20 2004	:		:				:	
Sept.	12, 1925	:	* 4.0	:	Oct.	23,	1928	:	* 14.0
Mar.	20, 1926	:	* 14.8	:	Jan.	20,	1930	:	18.5
Feb.	16, 1927	:	* 9.4	:	Fob.	27,	1930	:	17.8
Feb.	28, 1927	:	* 0	:	Mr.y	30,	1930	:	18.5
May	12, 1927	:	* 0	:	Jon.	21,	1931	:	19.6
June	22, 1927	:	* 1.3	:	Aug.	13.	1931	:	21.3
Cet.	11, 1927	:	* 5.0	:	Nov.	13,	1931	:	21.2
Sapt.	23, 1928	:	* 13.5	:	Feb.	16.	1932	:	12.3

^{*} Measurement from W. P. Rowe.

M-101

Merrel

Location and Description: In southeast corner of Sac. 1, T.7 N., R.5 W., S.B.7.8 M. On bank at edge of active channel.

Reference Point: Top of 8 feet concrete curb 1.0 foot below average ground.

Elevation of reference point: 2477.4

	Da:	te		st. R.P. to	-		Date	9		Dist. R.P. to water surface
			:		:				:	
Oct.	4,	1930	:	27.8	:	Mar.	8,	1932	:	25.5
Mar.	19,	1931	:	25.8	:	Ney	23,	1932	:	26.0
P. S. A	20,		:	26.1	:	July	6,	1932	:	26.4
Aug.	5,	1931	:	27.6		Dec.				26.2
Nov.	5,	1931	:	26.4	:		ĺ		:	

17

-

					7.0	2
17070						
	1	-	10,000	•		100

. -

1991	
 = "3"41	ATT SEE THE
	and the same
17.7	

M-105

Jones

Location and Description: In $NW_{\frac{1}{2}}$ of $NW_{\frac{1}{2}}$, Sec. 30, T.6 N., R.4 W., S.B.F.& M. Hand nump at cottage above Jones house.

Use: Domestic.

Reference Point: Top of wood pump base 2.4 feet above ground.

Elevation of reference point:

	Date	Dist. R.P. to water surface		Date	•	Dist. R.P. to water surface
,	17, 1930 20, 1930		:	Nay 15, 1931	:	1,4.4

M-106

Location and Description: In northwest corner of NW_2^1 of SW_Z^1 , Sec. 2, T.7 N., R.5 W., S.B.8 M. Fremont Trail. 1.3 miles west of sign at southeast corner of Merril clearing. Tin house 500 feet southwest of well.

Use: Not used.

Reference Point: Top end of 1" x 6" upright in well curb on south side 0.9 feet above ground.

Elevation of reference point: 2523.3

	Date	_	Dist. R.P. to water surface		-	Date	9	-	Dist. R.P. to water surface
Mar.	13, 1930 19, 1931 20, 1931	:	98.2 98.2 98.1	:	Aug. Mar. July	8,	1932	:	98.1 98.2 98.2

- 11 5 L 170 - 77 77 LE CONTRACTOR DESIGNATION 11----4 500 -0 , , 4 ---.

L-l

B. A. Funk

Location and Description: Southwest corner of NV2, Sec. 18, T.9 N., R.1 E., S.B.R.& M. South side of Van Dyke Ditch above Greer's rench. Use: Irrigation.

Reference Point: Top of 4" x 6" well curb on south side at average ground level.

Elevation of reference point: 1996.8

		:	Dist. R.P. to	:	· · · · · · · · · · · · · · · · · · ·			:	Dist. R. P. to
	Date	:	water surface	:		Date		:	water surface
		:		:				:	
Sept.	12, 1925	:	* 25.8	:	Mar.	19,	1930	:	30.1
Mar.	21, 1926	:	* 26.0	:	Apr.	16,	1930	:	32.0
Feb.	16, 1927	:	* 20.0	:	May	7,	1930	:	30.8
May	12, 1927	:	* 10.3	:	May	29,	1930	:	30.8
June	22, 1927	:	* 10.8	:	Jan.	21,	1931	:	30.8
oct.	11, 1927	:	* 15.2	:	Apr.	23,	1931	:	32.3
Nov.	23, 1928	:	* 25.8	:	Aug.	12,	1931	:	33.2
Dec.	12, 1928	:	* 25.8	:	Nov.	23,	1931	:	33 .7
Jan.	20, 1930	:	29.6	:	Feb.	16,	1932	:	25.9
Teb.	21, 1930	:	30.0	:	Apr.	6.	1932	:	11.4
Peb.	27, 1930	:	30.0	:	Mar.	30,	1934	:	24.9
Mar.	7, 1930	:	30.0	:				:	

^{*} Measurement from W. P. Rowe.

L-2

R. Greer

Location and Description: In northeast corner of SW2, Sec. 18, T.9 N., R.1 E., S.B.B.& M. North side of Van Dyke Ditch and west of house.

Use: Domestic.

Reference Point: Top of 12 inch casing in pit 7.2 feet below top of curb at ground level and 8.4 feet below top of 2" x 6" timber across pit.

Elevation of reference point: 1984.9

Date		st. P.P. to ter surface	Ι)ate	•	Dist. F.P. to water surface
23, 1919 10, 1919	•	* 17.7 * 17.3	Jan. Apr.	- 1		* 18.0 12.3

^{*} Measurements from W.S.P. 578, page 490, well 42.



L-3

R. Greer

Location and Description: In northeast corner of $SW_4^{\frac{1}{4}}$, Sec. 18, T.9 N., R.1 E., S.B.B.& M. Just south of center of Sec. 18 and north of Greer's house.

Use: Domestic.

Reference Point: 1 inch board around suction pipe of small pump at ground level 1.8 feet above 12 inch casing in pit.
Elevation of reference point: 1986.8

	Da ·	te			R.P. to			Date			Dist. R.P. to water surface
			:			:				:	
Apr.	7,		:		17.5	:	Oct.	11,	1927	:	* 12.5
June	12,	1924	:	*	18.5	:	Sept.	23,	1928	:	* 22.9
Aug.	12,	1925	:	*	19.3	:	Feb.	27,	1930	:	27.7
Feb.	16,	1927	:	*	18.4	:	May	29,	1930	:	28.5
May	12,	1927	:	*	5.3	:	Jan.	20,	1931	:	27.8
June	22,	1927	:	*	7.0	:				:	

^{*} Measurement from W. P. Rowe.

L-4

Location and Description: In southwest corner of SW_4^1 , Sec. 16, T.9 N., R.1 E., S.B.8.8 M. Old well near Borax Works.

Use: Not used.

Reference Point: Top of wooden curb on east side 3.0 feet above ground level.

Elevation of reference point: 1994.0

Date		R.P. to		Date	-	t.RP to er surface
13, 1917						b 88.5
16, 1918 23, 1919					1927 : 1930 :	71. Dry 61. Dry
10, 1919		0.0 =	1:0.%	20,	1000 :	01. 141 y

- * Measurements from W.S.P. 578, page 490, Well 45.
- a The accuracy of this measurement is questionable.
- b Pumping.
- ** Measurement from W. P. Rowe.

-1

-1-1		-17.59	ATTECH
	78.75		all the same and

•			
· · · · · · ·			

~ · •	•	
311		The second
*		

	•	
	0.00	

B. Lamantain

Location and Description: In northeast corner of $NW_4^{\frac{1}{4}}$, Sec. 21, T.9 N., k.1 F., S.E.B. M. In town of Daggett.

Use: Domestic.

Reference Point: Top 2" x 12" redwood curb 2.5 feet above ground on east side and 1.67 feet above top 4" x 6" timber bolted through derrick. Elevation of reference point: 1994.5

	Da te		ist. R.P. to ater surface			Date		Dist. R.D. to water surface
	24, 1919 22, 1920		* 78.5 * 86.0			16, 1922 16, 1927		** 56.9 ** 82.4
May	24, 1922 15, 1922	:	** 56.8 ** 60.7	:	May	29, 1930 20, 1931	:	84.5 97.4

^{*} Measurement: from W.S.P. 578, page 490, Well 46, corrected for change in reference point.

L-6

Van Dyke

Location and Description: Near center of NM_4^1 , Sec. 22, T.9 N., R.1 E., S.B.B.& M. Near Van Dyke entrance to ranch.

Use: Domestic.

Reference Point: Top of casing on east side, level with ground surface. Elevation of reference point: 1969.0

	Date			. R.P. to r surface			Date				· I.P. r surf	
	05 3.03	:			:		3.0	2005	:		5 0.5	
Oct.	25, 1919) :	*	75.0	:	Aug.	13,	1925	:	**	76.0	
May	24, 1922	:	**	47.0	:	Feb.	20,	1930	:		70.7	•
Sept.	14, 192	2 :	**	50.2	:	May	22,	1930	:		73.3	
Dec.	16, 192	:	**	57.7	:	Apr.	22,	1931	:		80.9	
Jan.	22, 192	·	**	74.7	:	Lug.	12,	1931	:		76.8	

^{*} Measurement from W.S.P. 578, page 466, Well 47.

^{**} Measurement from W. P. Rowe.

^{**} Measurement from W. P. Rowe.

100

THE RESERVED AND DESCRIPTION OF THE PARTY OF

L-7

Town of Daggett

Location and Description: Near center of SW_7^1 , Sec. 16, T.9 N., R.1 E., S.B.B.& M. New well in wash. Derrick at galvanized pump house. Use: Funicipal.

Reference Point: Top of 2 inch curb on east side 1.9 feet above ground surface.

Elevation of reference point: 1977.4

Date	•	Dist. R.P. to water surface		Date		Dist. R.P. to water surface
 29, 1930 20, 1931	:	82.0 83.0	Aug. Nov.			83.2 83.3

L-8

Location and Description: Center of west line of $NW_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 24, T.9 N., R.1 E., S.B.R.& M. Near Catick's ranch. Reference Point: Top of 6 inch casing at wood clamp 0.5 feet above ground.

Elevation of reference point: 1953.6

	Date	 st. R.P. to ter surface	:		Date	•	Dist. R.P. to water surface
Feb.	20, 1930	71.8		July			71.7
May Mar.	22, 1930 17, 1932	72.3 74.7		Jan. Jan.	,	-	72 .2 74 . 3

L-9

Chester Swan

Location and Description: Near center of east line of $NE_{\frac{1}{2}}^{\frac{1}{2}}$, Sec. 24, T.9 N., R. 1 E., S.B.B.& M. West of house near section line. Use: Not used. Reference Point: Top of 8 inch casing 0.7 feet above ground. Elevation of reference point: 1944.2

	Date			R.P. to surface			Date			Dist wate:		
		:			:				:			
Oct.	24, 1919	:	*	51.0	:	Dec.	16,	1922	:		51.1	
Jan.	22, 1920	:	*	58.9	:	June	13,	1924	:		56.0	
May	22, 1922	:	**	52.4	:	Sept.	13,	1925	:	**	58.2	
Sept.	12, 1922	:	**	50.5	:	Feb.	20,	1930	:		57.6	Dry

^{*}Measurement from W.S.P. 578, page 490, Well 48.

^{**} Measurement from W. P. Rowe.



L-9 A

Chester Swan

Location and Description: Near center of east line of NE $\frac{1}{4}$, Sec. 24, T.9 N., F.1 E., S.4.9.& M. 30 feet south of L-9. Feference point: Cover at ground level under 12" x 12" timber. Elevation of reference point: 1943.6

	Date		Dist. P.P. to water surface	-		e		Dist. R.P. to water surface
Feb.	20, 1930	:	64.0	:	Dec. 7,	1931	:	

L-10

E. D. Barry

Location and Description: Near northwest corner of SW2, Sec. 20, T.9 N., R.2 E., S.B.B.& M. Just north of compressor and 50 feet north of 36 inch well.

Use: Domestic.

Reference Point: Top 24 inch casing 0.5 feet above ground. Rlevation of reference point: 1927.5

Date	: Dist. P.P. to : water surface		Dist. R.P. to water surface
Oct. 24, 1919 Oct. 1, 1925 Mar. 13, 1926 Mar. 6, 1927 May 5, 1928 Sept. 12, 1928 May 22, 1930	: ** 46.8 : ** 46.5 : ** 48.3 : ** 48.3 : ** 48.8	: Jan. 22, 1931 : May 7, 1931 : Mar. 17, 1932 : July 13, 1932 : Oct. 5, 1932 : Feb. 14, 1934 :	52.8 53.6 52.6 52.6

^{*} Measurement from W.S.P. 578, page 467, Well 61.

** Measurement from W. P. Rowe.

L-10 A

E. D. Barry

Location and Description: Near northwest corner of SW_4^1 , Sec. 20, T.9 N., R.2 E., S.B.8.8 M. 50 feet west of L-10. Use: Irrigation.

Reference Point: Top of 16 inch casing 2.0 feet above ground. Elevation of reference point: 1929.4

	Date	: Dist. R.P. to : water surface	·	Dist. R.P. to water surface
May	22, 1930 7, 1931 17, 1932	54.8	: July 13, 1932 : Oct. 5, 1932 : Feb. 14, 1934 ;	



Minneola Service Station.

Location and Description: Near center of Sec. 28, T.9 N., P.2 E., S.R.B.& M. 800 feet south of Minneola Service Station.

Use: Domestic.

Reference Point: Top of 12" x 12" timber on south side of pit at ground level and 0.95 feet above iron casing.

Elevation of reference point: 1908.4

		•	Dist. R.P. to			,	***************************************	•	Dist. P.P. to
	Date	:	water surface	:	Da	te		:	water surface
		:		:				:	
May	29, 1930	:	36.2	:	Apr.	28,	1932	:	3 7. 8
Dec.	7, 1931	:	38.1	:	Sept.	23,	1932	:	37.6

L-12

F. H. Webber

Location and Description: Pear center of west line of NW2, Sec. 27, T.9 N., R.2 E., S.E.P.& M. 30 feet east of house.

Use: Domestic.

Reference Point: Top of 2" x 6" wood clamp 0.15 feet above top of casing and 0.5 feet above ground.

Elevation of reference point: 1900.6

Date		R.P. to r surface			Date			Dist. R.P. to water surface
May 23, 19 Sopt. 12, 19 Dec. 16, 19 Feb. 20, 19 May 22, 19	22 : * 22 : * 30 :	27.1 26.0 26.0 30.4 30.6	:	Oct. Jan. May Apr.	22,	1931 1931	:	31.3 dry 31.8 32.2 32.6

^{*} Measurement from W. P. Rowe.

L-13

D. E. Thompson.


Location and Description: In northwest corner of SE¹/₄, Sec. 27, T.9 N., R.2 E., S.B.B.& M. Northwest corner of field at south edge of State Highway.

Reference Point: Top of 36 inch iron casing 1.5 feet above ground. Elevation of reference point: 1903.1

	Date	: Dist. R.P. to : water surface		<u> Pate</u>		R.P. to surface
Sent	1, 1917	: * 29.9	:	May 29, 1930	:	34.8
_	25, 1919	* 31.2		Jan. 21, 1932		36.3
May	23, 1922	: ** 31.5	:	Apr. 28, 1932	:	36.1
Mar.	13, 1926	: ** 31.9	:	July 13, 1932	:	36.1
Feb.	24, 1929	** 33.6	:	Sept. 23,1932	:	36.1
Feb.	20, 1930	: 34.5	:		:	

^{*} Measurement from W.S.P. 578, page 490, Well 71.

^{**} Measurement from W. P. Rowe.

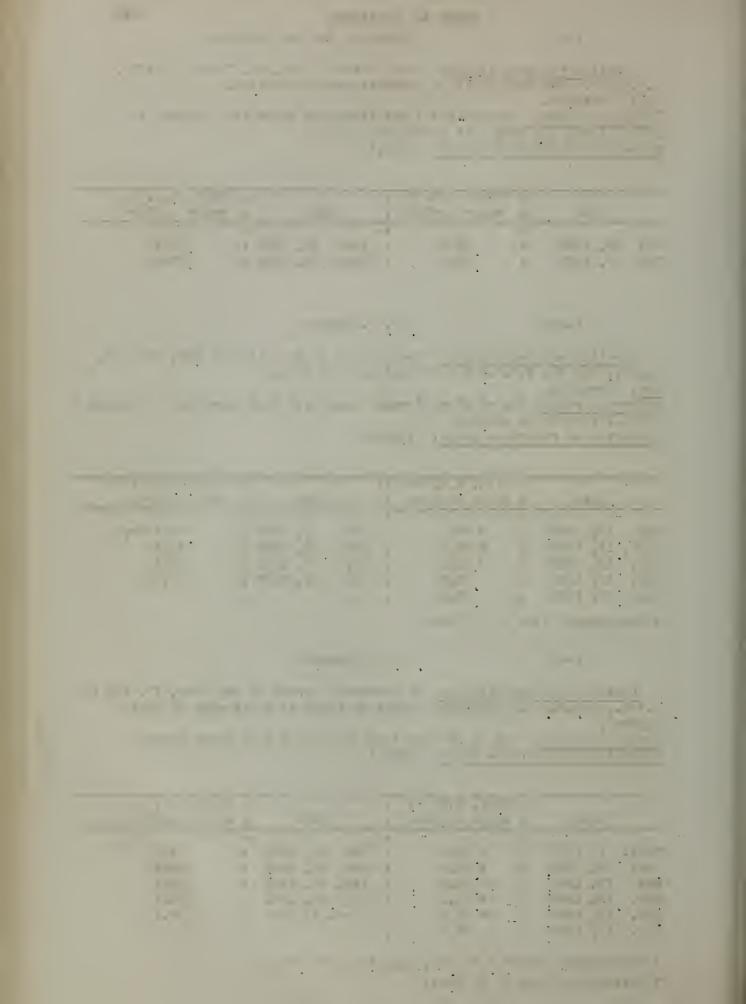

T. Taylor Estate

Location and Description: Near center of west line of $NV_2^{\frac{1}{2}}$, Sec. 26, T.9 N., R.2 E., S.B.B.& M. Pumping plant north of house and northwest of barn with mortise and tenon joints.

Use: Not used.

Reference Point: 3 notches in 8" x 8" timber across wood at northeast corner of pit at ground level.

Elevation of reference point: 1890.0

Date	: Dist. R.P. to : water surface	•	Dist. R.P. to water surface
Oct. 30, 1919 May 8, 1930	: * 20.6 : 23.8	: Jan. 22, 1931 :	24.2

* Measurement from W.S.P. 578, page 467, Well 75.

L-15

Miller

Location and Description: In northwest corner of $SE_{\xi}^{\frac{1}{\xi}}$, Sec. 24, T.9 N., R.2 E., S.B.8. M.

Use: Domestic.

Reference Point: Top of 10 inch casing in unlined pit 4 feet deep and 10.84 feet below first horizontal brace on windmill tower.

Elevation of reference point: 1859.8

Date	: Dist. R.P. to : water surface	·	Dist. R.P. to water surface
2 2 2 2 2 2	: : 3.8 : 4.3	: May 7, 1931 : Feb. 26, 1932 :	6.1 4.2
	: 4.2	: Apr. 27, 1932 :	5.2

L-15 A

Location and Description: In northwest corner of SE_{4}^{1} , Sec. 24, T.9 N., R.2 E., S.B.B.& M. 10 feet south of L-15 Reference Point: Top of 30 inch iron casing in pump house. Elevation of reference point: 1857.9

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
May 22, 1930 Oct. 9, 1930	: 2.5 : 2.6 : 3.1 : 2.8	: May 7, 1931 : Feb. 6, 1932 : Apr. 27, 1932 : July 13, 1932	: 2.9 : 2.8

a - Windmill pumping.

The second secon

THE PARTY OF THE P

100000		-					
THE PARTY NAMED IN						-	
					ala s		4000
				00			

a contract the second s

1100

				9 1
		-	~	

	TARRET OF	
. 349		

8217			
	110		

					11 1			
						-	210	<u> </u>
			275	X			-1-	
	1							•
• *					7-7			

L-16

Frey

Location and Description: Near center of SW_4^1 , Sec. 19, T.9 N., R.3 E., S.B.B.& M. Past of adobe house and south of adobe engine house. Use: Not used.

Reference Point: Top of 12 inch casing (split) 2.0 feet above ground

near concrete water box.

Elevation of reference point: 1858.8

	Da	te			R.P. to surface			Date			Dist. R.P. to water surface
	7.0	7.07.0	:			:			1007	:	0. 7
Dec.	•	1919	:		Flowing		May	•			2.3
May	22,	1922	:	**	Flowing	:	Apr.	27,	1932	:	2.2
May	8,	1930	:		1.6	:	July	13,	1932	:	2.6
May	22,	1930	:		1.7	:	July	11,	1933	:	2.7
Oct.	9,	1930	:		2.2	:	Feb.	14,	1934	:	3.3
Jan.	22,	1931	:		2.2	:				:	

- * Measurement from W.S.P. 578, page 468, Well 85.
- ** Measurement from W. P. Rowe.

L-16 A

Edwards

Location and Description: Near center of west line of $NW_{\frac{1}{4}}$, Sec. 19, T.9 N., R.3 E., S.B.3.& M.

Use: Old Edwards well to irrigate beyond dunes.

Reference Point: Top of 12 inch casing. Elevation of reference point: 1860.1

	Date	-	Dist. F.P. to water surface	-		Date			Dist. R.P. to water surface
May May	22, 1922 8, 1930		0		May Feb.				2.4 2.2
May Jan.	22, 1930 22, 1931	:	1.5	:	Apr. July	27,	1932	:	2.0 2.4

^{*} Measurement from W. P. Rowe.

_____,

		30.43
in the second of		.0=0 (c* == 0
	in the same V	

			-
.:	100-01 at 1-00-01 at 1-01-01 at	10.1.12	
	 	m - , ,	.15

The second secon

1000		- 10-7-11	110	
	.==			3/18

Hatch:

Location and Description: In northeast corner of SEZ, Sec. 30, T.9 P., R.3 P., S.3. P. Southwest of house.

Use: Domestic.

Reference Point. Top of wood cover with hand pump 0.3 feet above concrete carb 1.3 feet shove ground.
Elevation of reference point: 1852.9

	Date	•	Dist. R.P. to water surface	Pate		Dist. F.P. to water surface
Dec.	•		* Flowing ** Flowing			2.2 2.3
May			1.9	~		2.0

^{*}Measurement from W.S.P. 578, page 468, Well 87.

L-18

Berden

Location and Description: Near center of east line of NE4, Sec. 52, T.9 N., P.3 H., S.E. & T. In rear of store at Newberry north of railroad. Use: Not used.

Reference Point: Top of 7 inch galvarized iron casing 0.5 feet above ground.

Elevation of reference point: 1835.4

	Date		Dist. P.P. to water surface		Date		Dist. F.P. to water surface
Feb.	23, 1922 20, 1930 8, 1930	:	4.4	May Apr.			3.7 4.1

^{*} Measurement from W. P. Rowe.

L-18 A

Berden

Location and Description: Near center of east line of FE_4^1 , Sec. 32, T.9 N., R.3 R., S.B.B.& M. Just south of L-18.

Use: Domestic.

Feference Point: Top of 9 inch casing 1.2 feet above ground level. Elevation of reference point: 1836.3

	: Dist. R.P. to : water surface	· ·	: Dist. K.P. to : water surface	
Feb. 20, 1930 Dec. 7, 1931 May 23, 1932	: 6.0	: : Ipr. 27, : Jan. 11,		

^{**} Measurement from W. P. Rove.



L-19

Klinkenbeard.

Location and Description: In northwest corner of NW., Sec. 34, T.9 N., R.3 E., S.B.B.& M.

Reference Point: Top of wood curb 0.3 feet above well cover which is at ground level.

Elevation of reference point: 1827.9

	Date		Dist. H.P. to water surface		De	ate			Dist. R.P. to water surface
Nov.	18, 1919	:	* 29.4	:	Mar.	23,	1932	:	28,6
May	22, 1922	:	** 29.2	:	Apr.	27,	1932	:	28.5
Feb.	28, 1930	:	28.2	:	Feb.	14,	1934	:	29.2

^{*}Measurement from W.S.P. 578, page 469, Well 111, corrected for change in reference point.

L-20

Dr. Lyle Graham

Location and Description: Near northwest corner of $NE_{2}^{\frac{1}{2}}$, Sec. 4, T.8 N., R.3 E., S.B.5.6 M. At northest corner of reservoir. 10 feet west of L-21. Use: Irrigation.

Reference Point: Top of 3 foot concrete curb.

Elevation of reference point: 1821.4

	Date		Dist. R.P. to vater surface			Date		Dist. F.P. to water surface
June	15, 1930 5, 1931 7, 1931	:	Flowing Flowing Flowing	:	Apr.	28, 1932	:	Flowing Flowing Flowing

L-21

Dr. Lyle Graham

Location and Description: Near northwest corner of NE_2^1 , Sec. 4, T.8 N., P.3 E., S.P.R.& M. Red windmill tower with Aermotor windmill at northeast corner of reservoir, and 10 feet east of L-20.

Use: Irrigation.

Reference Point: Top of 10 inch casing inside of 12 inch casing at ground level.

Elevation of reference point: 1819.0

	Date		st. P.P. to ter surface			Date	9	_	Dist. R.P. to water surface
Apr.	3 3	: : :	2.3 2.4 2.9	:	Feb.	26,	1931 1932 1932	:	3.0 0.5 2.7

^{**} Measurement from W. P. Rowe.

THE RESERVE TO SERVE THE PARTY OF THE PARTY . . . 2

Dr. Lyle Graham.

Location and Description: Near northwest corner of NE_4^1 , Sec. 4, T.8 N., R.3 E., S.B.R.& M. Well at west end of pump house. South of L-20.

Use: Irrigation and Domestic.

Reference Point: Floor level of concrete pit at ground level.

Elevation of reference point: 1819.6

	Da	te		Dist. R.P. to water surface		Date	9	Dist. R.P. to water surface
May			:	* 3.1	June			3.3
Sept. Dec.	-	1922 1922	:		Dec. Jan.			3.4 2.5
Feb. Apr.	•		:		Feb. Mar.	•		1.0
Oct.	-		:		Apr.	-		2.6

* Measurement from W. P. Rowe.

L-23

C. W. Beaverstock

Location and Description: In southwest corner of $\mathbb{N}\mathbb{N}^{\frac{1}{4}}$, Sec. 3, T.8 N., R.3 E., S.B.B.& M. Old 4 leg iron windmill tower 150 feet northeast of road intersection.

Use: Not used.

Reference Point: Top of 9 inch perforated casing at average ground level. Elevation of reference point: 1819;6

	Date	•	et. R.P. to er surface	_		Date			Dist. R.P. to water surface
Mar.	1, 1930	:	4.5	:	Apr.	28,	1932	:	3.8
	15, 1930 23, 1931	:	4.0 3.9	:	Dec.	9,	1932	:	5.3

L-24


Location and Description: Near southeast corner of NW2, Sec. 3, T.8 N., R.3 E., S.B.B.& M. Just north of small rock hill.

Reference Point: Top of 10 inch perforated casing 2.0 feet above ground.

Elevation of reference point: 1826.0

	Date		ist. R.P. to ater surface		Date		Dist. R.P. to water surface
v		:	22.7 a 23.3	Apr.			22.4 a 23.4

a - Windmill pumping slowly.

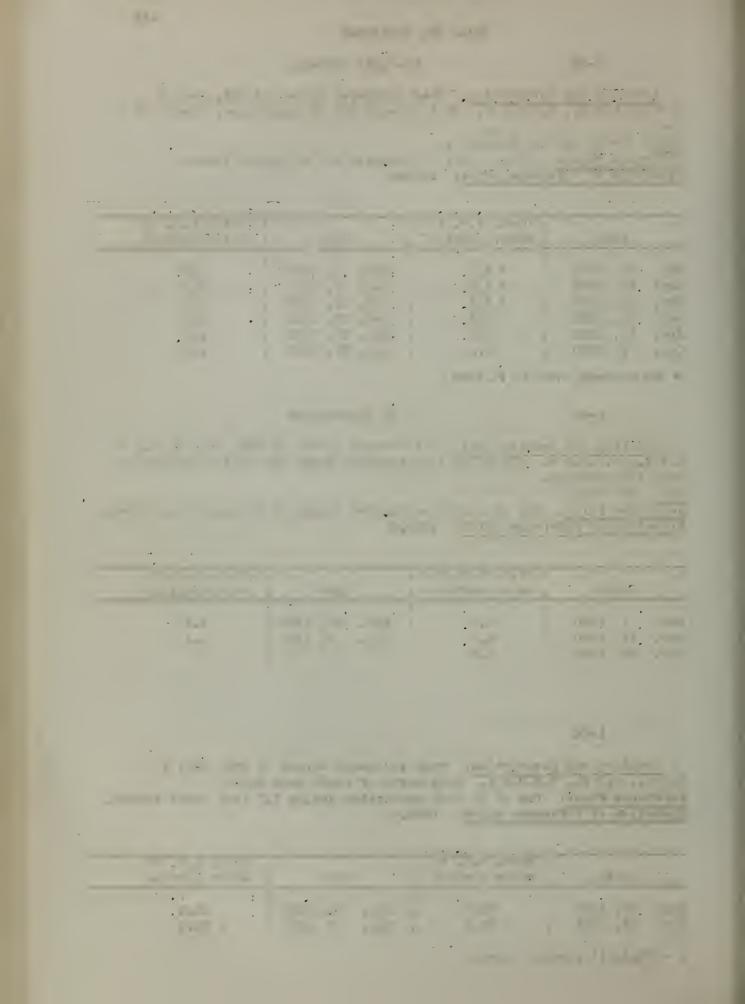

Callender

Location and Description: Near southeast corner of $SW_{4}^{\frac{1}{4}}$, Sec. 2, T.8 N., R.3 E., S.B.8.8 M. North of old road at northeast corner of small concrete reservoir, near old adobe service station.

Use: Not used.

Reference Point: Top of 12 inch casing 0.5 feet above ground.

Elevation	of reference	point:	1826.7

	Date	 R.P. to surface	-		Date		-	Dist. P.P. to water surface
Feb.	22, 1922 20, 1930 15, 1930		:	Apr. Apr. Dec.	28,	1932	:	37.7 38.4 37.6 dry.

^{*} Measurement from W. P. Rowe.

L-26

Douglass Sayre

Location and Description: Near center of $NW_{\frac{1}{4}}$, Sec. 2, T.8 N., R.3 E., S.B.B.& M.

Reference Point: Top of 12 inch galvanized iron casing at ground level. Elevation of reference point:

-	Date	st. R.P. to ter surface		Date	•	 R.P. to surface
Feb.	20, 1930 29, 1930	21.5 21.5	Apr.	,		21.7

a - Pumping

L-27

I. L. Hannan

Location and Description: In northwest corner of NW2, Sec. 12, T.8 N., R.3 E., S.B.B.& M. At old pumping plant north of old road, no buildings. Reference Point: Top of wood curb at ground level at northeast corner of pit.

Elevation of reference point: 1813.4

	Date	: Dist. R.P. to : water surface	•	Date	Dist. R.P. to water surface
Nov. Feb.	26, 1919 20, 1930			Apr. 23, 1931 Apr. 28, 1932	26.6 26.8

^{*} Measurement from W.S.P. 578, page 470, Well 130.

C. E. Burckhartt

Location and Description: Near southwest corner of $SW_{\bar{q}}^1$, Sec. 7, T.8 N., R.4 E., S.B.& M. Old pumping plant in athel grove. Use: Not used.

Reference Point: Top of 36 inch perfordted iron casing 1.4 feet above ground.

Elevation of reference point: 1820.1

	Date	R.P. to r surface		I	Date	-	Dist. R.P. to water surface
Feb.	20, 1930	37.5	:	Apr.	•		37.6
Apr. May	15, 1930 29, 1930	37.6 37.6	-	Jan. Apr.	- 1	1932:	37.4 37.4

L-28 A

George C. Shafer

Location and Description: Near southwest corner of NW, Sec. 7, T.8 N., R.4 E., S.B.B.& M.

Reference Point: Top of 36 inch casing, 0.2 feet above ground. Elevation of reference point: 1803.2

	Date		Dist. R.P. to water surface		Dat	e e			Dist. R.P. to water surface
Dec. May May Apr.	11, 1919 22, 1922 29, 1930 23, 1931	:	** 24.5 23.4	:	Jan. 2 Apr. 2 June 2 Dec.	28, 23,	1932 1932	:	22.8 24.3 23.3 23.0

- * Measurement from W.S.P. 578, page 471, Well 135.
- ** Measurement from W. P. Rowe.

L-29

Midway Service Station

Location and Description: Near southeast corner of $NW_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 18, T.8 N., R.4 E., S.F.3.6 V. Well at tall tank on railroad tie cribbed support south of old highway at bend in road.

Use: Not used.

Reference Point: Bottom of $l_2^{\frac{1}{2}}$ inch pipe opening in plunger pump and 1.8 feet above top of casing.

Elevation of reference point: 1831.4

	: Dist	. R.P. to	:		: Di	st. P.P. to
Date	: wate	r surface	:	Date	: wa	ter surface
	:		:		:	
Apr. 15, 1930	:	49.7	:		:	



L-29 A

Van Doren

Location and Description: Near southwest corner of PV2, Sec. 18, T.8 M., P.4 E., S.B.B.& M. 0.25 miles west of L-29.
Reference Point: Top 36 inch casing at ground.
Elevation of reference point: 1823.8

	Date	* *	R.P. to			Dist. F.P. to water surface
May	11, 1919 29, 1930 23, 1931	*	41.6 41.8 41.7		28, 1932 28, 1932	41.8 41.5

^{*} Measurement from W.S.P. 578, page 471, Well 139.

L-30

Marquiss

Location and Description: In northwest corner of SW2, Sec. 6, T.8 N., R.4 E., S.E.B.& M. 500 feet east of west line of Shafer's Ranch. Reference Point: Top of wood curb at ground level. Elevation of reference point: 1788.6

Date	: Dist. R.P. to : water surface	: Date :	Dist. R.P. to water surface
May 29, 1930 Apr. 23, 1931	: : 11.4 : 10.3	: Apr. 28, 1932 :	10.4

L-30 A

Location and Description: Near center of west line of $SE_4^{\frac{1}{2}}$, Sec. 6, T.8 N., R.4 E., S.B.P.& M. Old windmill northwest of stone house. Reference Point: Under floor boards at ground. Elevation of reference point: 1786.8

Da		: Dist. R.P. to : water surface		Date	Dist. R.P. to water surface
May 29,	, 1930 , 1931	9.5 9.3	:	Apr. 28, 1932	9.7



Anna Mae Monroe

Location and Description: Near northwest corner of SE_c^1 , Sec. 31, T.9 N., R.4 E., S.B.8.8 M.

Use: Not used.

Reference Point: Top of 12 inch casing 2.7 feet above ground.

Elevation of reference point: 1791.6

	Date	•	st. R.P. to ter surface			Date		-	Dist. R.P. to water surface
Oct.	1, 1930 9, 1930 23, 1931	:	15.8 16.2 16.2	:	Apr. June Dec.	23,	1932	:	15.4 15.6 15.6
-	28, 1932	:	15.6	:	Doo.	· ,	2000	:	

L-32

Location and Description: Near southwest corner of SW_Z^2 , Sec. 4, T.8 N., P.4 N., S.E.3.& M. Dug well north of new State Highway in lake bottom and south of Troy Station on railroad.

Use: Not used.

Reference Point: Top of wood curb at upright railroad tie in southwest corner of pit, level with ground.

Elevation of reference point: 1777.2


	Dat	50	_	Dist. R.P. to water surface			Date		-	Dist. R.P. to water surface.
			:		:				:	
Feb.	20,	1930	:	6.0	:	Jan.	28,	1932	:	5.7
May	29,	1930	:	5.7	:	Apr.	28,	1932	:	5.2
Oct.	9,	1930	:	5 .7	:	Dec.	9,	1932	:	5.9
Apr.	22,	1931	:	5.6	:				:	

L-34

Location and Description: In southwest corner of $SW_{4}^{\frac{1}{4}}$, Sec. 10, T.8 N., R.4 E., S.B.F.& M. Forth of Newberry-Hector old highway. Athel windbreak, concrete floor, no house.

Reference point: Top of 10 inch casing 0.8 feet above ground level. Elevation of reference point: 1806.0

	Date		Dist. P.P. to water surface		Da	te	•	Dist. P.P. to water surface
Apr.	15, 1930	:	26.8	:	Apr.	28,	1932:	26.5
Jan.	28, 1932	:	26.8	:	Dec.	9,	1932:	26.9

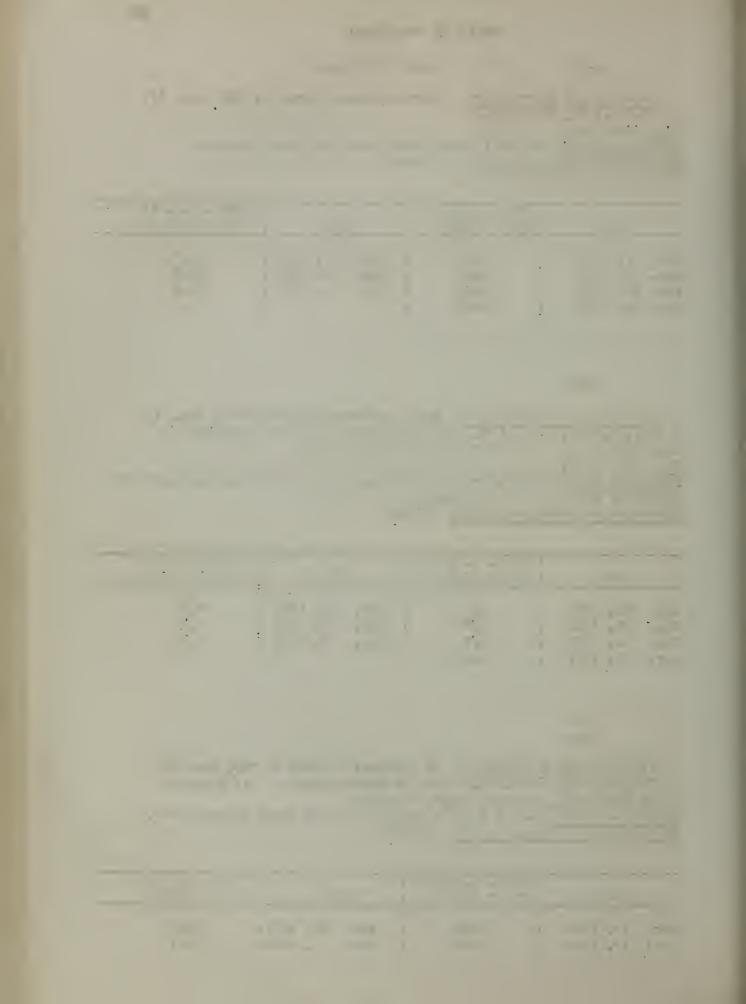

L-35

Geo. E. Ladd

Location and Description: In southeast corner of SE, Sec. 10, T.8 N., R.4 E., S.B.A.M. Near old service station on north side of old road (Ludlow to Newberry).

Use: Domestic.

Reference Point: Top of railroad tie timber 0.5 feet above ground on south side of dug well.

Elevation of reference point: 1831.9

	Date		ist. R.P. to ater surface	-	ת	ate			Dist. R.P. to water surface
Feb.	20, 1930	: :	51.9	:	May	29,	1930	:	51.9

L-36

Location and Description: In $SE_2^{\frac{1}{2}}$ of $SW_4^{\frac{1}{2}}$, Sec. 11, T.8 N., R.4 E., S.B.B.& M. At old Hennessey Desert Palm Ranch.

Use: Not used.

Reference Point: Top of casing under hand pump 0.2 feet above ground. Elevation of reference point: 1822.4

Date		ist. R.P. to vater surface	 D	ate		Dist. P.P. to water surface
3 7 3 0 7 0	:	455.0	May Apr.	•		43.2 43.2

^{*} Measurement from W. P. Rowe.


L-36 A

Location and Description: In $NW_{\frac{1}{4}}$, Sec. 14, T.8 N., R, 4 E., S.B.B.& M., $\frac{1}{4}$ mile south of L-36.

<u>Use:</u> Not used. Reference Point:

Elevation of reference point: 1850.0

	Date	• -	st. R.F. to ter surface	:		Date	9	Pist. R.P. to water curface
γ	19, 1930 22, 1930	:	70.7 70.7		•	,	1930 1932	70.7 Filled

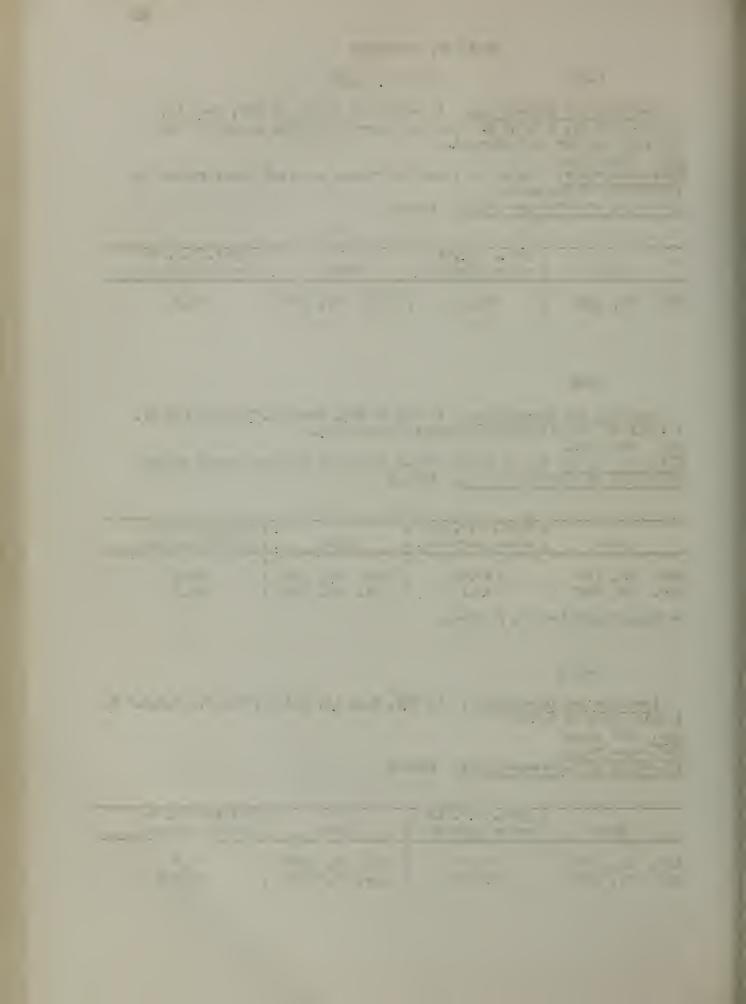

L - 37

Location and Description: Near center of SW2, Sec. 12, T.8 N., R.4 E., S. 3.8 N. On south side of State Highway opposite l'ojave Water Camp Service Station.

Reference Point: Top of concrete cover of pit at opening, level with ground.

Elevation of reference point: 1810.1

Date		Dist. R.P. to water surface		Date		Dist. R.P. to water surface
20, 1930 28, 1932	:	32.6 32.7	Apr. Dec.			32.3 32.6

L-42

G. Linquenfelder.

Location and Description: Near center of SW2, Sec. 15, T.9 N., R.1 E., S.B.B.& M. North of Van Dyke's house in flat.

Reference Point: Top concrete slab at ground surface, west side of well, 5.9 feet above 12 inch casing in pit.

Elevation of reference point: 1963.7

Date			: Dist. R.P. to : water surface								Dist. R.P. to water surface
Aug.	14	1925	:	*	69.2	:	Apr.	22	1931	:	77.8
_		1926					Dec.				79.1
Feb.	16,	1927	:	*	74.2	:	Feb.	16,	1932	:	79.2
Oct.	10,	1927	:	*	69.5	:	Feb.	27,	1932	:	77.5
Oct.	21,	1928	:	*	70.7	:	Mar.	24,	1932	:	73.6
Feb.	1,	1930	:		74.4	:	Jan.	23,	1934	:	75.8
May	23,	1930	:		75.2	:				:	

^{*} Measurement from W. P. Rowe.



L-43

Location and Description: Mear southwest corner of NW_2^1 , Sec. 13, T.9 N., R.1 E., S.E.B.& M. North well of two, 300 feet apart. Ties crossed and bolted 5 feet east of well.

Use: Not used.

Reference Point: Top of 12 inch casing 1.2 feet above ground. Elevation of reference point: 1949.9

	Date		Dist. R.P. to water surface		Date			Dist. P.P. to water surface
		:		:			:	
Sept.	14, 1925	:	* 61.5	:	Dec. 7, 1	1930	:	71.2
Mar.	7, 1926	:	* 63.7	:	Mar. 17, 1	L932	:	69.0
Oct.	10, 1927	:	* 61.3	:	Mar. 24, 1	1932	:	68.4
Oct.	6, 1928	:	* 64.7	:	Apr. 21, 1	1932	:	66 .7
May	22,11930	:	68.3	:	Jan. 11, 1	L933	:	67.0
Jan.	22, 1930	:	69.7	:	Jan. 23, 1	1934	:	70.2

^{*} Measurement from W. P. Rowe.

L-43 A

Location and Description: Near southwest corner of NW2, Sec. 13, T.9 N., R.1 E., S.B.B.& M. 300 feet south of L-43.

Use: Not used.

Reference Point: Top of 12 inch casing 0.7 feet above ground.

Elevation of reference point: 1950.3

	Date		Dist. R.P. to water surface		Date		Dist. P.P. to water surface
		:		;		:	
Sept.	14, 1925	:	* 63. 6	:	Mar. 17, 1932	:	69.7
Mar.	7, 1926	:	* 64.2	:	Mar. 24, 1932	:	69.2
Oct.	10, 1927	:	* 61.3	:	Apr. 21, 1932	:	67.5
May	22, 1930	:	68.7	:	Jan. 11, 1933	:	68.4
Jan.	22, 1930	:	70.1		Jan. 23, 1934		70. dry
Dec.	7, 1930			:	,	:	· ·

^{*} Measurement from W. P. Rowe.

STATE OF THE PERSON AND ADDRESS OF THE PERSO

	322

L-45

Location and Description: Near southwest corner of NW2, Sec. 3, T.9 N., R.1 E., S.B.B.& M. Turbine pump in open, east of wood engine house. Woven wire fence around field north of highway. Just west of old railroad to Calico.

Use: Not used.

Reference Point: Top of pump base.

Elevation of reference point:

Date	: Dist. R.P. to : water surface	Date	Dist. R.P. to water surface
16, 1919 24. 1930	: * 73.3 : 76.5	Apr. 27, 1932 Apr. 13, 1934	

* Measurement from W.S.P. 578, page 465, Well 35.

L-47

Location and Description: Near northwest corner of NV_{4}^{1} , Sec. 12, T.9 N., R.1 E., S.B.& M. Plant east of house at four post wood derrick. Galvanized iron tank on crib support.

Use: Irrigation and domestic.

Reference Point: Bottom of iron pump base on 7" x 7" timber, 0.6 feet above ground.

Elevation of reference point:

	Date		ist. R.P. to iter surface			•	Dist. R.P. to water surface
•	23, 1930 4, 1932	: :	46.5 45.6	:	Mar. 30, 1934	:	48.8

L-48

Tom Williams

Location and Description: Southwest corner of $SW_{4}^{\frac{1}{2}}$, Sec. 31, T.10 N., R.2 E., S.B.B.& M. 0.5 mile northeast of Yermo.

Use: Domestic.

Reference Point: Top of wood curb at ground level.

Elevation of reference point: 1924.9

	Date		st. P.P. to ter surface			Date	_	Dist. R.P. to water surface
Nov.	11, 1919	:	* 45.5	:	May	24, 1930	:	43.7

^{*} Measurement from W.S.P. 578, page 464, Well 6, corrected for change in reference pointl

the same of the same of the same of the same

L-49

Location and Description: In southeast corner of $SW_4^{\frac{1}{2}}$. Sec. 32, T.10 N., R.2 E., S.B.B.& M. Old well and pumping plant at head of Harvard Ditch or Yermo Mutual Water Company.

Use: Not used.

Reference Point: Top of concrete base of turbine pump, 0.2 feet above ground.

Elevation of reference point: 1905.7

	D	ate			F.P. to surface			Date			Dist. R.D. to water surface
Nov.	4,	1919	:	*	23.0	:	May	23,	1930	:	29.2
Jan.	22,	1920		*	23.0	:	Jan.	22,	1931	:	30.6
May	17,	1922	:	**	19.1	:	Sept.	24,	1931	:	31.8
Sept.	11,	1922	:	**	19.6	:	Apr.	27,	1932	:	29.6
Dec.	15,	1922	:	**	18.5	:	Feb.	22,	1933	:	30.0
June	5,	1924	:	**	21.5	:	Mar.	30,	1934	:	31.4
Dec.	5,	1929	:		28.9	:				:	

^{*} Measurement from W.S.P. 578, page 490, Well 9.

L-50

Location and Description: Near northwest corner of $NW_{\frac{1}{4}}$, Sec. 4, T.9 N., R.2 E., S.B.B.& M. Water trough 6 feet south of well. Use: Not used. Reference point: Top of 16 inch casing 0.1 feet above ground. Elevation of reference point:

	Dat	te		ist. R.P. to ater surface			Drte		-	Dist. R.P. to water surface
May	•		:	21.1		Apr.	•			21.5
Jan. Sept.	•		:	22,0 23,0	:	Mar.	30,	1934	:	23,3

^{**} Measurement from W. P. Rowe.

- 1000

						-	• •
			-				
							500
· ·					1		
							. L
•	•						
5,000					×		
				10,17111	0		
•				•			-
				•			

McCormick

Location and Description: Near center of NE_{\pm}^{1} , Sec. 3, T.9 N., R.2 E., S.B.& M. East of house and mill near steam boiler.

Use: Domestic.

Reference Point: Top of 12 inch casing at hand pump. 0.9 feet above ground.

Elevation of reference point: 1844.0

			:	Dist. R.P. to	:				:	Dist. R.P. to
	Da	te	: 1	water surface	:		Date		:	water surface
		1010	:		:	_		1000	:	30.5
Nov.	l,	1919	:	* 13.3	:	Jan.	21,	1932	:	19,5
May	17,	1922	:	** 5.5	:	Apr.	27,	1932	:	16.7
Dec.	15,	1922	:	** 6.6	1:	Jan.	11,	1933	:	18.6
May	23,	1930	:	16.5		Jan.	23,	1934	:	20.5
Jan.	22,	1931	:	19.0	:				:	
Sept.	24,	1931	:	20.2	:				:	

^{*} Measurement from W.S.P. 578, page 467, Well 55a, corrected for change in reference point.

L-51 A

Location and Description: Near center of NE¹/₄, Sec. 3, T.9 N., R.2 E., S.B.B.& M. A short distance northwest of L-51.

Reference Point: Top 12 inch casing 0.8 feet above ground.

Elevation of reference point: 1846.2

Date	: Dist. R.P. to : water surface		: Dist. R.P. to : water surface
•	: 21.3 : 23.4 : a 23.6	: Apr. 27, 1932 : Jan. 11, 1933 : Jan. 23, 1934	22.1

a - Pumping slowly.

L-52

Fisher

Location and Description: In nerthwest corner of $SE_6^{\frac{1}{6}}$, Sec. 3, T.9 N., R.2 E., S.B.B.& M. 100 feet northwest of house. Old three leg steel tower, no mill.

Use: Domestic

Reference Point: Top of steel cover on 10 inch casing, 1.3 feet above ground.

Elevation of reference point: 1859.4

	Date		Dist. R.P. to water surface		Date			Dist. R.P. to water surface
Feb.	20, 1930	:	5.5	:	Sept. 24, 1	931	:	7.9
May	23, 1930	:	6.3	:	Apr. 27, 1	932	:	6.2
Jan.	22, 1931	:	5.9	:	Jan. 11, 1	.933	:	6.4

^{**} Measurement from W. P. Rowe.

AND THE RESERVE OF THE PARTY OF 1 4 3 THE REAL PROPERTY. Sec. 1 THE RESIDENCE OF THE PARTY OF T - FT | LT | . .

L-53

Location and Description: Near southwest corner of SW2. Sec. 2. T.9 N., R.2 E., S.B.B.& M. In clearing on bench east of trees at Kouns. Reference Point: Top 12 inch battered casing inside, and 1.9 feet below, old galvanized iron perforated casing and 0.5 feet below average ground. Elevation of reference point: 1857.6

	Dat	ie .			R.P. t r surfac		ľ	ate			Dist. R.P. to water surface	
Oct.	•	1925	•	*			Jan.	-			9,8 12,2	
Mar.	6,	1927	:	*		:	Feb.	26,	1932	:	11.7	
	23,	1930	:		9.9	:	Apr. Jan. Jan.	11,	1933	:	10.5 10.8 11.1	

^{*} Measurement from W. P. Rowe.

L-54

Location and Description: Near center of SW_{4}^{1} , Sec. 34, T.10 N., R.2 E., S.B.B.& M. Old well just west of stand for water tank, south of Kouns - Newberry road.

Reference Point: Too of 6" x 6" hewn timber on south side of well at ground level. Casing is 1.2 feet below reference point.

Elevation of reference p	coint:	1876.	2
--------------------------	--------	-------	---

	Date		Dist. R.P. to water surface		Date		Dist. R.P. to water surface
Marr	11, 1919	:	# FO C	:	20mt 24 3	073	F9 0
	•		* 47.4		Sept. 24, 1 Apr. 27, 1		
•	15, 1922				Mar. 30, 1		60.4
May	23, 1930	:	56.1	:		:	

^{*} Measurement from W.S.P. 578, page 466, Well 52, corrected for change in reference point.

^{**} Measurement from W. P. Rowe.

				17710000		
-						
	-	200				
			٠	1.1	484.7	
				1. 1 1	100	
•						
			٠,			
			1		00 7 . 7	0

- 1 - 1 - M			00-41-	 ~
		1,03.16		

L-56

Location and Description: In southwest corner of $SW_{4}^{\frac{1}{2}}$, Sec. 15, T.10 K., R.3 E., S.B.B.& M., at junction of highway and road from Harvard to Coyote Lake.

Reference Point: Top of 2" x 12" curb on east side, 0.2 feet above average ground.

Elevation of reference point: 1816.9

Date		R.P. to		Date		Dist. P.P. to water surface
14, 1919 24, 1930	: : 3	77.8	:	May 11, 1932	:	77. dry

* Measurement from W.S.P. 578, page 464, Well 13, corrected for change in reference point.

L-58

Location and Description: Near center of south line of $NW_{2}^{\frac{1}{2}}$, Sec. 4, T.10 N., R.3 E., S.B.R.& M. Dug well east of Harvard to Coyote Lake road. Use: Not used.

Reference Point: Top of 4" x 4" in southeast corner of pit at average ground level.

Elevation of reference point: 1792.4

I	ate		st. R.P. to ter surface			Date		R.P. to surface
0	, 1930 , 1932	:	54.0 54.0	:	Apr.	13,	1934 :	53.9

L-59

Location and Description: Near center of NW_{4}^{1} , Sec. 32, T.11 N., R.3 E., S.B.B.& M. Cased well with reilroad tie for plug, east of Harvard-Coyote Lake road.

Reference Point: Top of 10 inch casing 1.0 foot above ground. Elevation of reference point: 1786.2

	Date		Dist. R.P. to water surface			: Dist. R.P. to : water surface
May	28, 1930	:	48.2	:	Apr. 13, 1934	: 48.1
May	11, 1932	:	48.1	:		:

10-1

100

.

L-60

Location and Description: Near center of SE_a^1 , Sec. 30, T.11 N., R.3 E., S.B.B.& M. Old wooden windmill tower with steel mill near trough, west of road to Coyote Lake.

Use: Not used.

Reference Point: Top of 10 inch casing 1.9 feet above ground.

Elevation of reference point: 1782.5

	Date		ist. R.P. to			Date	9		Dist. R.P. to water surface
May	28, 1930	:	47.2	:	May	11,	1932	:	47.2

L-62

Location and Description: In southwest corner of Sec. 7, T.9 N., R.2 E., S.B.B.& M.

Use: Not used.

Reference Point: Top of iron casing.

Elevation of reference point:

	Dat	te			R.P. to surface			Date			Dist. R.P. to water surface
Oct.	24	1010	:	*	51 <i>(</i>	:	Feb.	20	1020	:	56. dry
Jan.				*	• -		Mar.	•			56. dry
Oct.			:	**	52.2		Mar.				55.5
Mar.	7,	1926	*	**	53.2	:	Apr.	21,	1932	:	54.6
Oct.	6,	1928	:	**	54.4	:				:	

- * Measurement: from W.S.P. 578, page 490, Well 57.
- ** Measurement from W. P. Rowe.

L-63

Location and Description: Near center of Sec. 18, T.9 N., R.2 E., S.B.B.& M. Corner of Soap Ranch.

Reference Point: Top of 12 inch casing 1.0 foot above ground.

Elevation of reference point: 1934.7

	Da.	te	-		R.P. t	-		Date			Dist. P.P. to water surface
June	13.	1924	:	*	48.0	:	Jan.	22.	1.931	:	58.2
Sept.				*			Mar.				58.5
Mar.	15,	1926	:	*	50.3	:	Apr.	21,	1932	:	57.4
Mar.	3,	1927	:	*	52.5	:	Nov.	2,	1932	:	57.5
Sept.	12,	1928	:	*	54.1	:	Jan.	11,	1933	:	57.8
Feb.	28,	1930	:		56.7	:	Jan.	23,	1934	:	59.2
May	8,	1930	:		57.1	:				:	

^{*} Measurement from W. P. Rowe.

. 0 - ... - 7 4 1,000

L-64

Annie Escholtz

Location and Description: Near center of SE1/4, Sec. 8, T.9 N., R.2 E., S.B.B.& M.

Use: Domestic.

Reference Point: Top of 2" x 8" cover clamp on concrete foundation, 0.2

feet above ground.

Elevation of reference point: 1915.6

	Date 28, 1919 t. 1, 1925	te		: Dist. R.P. to : water surface								Dist. R.P. to water surface		
Oct.	28.	1919	:	*	35.3	:	Sept.	24.	1931	:		43.3		
	-		:	**	37.0		Mar.					41.8		
Sept.	12,	1928	:	**	39.2	:	Apr.	21,	1932	:	a	41.5		
Peb.	28,	1930	:		41.1	:	Jan.	11,	1933	:	Ъ	43.6		
Jan.	22,	1931	:		43.8	:				:				

- * Measurement from W.S.P. 578, page 467, Well 64a.
- a Pumping nearby.
- b Windmill pumping.
- ** Measurement from W. P. Rowe.

L-65

Bowles

Location and Description: In southwest corner of SW_{4}^{1} , Sec. 10, T.9 N., R.2 E., S.B.8 M.

Use: Not used.

Reference Point: Top of 2" x 12" wood curb at northwest corner of pit at ground level.

Elevation of reference point: 1897.3

	Date	• -	P.P. to : surface :		Date		Dist. R.P. to water surface
May	8, 1930	•		Jan. Aug.			28.9 29. Mud

^{*} Measurement from W.S.P. 578, page 467, Well 65.

Allert Co.

106-100

1000			
	三世三	1 22 - 1	

THE RESIDENCE OF THE PERSON NAMED IN

100

and mile

on let it and the beauty method to problem the problem of the prob

The second secon

Control of the latest the same of

A DISTRICT OF STREET STREET

L-66

Hunter

Location and Description: In southwest corner of $SW_2^{\frac{1}{2}}$, Sec. 12, T.9 N., R.2 E., S.B.& M. North of house.

Use: Domestic.

Reference Point: Top of wood curb at ground level and 1.7 feet above top of 12 inch casing.

Elevation of reference point: 1867.3

	Date		R.P. to	D	ate			Dist. R.P. to water surface
	29, 1919	: : *		Aug. Feb.	•			14.9 14.6
June	13, 1924	**		Apr.	- 1			13.4
	•	:		July Jan.				14.8 14.8
		:		0 cc11 •		1000	:	2,40

^{*} Measurement from W.S.P. 578, page 468, Well 79a.

L-67

Hunter

Location and Description: In southwest corner of $SW_{4}^{\frac{1}{2}}$, Sec. 12, T.9 N., R.2 E., S.B.B.& M. Old pumping plant southeast of house.

Use: Not used.

Reference Point: Top of 10 inch casing 1.63 feet above 12 inch casing at ground level.

Elevation of reference point: 1873.2

				Dis	E. P.P.	to:				:	Dist. R.P. to
	Da:	te			er surf		D	ate			water surface
			:	-		:				:	
Oct.	29,	1919	:	*	5.9	:	Jan.	22,	1931	:	8.1
June	13,	1924	:	**	3.6	:	Aug.	26,	1931	:	8.8
Sept.	13,	1925	:	**	5.6	:	Feb.	26,	1932	:	8.6
Mar.	15,	1926	:	**	5.5	:	Apr.	27,	1932	:	8.2
Mar.	3,	1927	:	**	5.3	:	July	13,	1932	:	8.6
Feb.	28,	1930	:		7.3		Jan.				8.4
May	22,	1930	:		7.6	:				:	

^{*} Measurement from W.S.P. 578, page 468, Well 79, corrected for change in reference point.

^{**} Measurement from W. P. Rowe.

^{**} Measurement from W. P. Rowe.



L-68

Scobel & Haimut

Location and Description: In southwest corner of SW2, Sec. 14, T.9 N., R.2 E., S.B.B.& M.

Use: Domestic.

Reference Point: Top of lower board of windmill at ground level. Elevation of reference point: 1888.5

	Date			.P. to urface	:		Date	e		Dist. water		
Oct.	29, 1919	:	* 26	•5	:	May	23,	1922	:	**	22.1	

- * Measurement from W.S.P. 578, page 467, Well 73.
- ** Measurement from W. P. Rowe.

L-68 A

Scobel & Haimut

Location and Description: In $SW_{\frac{1}{4}}^{1}$ Sec. 14, T.9 N., R.2 E., S.B.B.& M. Northeast of L-68.

Reference Point: Top of casing at ground. Elevation of reference point: 1886.0

	Date	3		Dist. R.P. to water surface			ate			st. R.P. to ter surface
			:		:				:	
Nov.	10,	1925	:	*15.8	:	Aug.	26,	1931	:	a 22.8
Mar.	7,	1927	:	*16.6	:	Jan.	28.	1932	:	20.2
Sept.	12,	1928	:	* 20.3	:	Mar.	17.	1932	:	a 22.6
4		1930			:	Jan.	11.	1933	:	19.8
Oct.						Feb.				20.8

^{*} Measurement from W. P. Rowe.

L-68 B

Scobel & Haimut

Location and Description: In SW¹/₄, Sec. 14, T.9 N., R.2 E., S.E.B.& M. East of L-68.

Use: Irrigation

Reference Point: Top of railroad tie on ground, southeast corner of catch basin.

Elevation of reference point: 1886.8

	Date		st. R.P. to ter surface	•	Date	-	Dist. R.P. to water surface
		:		:		:	
Oct.	9, 1930	:	17.9	:		:	

a - Pumping nearby.

L-68 C

Scobel & Haimut

Location and Description: In southwest corner of SW4, Sec. 14, T.9 N., R.2 E., S.P.B.& M. Southeast of L-68
Reference Point: Top of casing at ground.
Elevation of reference point: 1883.2

	Da:	te	-		R.P. to	-		Date				R.P. to
			:		and the second s	:				:		
June	13,	1924	:	3/40	14.0	:	Oct.	9,	1930	:		19.5
Nov.	10,	1925	:	*	15.8	:	Jan.	22,	1931	:		18.8
Mar.	15,	1926	:	*	15.8	:	Aug.	26,	1931	:	a	19.3
Mar.	7,	1927	:	*	16.3	:	Jan.	28,	1932	:		19.4
Sept.	12,	1928	:	*	17.2	:	Mar.	17,	1932	:	a	19.6
Feb.	28,	1930	:		18.1	:	Jan.	11,	1933	:		19.7
					-							

^{*} Measurement from W. P. Rowe.

L-69

McNutt

Location and Description: In southwest corner of SE_7^1 , Sec. 14, T.9 N., R.2 E., S.B.B.& M.

Reference Point: Top of 36 inch casing 1.7 feet above ground level.

Elevation of reference point: 1879.2

	Dat	ce		-	P.P.	-		Date	9	-	Dist. R.P. to water surface
Oct.	20	1010	:	*	1 4 0	:	Jan.	22	1071	:	17.7
		1922					Aug.				18.1
		1530					Jan.				18.3
May	22,	1930	:		17.2	:	Apr.	27,	1932	:	18.4
Oct.	9,	1930	:		17.6	:				:	

^{*} Measurement from W.S.P. 578, page 467, Well 74.

a - Pumping nearby.

^{**} Measurement from W. P. Rowe.



L-70

Pitman

Location and Description: Near center of south line of NE¹/₄, Sec. 11, T.9 N., R.2 E., S.B.R.& M.

Reference Point: Top of concrete slab with 12 inch square opening over

Elevation of reference point: 1865.0

	Date		Dist. R.P. to water surface		Da	.te			Dist. P.P. to water surface
	•	:		:				:	
Oct.	30, 1919	:	* Flowing	:	Jan.	22,	1931	:	₹.8
May	1922	:	** Flowing	:	Aug.	26,	1931	:	3.8
Sept.	13, 1925	:	** Flowing	:	Jan.	21,	1932	:	4.0
Mar.	6, 1927	:	** Flowing	:	Feb.	26,	1932	:	4.0
May	23, 1930	:	3.4	:	Apr.	27,	1932	:	3 .7

^{*} Measurement from W.S.P. 578, page 468, Well 78.

L-70 A

Pitman

Location and Description: In NE¹/₄, Sec. 11, T.9 N., R.2 E., S.B.B.& M., about 1000 feet west of L-70.

Reference Point: Top of 36 inch casing 1.5 feet above average ground.

Elevation of reference point: 1868.3

	Date		st. R.P. to	-	Date	: Dist. R.P. : water surfa	
		:		:		:	
May	23, 1930	:	12.5	:		:	

L-71


Newbrough

Location and Description: Near center of north line of NW2, Sec. 11, T.9 N., R.2 F., S.B.B.& M. Windlass on north side of windmill tower. Reference Point: Top of 3 inch circular cement curb, 0.2 feet above ground level. Smaller casing in bottom. Elevation of reference point: 1884.7

Date	: Dist. R.P. to : water surface		: Dist. F.P. to : water surf:ce
May 21, 1922 June 13, 1924 Sept. 13, 1925 Mar. 6, 1927 Oct. 6. 1928		: May 23, 1930 : Jan. 22, 1931 : Aug. 26, 1931 : Feb. 26, 1932 : Apr. 27, 1952	: 16.1 : 18.3 : 17.0

^{*} Measurement from W. P. Rowe.

^{**} Measurement from W. P. Rowe.

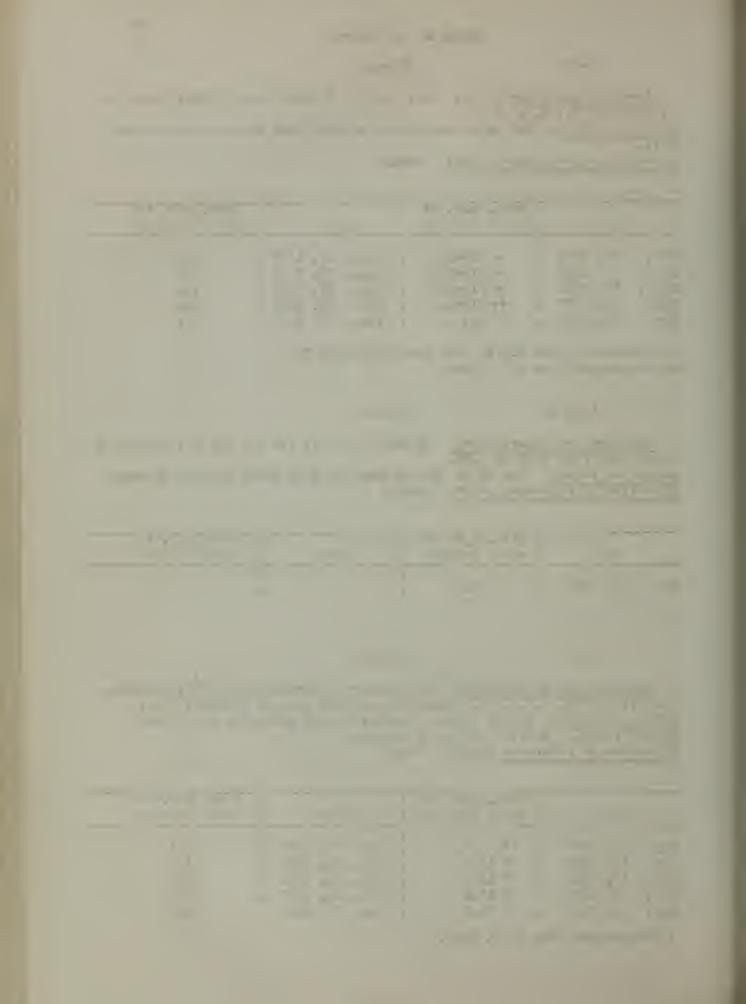

L-72

Callender

Location and Description: In southwest corner of SW2, Sec. 7, T.9 N., R.3 E., S.B.B.& M. In open country east of sand hills and mesquite. Reference Point: Top of 6 inch T on well 2.95 feet above top of wood curb at ground level.

Elevation of reference point: 1861.2

	Date	: Dist. R.P. to : water surface	•	Dist. R.P. to water surface
Oct. May Sept. Feb. May Jan.	20, 2000	** 49.5 : 51.2 : 51.3	: Aug. 26, 1931 : Feb. 26, 1932 : Apr. 27, 1932 : July 13, 1932 : Feb. 15, 1933 : Feb. 14, 1934	52.6 52.4 52.6 53.0

^{*} Measurement from W.S.P. 578, page 468, Well 80, corrected for change in reference point.

L-73

Dan Gould

Location and Description: In northeast corner of $NE_4^{\frac{1}{4}}$, Sec. 28, T.9 N., R.3 E., S.B.B.& M.

Use: Domestic.

Reference Point: Top of 2 inch wood cover over 36 inch iron casing and 0.32 feet above casing at ground level. Elevation of reference point: 1830.0

Date	: Dist. P.P. to : water surface :		Dist. R.P. to water surface
May 8, 1930	35.7	: Jan. 28, 1932 :	33.5
Aug. 19, 1931	33.4	: Apr. 28, 1932 :	34.2

^{**} Measurement from W. P. Rowe.



L-74

Newberry School

Location and Description: In northwest corner of Sec. 22, T. 9 N., R. 3 E., S.B.B.& M.

Use: Domestic.

Reference Point: Top of upper set of three wood clamps which is 0.77 feet above casing at ground level.

Elevation of reference point: 1833.0

Γ	ate		R.P. to			Date		Dist. R.P. to water surface
Sept. 4 May 8 Aug. 19	, 1930	: *	37.4 37.5 37.7	:	Mar.	28, 1 23, 1 28, 1	932 :	37.8 37.8 38.1

* Measurement from W.S.P. 578, page 469, Well 104, corrected for change in reference point.

L-75

Harlow

Location and Description: In southwest corner of SW_4^1 , Sec. 10, T.9 N., R.3 E., S.B.B.& M. Engine house below ground with steps down belt tunnel to pump chamber.

Use: Irrigation.

Reference Point: Top of 12 inch concrete pipe 1.0 foot above ground. Elevation of reference point: 1825.4

	Date	: Dist. R.P. to : water surface	:	Date		Dist. R.P. to water surface
May Mar.	22, 1922 1, 1930	: * 32.2 : 32.8	:	Aug. 26,	1931:	34. dry

* Measurement from W. P. Rowe.

L-76

Bozarth

Location and Description: Near center of west line of $NW_{4}^{\frac{1}{4}}$, Sec. 10, T.9 N., R.3 E., S.B.B.& M. Tall derrick tower on well.

Use: Domestic.

Reference Point: Top of suction column of pump inside casing and 2.0 feet below average ground.

Elevation of reference point: 1823.9

	Date		ist. K.P. to ater surface			Date			Dist. R.P. to water surface
Mar. May	7, 1930 8, 1930	:	32.0	:	Jan. May Feb. Feb.	19, 15,	1933	:	32.7 32.6 33.0 33.2

^{*} Measurement from W. P. Rowe.

Section 6 III

Section Section 1

1994

The state of the s

1740

THE RESERVE OF THE PARTY OF THE

L-76 A

Bozarth

Location and Description: Near center of west line of NW_4^1 , Sec. 10, T.9 N., R.3 E., S.B.B.& M. South of L-76 Reference Point: Top 2" x 4" at ground level on north side of curb. Elevation of reference point:

	Date		Dist. R.P. to water surface			Date		: Dist. R.P. to : water surface
Nov.	19. 1919	:	* 32.0	:	Jan.	28.	1932	32.0
Mar.	7, 1930	:	31.2		May	•		
May	8, 1930	:	31.2	:	Feb.	15,	1933	: 32.2
Sept.	24, 1931	:	32.4	:				:

^{*} Measurement from W.S.P. 578, page 469, Well 94.

L-77

Location and Description: Northwest corner of Sec. 3, T.9 N., R.3 E., S.B.B.& M.

Use: Not used.

Reference Point: Top of 12 inch casing at ground level, east of old engine base.

Elevation of reference point: 1823.2

Date	: Dist. P.P. to : water surface		: Dist. R.P. to : water surface
Mar. 7, 1926 Mar. 1, 1930	:	: Jan. 28, 1932 : Apr. 28, 1932 : Feb. 15, 1933 : Feb. 14, 1934	42.0 42.3

^{*} Measurement from W.S.P. 578, page 469, Well 90.

L-78

Henderson


Location and Description: South of center of NW_4^1 , Sec. 34, T.10 N., R.3 E., S.B.B.& M.
Reference Point: Top of 14 inch casing.

Elevation of reference point: 1774.9

Date	Dist. R.P. to water surface		Date	-	Dist. P.P. to water surface
•	* 12.0	Apr.	1		
1, 1930 24, 1931		Feb.	,		8.8 8.9

^{*} Measurement from W.S.P. 578, page 465, Well 24.

^{**} Measurement from W. P. Rowe.

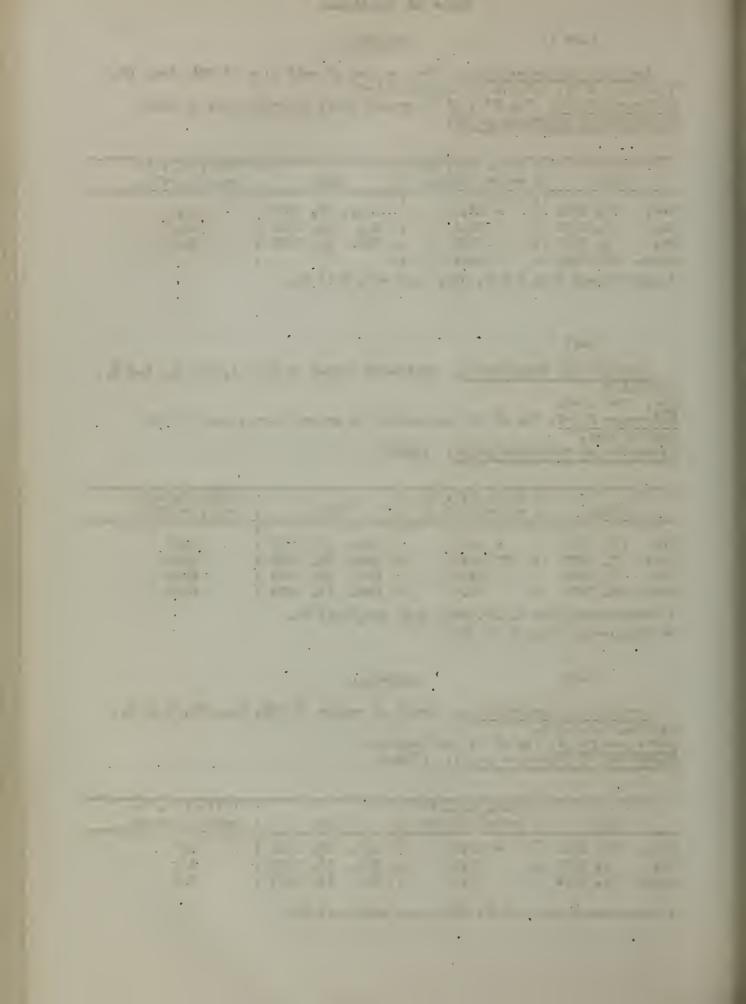

L-78 A

Henderson

Location and Description: South of center of $NN_{\frac{1}{4}}$, Sec. 34, T.10 N., R.3 E., S.B.8& M., near round corral.

Reference Point: Top 14 inch casing 0.5 feet above ground.

Elevation of reference point: 1786.3

	Date		Dist. R.P. to water surface	:	D	ate			Dist. R.P. to water surface
Mar.	1, 1930	:	4.5	:	Apr.	28,	1932	:	3.6

L-79

Location and Description: Near center of west line of NW_{4}^{1} , Sec. 4, T.9 N., R.3 E., S.B.B.& M. South of road along bluff from Camp Cody to Forks of Road.

Use: Not used.

Reference Point: Top of 12 inch casing 1.8 feet above ground. Elevation of reference point:

	Date	: Dist. R.P. t : water surface	•		: Dist. R.P. to. : water surface
Mar.	7, 1925 15, 1926 8, 1930	* 40.4 * 39.6 40.7	: Jan.	24, 1931 28, 1932 28, 1932	: 41.6

* Measurement from W. P. Rowe.

L-80

Location and Description: Near center of south line of SE¹, Sec. 10, T.9 N., R.3 E., S.B.B.& M. 15 feet north of nine sided concrete reservoir.

Use: Not used.

Reference Point: Top of 12 inch casing at ground level. Elevation of reference point: 1818.8

Dai	Dist. R.P. to water surface		Date		Dist. R.P. to water surface
May 16, Aug. 25,	28 . 9 29.2	: : Ap	r. 28, 1932	:	29.6

SECTION OF THE PARTY.

Location and Description: Near northwest corner of NE¹_z, Sec. 14, T.9 N., R.3 E., S.B.B.& M. Dug well 6 feet in diameter just south of circular reservoir. Concrete pump base 20 feet west.

Reference Point: Top railroad tie on north side of pit at ground level.

Elevation of reference point: 1812.4

	Date		Dist. R.P. to water surface		Date	:	Dist. R.P. to water surface
May	16, 1930	:	28.7	:	May 19, 1932	:	29.1
Aug.	26, 1931	:	29.0	:		:	

L-82

Major

Location and Description: In southwest corner $SE_{\frac{1}{4}}$, Sec. 7, T.9 N., R.4 E., S.B.B.& M. North of reservoir.

Use: Not used.

Reference Point: Top 4" x 4" wood clamp 0.4 feet above ground. Elevation of reference point: 1798.2

	Date	: Dist. R.P. t : water surfac		Date		Dist. R.P. to water surface
Nov.	20, 1919	: * 25.3	:	Aug. 26, 1931	:	26.0
May	16, 1930	: 24.9	:	May 19, 1932	:	25.0
·		om W.S.P. 578,		· ·	•	

L-82 A

E. F. Dodson

Location and Description: In southwest corner of $SW_{\frac{1}{4}}$, Sec. 7, T.9 N., R.4 E., S.B.8 M.

Reference Point: 3 notches in southwest corner of pit at ground.

Elevation of reference point: 1801.6

Date		Dist. R.P. to water surface		Date	•	Dist. R.P. to water surface
Nov. 20, 1919 May 16, 1930	Ť		:	May 19, 1932	:	21.6

^{*} Measurement from W.S.P. 578, page 470, Well 126.

June 1 De 1 NO

100

And the section of the section is a

L-83

H. G. Tienken

Location and Description: Near southwest corner of NW, Sec. 18, T.9 N., R.4 E., S.B.B.& N.

Use: Not used.

Reference Point: Top of stringer on north side of well at ground level. Elevation of reference point: 1801.4

	Date	: Dist. R. ?. to : water surface		: Dist. R.P. to : water surface
May	20, 1919 23, 1922 28, 1930	: * 24.6 : ** 24.4 : 24.2	: May 16, 1930 : Aug. 25, 1931 : May 18, 1932	: 26.2

^{*} Measurement from W.S.P. 578, page 470, Well 128.

L-83 A

Location and Description: Near southwest corner of NW4, Sec. 18, T.9 N., R.4 E., S.B.B.& N. Old windmill.

Reference Point: Top of cement curb at ground and 217 feet above top 12 inch casing.

Elevation of reference point: 1801.5

Date		ist. R.P. to		Date	•	Dist. F.P. to water surface
	: :	24.2 24.4	Aug. May	-		27,3 24.6

L-84

Location and Description: Near center north line of Str., Sec. 8, T.9 N., K.4 F., S.B.B.& F. North of road and adobe house on road up Black Pass through Cady Lountains, and northeast of adobe house in trees. Use: Not used.

Reference Point: Top of 1 inch wood cover 0.4 feet above ground. Elevation of reference point: 1793.4

Date		st. P.P. to ter surface			Date		: Dist. R.P. to : water surface
•	:	21.8	:	May	19, 1	.932	: 21.6
16, 1930 26, 1931	:	21.7 22.7	:	Feb.	15, 1	.933	: 21.8 :

^{**} Measurement from V. P. Rowe.

L-85

Location and Description: Near certer of north line of SE_4^1 , Sec. 8, T.9 N., R.4 E., S.F.P.& N.

Use: Not used.

Reference Point: Top of 1 inch board cover on well 1.7 feet above cover at ground level.

Elevation of reference point: 1787.1

Date		t. R.P. to er surface		Date		Dist. water		
28, 1930 16, 1930	:	16.7 16.6	Aug. May				17.5 16.4	dry

L-87

C. F. Slicton

Location and Description: Near center of north line of $SW_{\overline{c}}^{1}$, Sec. 35, T.10 N., R.3 E., S.B.B.& M. On south side of road, 100 feet south of adobe with fancy fence.

Reference Point: Top of 6 inch casing inside 12 inch casing 1.2 feet above ground.

Elevation of reference point: 1806.0

Date		t. R.P. to er surface])ate		Dist. R.P. to water surface
23, 1922 8, 1930	: :	* 43.2 43.4	Sept.			43.9 43.6

^{*} Measurement from W. P. Rowe.

L-88

J. T. Carnall

Location and Description: In southeast corner of $NE_{c}^{\frac{1}{2}}$, Sec. 35, T.10 N., R.3 E., S.B.B.& M. North of round oil lined reservoir.

Use: Not used.

Reference Point: Top of 2 inch curb on east side at ground level. Elevation of reference point: 1791.5

	Date	: Dist. R.P. to : water surface		: Pist. P.P. to : water surface
Nov.	•	: * 33.0 : ** 32.1	: Sept. 23, 1931 : May 19, 1932	
	•	: 32.4	:	:

^{*} Measurement from W.S.P. 578, page 465, Well 26.

^{**} Measurement from W. P. Rowe.

. . . . 2017

L-89

W. E. Schildt

Location and Description: Near southeast corner of NW1, Sec. 30, T.10 N., R.4 E., S.B.B.& M. Reference Point: Top 2 inch plank cover on dug well at ground level.

Elevation of reference point: 1739.4

	Date		Dist. R.P. to water surface		Date	e	-	Dist. R.P. to water surface
Nov	21, 1919	:	* 19.5	:	May 8,	1930	:	18.5 dry
	21, 1922				May 19,			dry

- * Measurement from W.S.P. 578, page 465, Well 28.
- ** Measurement from W. P. Rowe.

L-90

Purcell

Location and Description: Near center of west line of NW_{4}^{1} , Sec. 32, T.10 N., R.4 E., S.B.R.& M. East of road to Talc Mine in Cody Mountains. Reference Point: Top of 1 inch well cover at northwest corner inside of curb at ground level.

Elevation of reference point: 1778.8

	Date		R.P. to surface		Date		Dist. R.P. to water surface
May	8, 1930	:	30.4	:	May 18, 1932	:	30.5

L-91

Location and Description: Near center of west line of SW_{4}^{1} , Sec. 30, T.10 N., R.4 E., S.B.B.& M., approximately 1000 feet southeast of fence corner of southeast corner of old Camp Cady Military Reservation. Two wells in dug pit.


Use: Not used.

Reference Point: 3 notches in wood curb on east at ground level. Moasure well with high casing.

Elevation of reference point: 1776.2

Date	: Dist. R.P. to : water surface		Dist. R.P. to water surface
Nov. 21, 1919	: * 37.1	: May 18, 1932	:
May 9, 1930	: 36.0		: 37.4

^{*} Measurement from W.S.P. 578, page 465, Well 27.

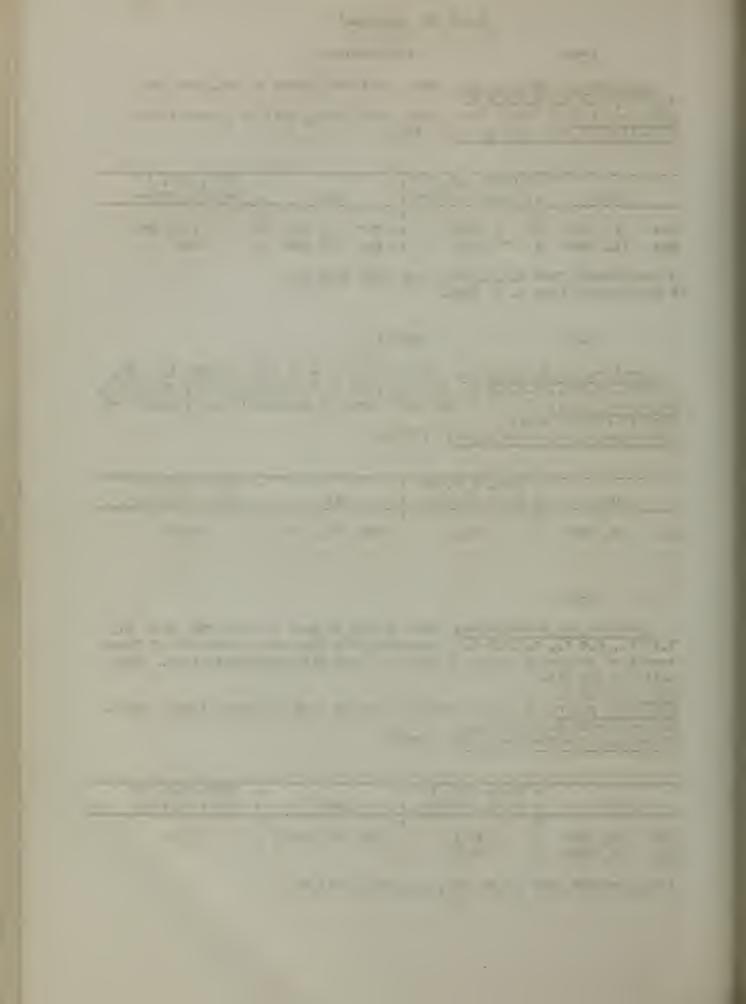

L-92

Frank Sherman

Location and Description: In southwest corner of SW_{4}^{\perp} , Sec. 6, T.9 N., R.4 E., S.B.E.& M. East of round reservoir. Reference Point: Top of tie with 3 notches at northwest corner of pit 0.6 feet above ground level. Elevation of reference point: 1800.1

Date	• -	st. R.P. to	-		Date			Dist. R.P. to water surface
May 8, 1930	:	27.1	:	May	19,	1932	:	27.2
Aug. 26, 1931	:	27.3	:				:	

L-93

Nicholas

Location and Description: Near south line of NE., Sec. 12, T.9 N., R.3 E., S.B.B.& M.

Use: Not used. Formerly domestic.

Reference Point: Top of 4" x 6" under iron pump base and 0.7 feet above 5.0 foot circular concrete curb at ground level.

Elevation of reference point: 1801.2

	Da	te		oist. R.P. to			Date	9		Dist. R.P. to water surface
More	27	1022	:	* 23.8	:	Morr	10	1072	:	a 27.6
May May		1922 1930	:			May July				24.6
			:			Feb.				24.8

L-94

Spencer

Location and Description: In southeast corner of Sec. 11, T.10 N., R.3 E., S.B.B.& M. Dug well 600 feet west of highway opposite Station 685+00 and south of gravel plant at foot of hill. Use: Not used.

Reference Point: Top of timber under 2 inch wooden cover at ground level. Elevation of reference point: 1796.0

Date	 st. R.P. to	•		Date	•	Dist. P.P. to water surface
12, 1919 21, 1922	* 114.5 ** 115.6		Dec.	•		** 114.1 114.1

^{*} Measurement from W.S.P. 578, page 464, Well 19.

a - Windmill pumping.

^{**} Measurement from W. P. Rowe.

L-95

Location and Description: Near center of Sec. 12, T.10 N., R.3 E., S.B.& M. 600 feet west of Highway opposite Station 722+00. North of gravel plant. Frame of ties with hook over well. Small galvanized shack 400 feet south of well.

Use: Not used.

Reference Point: Top 12 inch casing 1.3 feet above ground.

Elevation of reference point: 1786.0

 Date	•	R.P. to	De	te	•	Dist. R.P. to water surface
13, 1919 21, 1922	•	111.0	Dec. 1:			**109.1 109.1

^{*} Measurement from W.S.P. 578, page 464, Well 20.

L-96

Location and Description: In southeast corner of Sec. 6, T.10 N., R.4 E., S.B.F.& M. 600 feet west of Highway, opposite Station 800+00. Use: Domestic.

Reference Point: Top of battered casing, 0.2 feet above ground.

Elevation of reference point: 1761.5

Date	: Dist. R.P. to : water surface	•	: Dist. K.P. to : water surface
13, 1919	* 98.0	: July 14, 1932	98.3
24, 1930	: 98.3	: Mar. 30, 1934	98.3

* Measurement from W.S.P. 578, page 465, Well 30.

L-97

G. F. Getty

Location and Description: In northeast corner of Sec. 21, T.10 N., R.3 E., S.B.b.& M. Old plunger pump and gas engire in shed south of adobe, and east of Harvard Station.

Reference Point: Top of casing 0.3 feet above ground.

Elevation of reference point: 1820.2

Date	: Dist. R.P. to : water surface		: Pist. R.P. to : water surface
Nov. 12, 1919	: ** 80.9	: May 24, 1930	: 80.9
May 17, 1922		: Feb. 23, 1933	: 80.8
Dec. 15, 1922		: Mar. 30, 1934	: 81.0

^{*} Measurement from W.S.P. 578, page 464, Well 12, corrected for change in reference point.

^{**} Measurement from W. P. Rowe.

^{**} Measurement from W. P. Rowe.

100

the sale.

1 - 17 - 17 14 -- -- -- -- -- --

L-99

C. L. Wright

Location and Description: Near center of Sec. 27, T.10 N., R.3 E., S.B.B.& M. Windmill south of stucco house. 4 foot round reservoir east of well.

Use: Domestic.

Reference Point: Top of 7 inch casing 1.1 feet above ground. Elevation of reference point: 1762.6

	Date	•	Dist. R.P. to water surface	•	Γιε	ate		•	Dist. R.P. to water surface
May	24, 1930	:	7.1	:	Apr.	28,	1932	:	6.8

L-100

Cady Ranch

Location and Description: Near center of $SW_{\frac{1}{4}}^{\frac{1}{4}}$, Sec. 19, T.10 N., R.4 E., S.B.3.& M. Flowing well at Camp Cady.

Use: Irrigation.

Reference Point: Top of 2 inch spout extending from 5 inch casing. Spout is 2.6 feet above top of 12 inch casing at ground and 3.0 feet below top 5 inch casing.

Elevation of reference point: 1700.0

	Dat	e		Dist. R.P. to water surface			Date			Dist. F.P. to water surface
May	7,	1930	:	+3.0+	:	Mar.	29,	1932	:	3. +
Jan. Aug.				+3.0+ 3. +	:	Feb.	15,	1933	:	3. +

L-100 A

Location and Description: In $SW_{\frac{1}{2}}^{1}$, Sec. 19, T.10 N., R.4 E., S.B.B.& M., Well is near tank tower at Camp Cady.

Use: Domestic.

Reference Point: Top of 10 inch casing 3.6 feet below sill of building. Elevation of reference point: 1713.5

		: Dist. P.F	•		-	. R.P. to	
	Date	: water sur	Tace :	Date	: Wate	r surface	 .
		:	:		:		
Feb.	15, 1933	: 2.7	:		:		

... 50. . ; - 201 1-01 0-----

Table 44


Areas of Natural Vegetation on Different Soil Classifications in Mojave River Bottom


District or	: Soil :	A	mount of	Alkali		Total Acres
	: Class :		:Slight:			
	:		: :	:	:	
Mountains to Victorville	: 1 :	100	: 0:	0:	0:	100
	: 2 :	279	: 0:	0:	0:	279
	: 3 :	25	: 0:	0:	0:	25
	: 4 :	80	: 0:	0:	0:	80
	: 5 :	: 0	: 0:	0:	0:	0
	: 6 :	216	: 0:	0:	0 :	216
	:		: :	;		
	: Total :	700	: 0:	0:	0 :	700
			: :			
Victorville to Hodge	: 1	12	: 0:	_	0 :	12
	_		: 570	0:	0 :	868
			: 114 :		0 :	551
			: 40 :	· _	0 :	67
			: 0 :		5	943
	: 6	237	: 0		0 :	237
	•		:			
	: Total :	1854	: 724	^-	5	2678
			-	;		
Hodge to Barstow	: 1	_	: 0:		0 :	0
noego oo barbook	_		: 80 :		0 :	
	_		: 157 :		0	374
			: 278		0	316
	: 5	451			35	486
	: 6		: 0		0 :	0
	:		:			
	: Total	681	: 515		35	1256
		:	:	:		
Barstow to Cady Mts.	: 1	. 0	: 0:	0:	0 :	0
	_		: 327 :	0:	0 :	367
			: 761 :	: 14:	0 :	1009
			: 0:		40 :	60
			: 0		0 :	
	. 6		: 0:		0 :	
	•	·	•		•	
	: Total	2039	: 1088	14:		
A STATEMENT OF SECTION ASSESSED ASSESSED ASSESSED ASSESSED AS ASSESSED AS			:	:		
GRANL TOTAL	:	: 5274	: 2327	134:	80	7815
	:	:	:	: :		
	-					


		S 0 000
	- 1-	
*		
*		
	- 15	
	- 15	





					-
			1 - 1 - 1		
		Ţ.			
1-					
		1			
		-			
				· ·	
	9.				
		-			

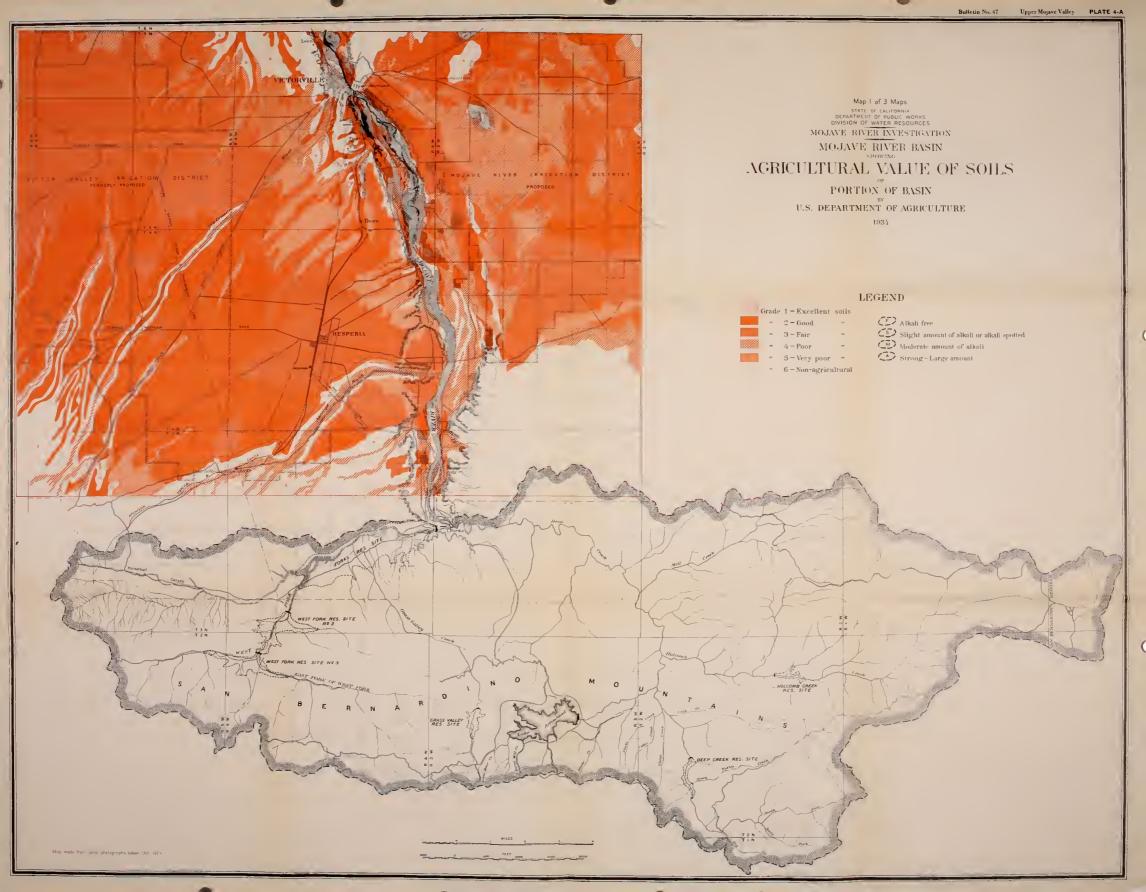


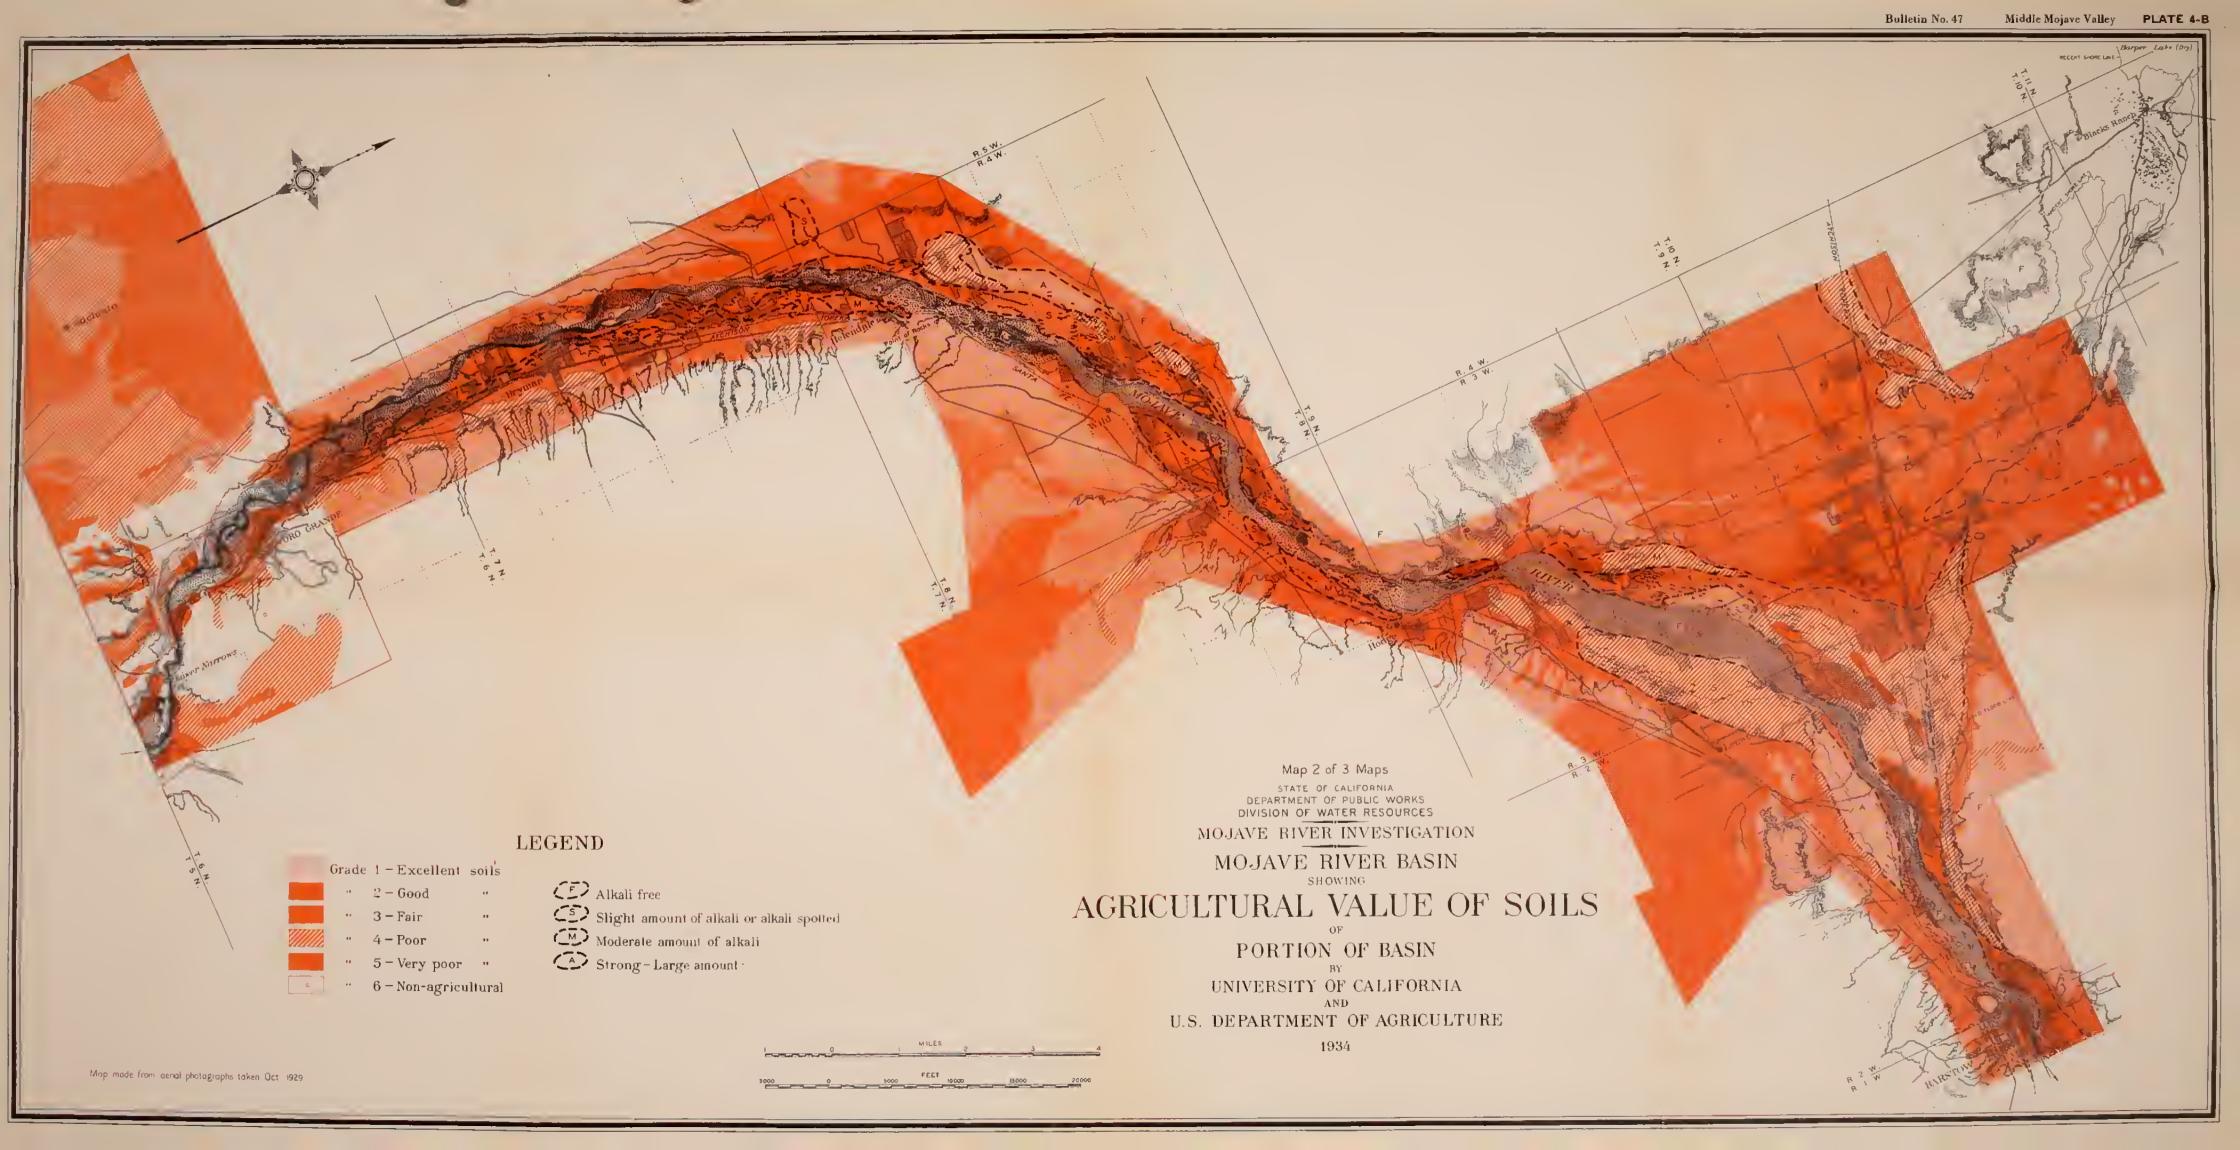

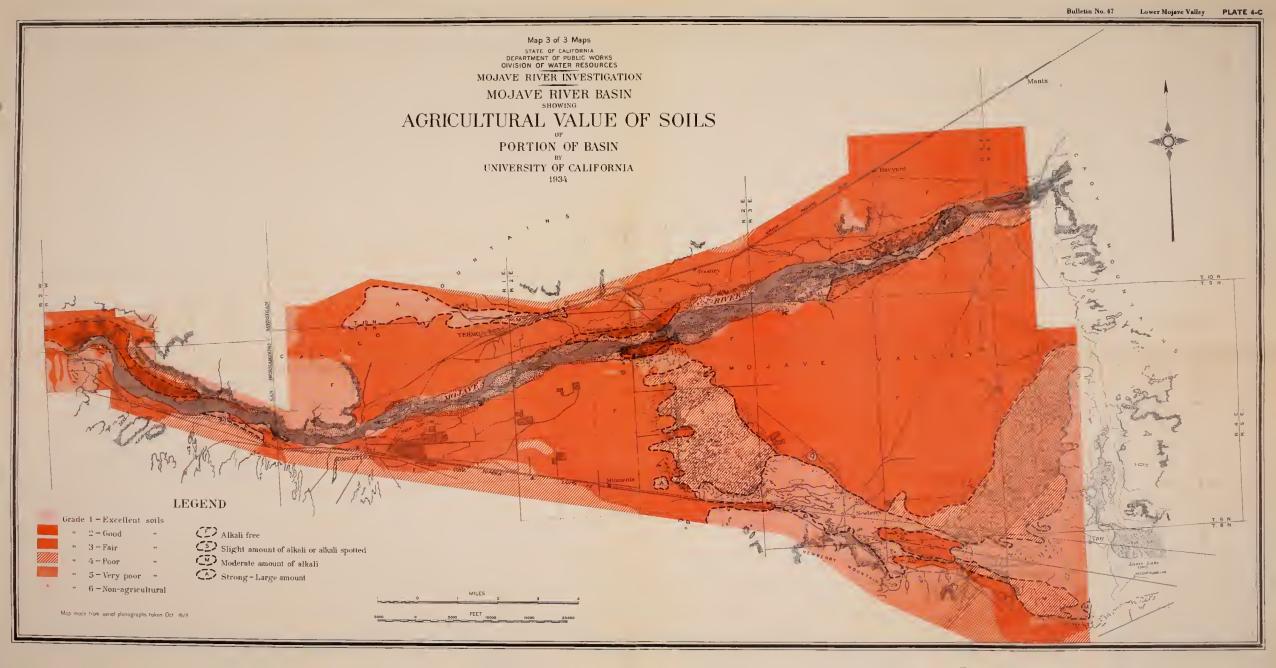


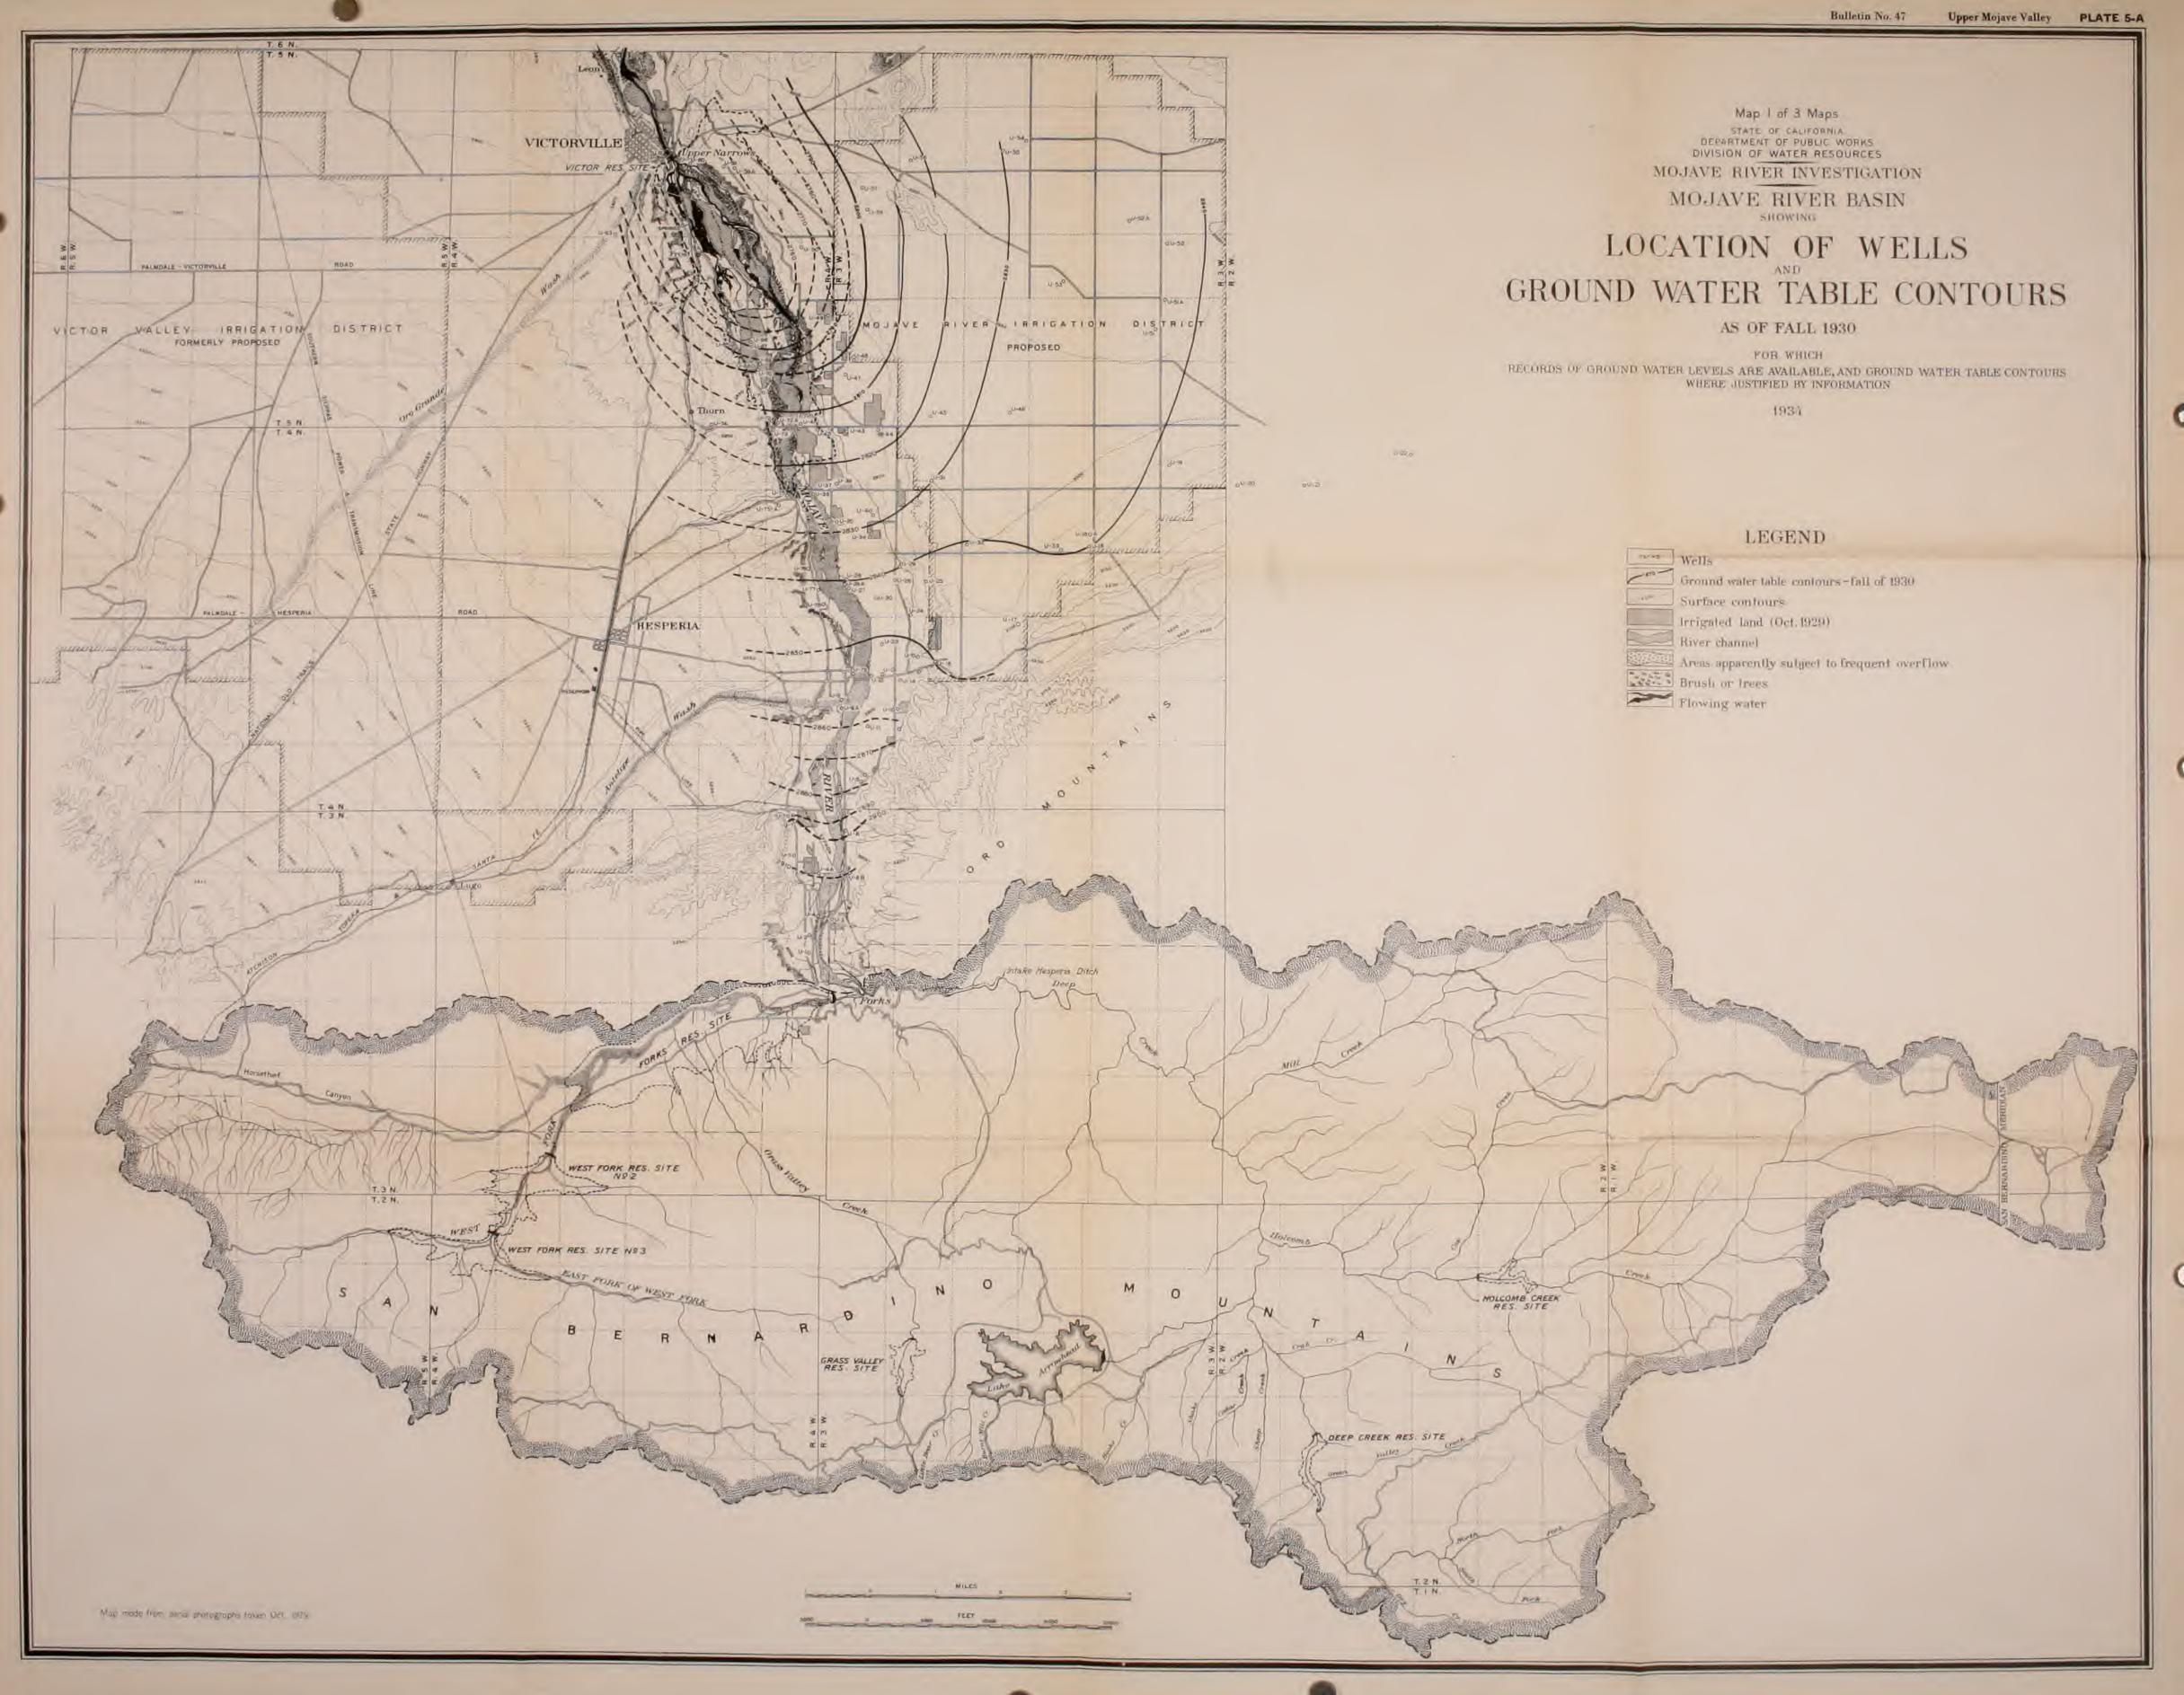

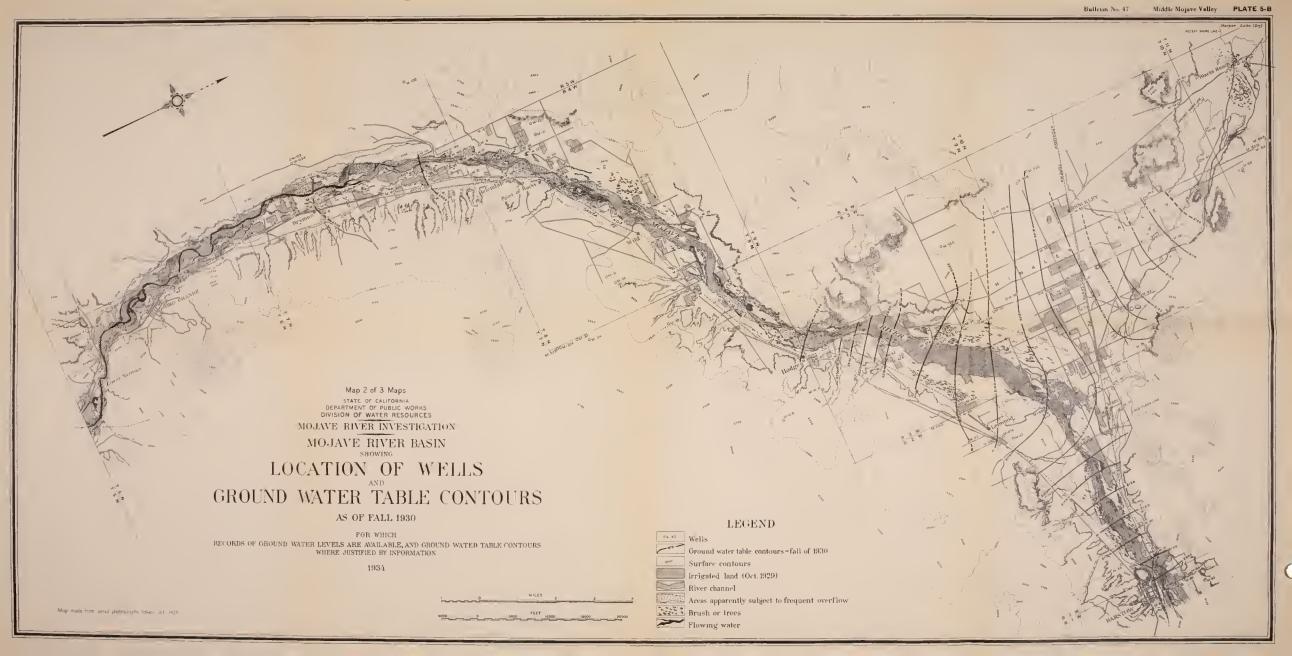

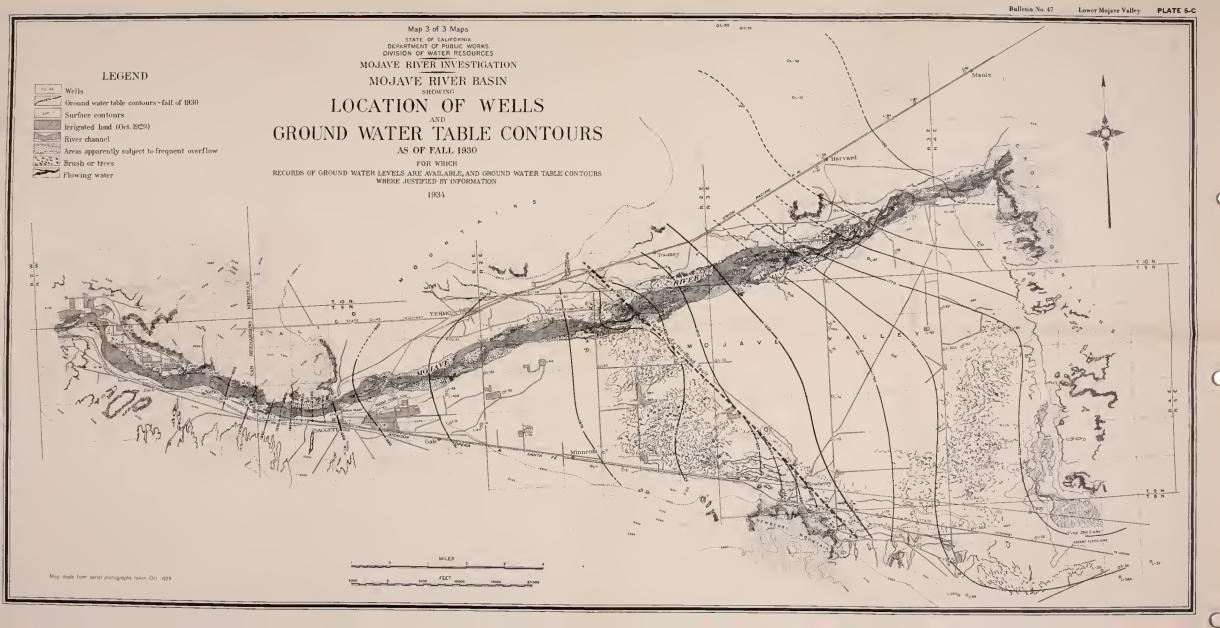



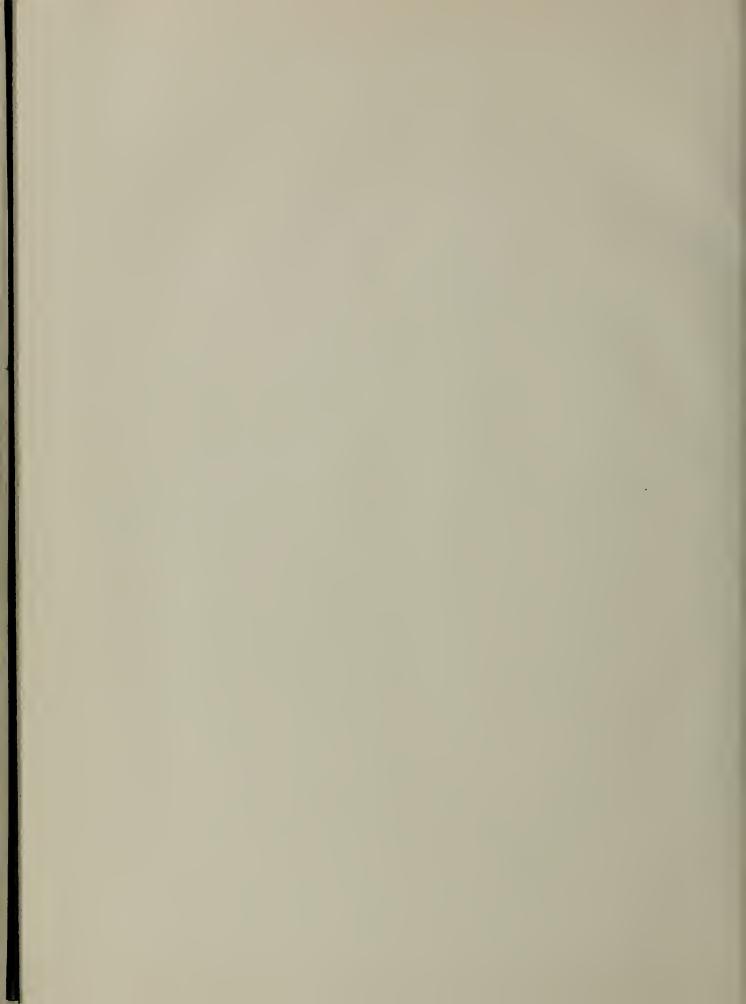



THIS BOOK IS DUE ON THE LAST DATE STAMPED BELOW

AN INITIAL FINE OF 25 CENTS

WILL BE ASSESSED FOR FAILURE TO RETURN THIS BOOK ON THE DATE DUE. THE PENALTY WILL INCREASE TO 50 CENTS ON THE FOURTH DAY AND TO \$1.00 ON THE SEVENTH DAY OVERDUE.

JUN 3 0 1991

PHYS SCI LIBRARY

Book Slip-25m-7,'53 (A8998s4)458

Calif. Division of water resources.	TC821 ₄ C2 A2	
PHYSICAL SCIENCES LIBRARY	T282	L



LIBRARY UNIVERSITY OF CALIFORNIA DAVIS

111610

